

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.34	Ohms
2	Fs	67.42	Hz
3	Re	6.41	Ohms[dc]
4	Res	69.82	Ohms
5	Qms	8.47	
6	Qes	0.78	
7	Qts	0.71	
8	L1	0.48	mH
9	L2	0.67	mH
10	R2	2.04	Ohms
11	RMSE-load	0.36	Ohms
12	Vas(Sd)	55.23	liters
13	Mms	39.95	grams
14	Cms	139	$\mu\text{M}/\text{Newton}$
15	B1	11.81	Tesla-M
16	SPLref(Sd)	95.2	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (29.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.26 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -24.4% (-20% to -50% is recommended).


FANE KC 12-100C

MLSSA: Parameters

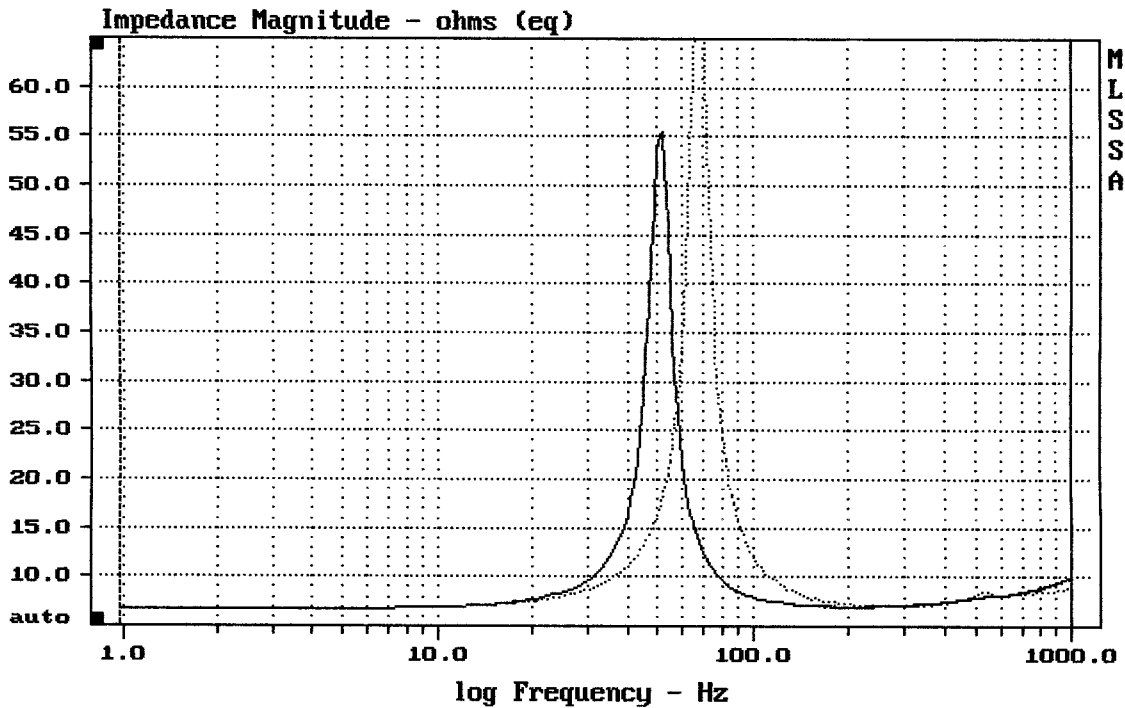

CURSOR: dy = -0.881276 x = 1000.9766 (1025)

MLSSA: Frequency Domain

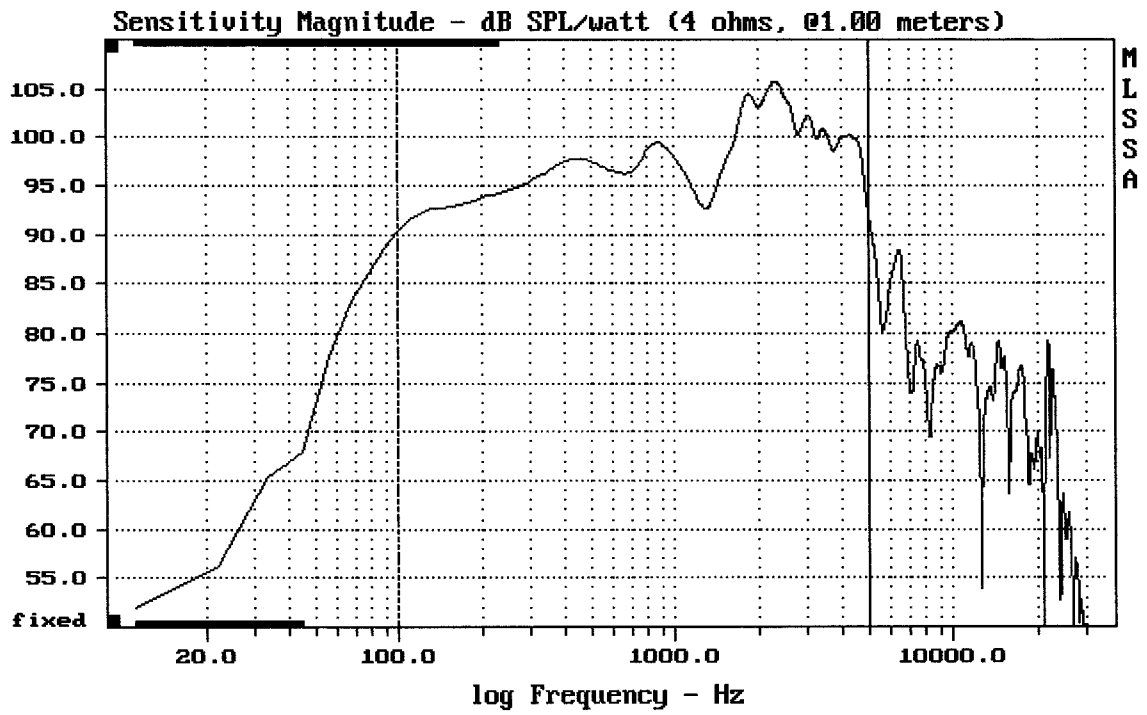

Level (100:5005 Hz) = 98.76 dB SPL/watt (4 ohms, @1.00 meters)

KC12/100C

MLSSA: Frequency Domain