

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.31	Ohms
2	Fs	45.01	Hz
3	Re	5.66	Ohms[dc]
4	Res	52.27	Ohms
5	Qms	5.14	
6	Qes	0.56	
7	Qts	0.50	
8	L1	0.76	mH
9	L2	1.16	mH
10	R2	4.64	Ohms
11	RMSE-load	0.42	Ohms
12	Vas(Sd)	164.14	liters
13	Mms	73.61	grams
14	Cms	170	$\mu$ M/Newton
15	B1	14.55	Tesla-M
16	SPLref(Sd)	96.1	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (60.00 grams)

Area (Sd): 829.58 sq cm


DCR mode: Measure (-0.08 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -24.5% (-20% to -50% is recommended).

FANE N-LITE 15MB

MLSSA: Parameter:

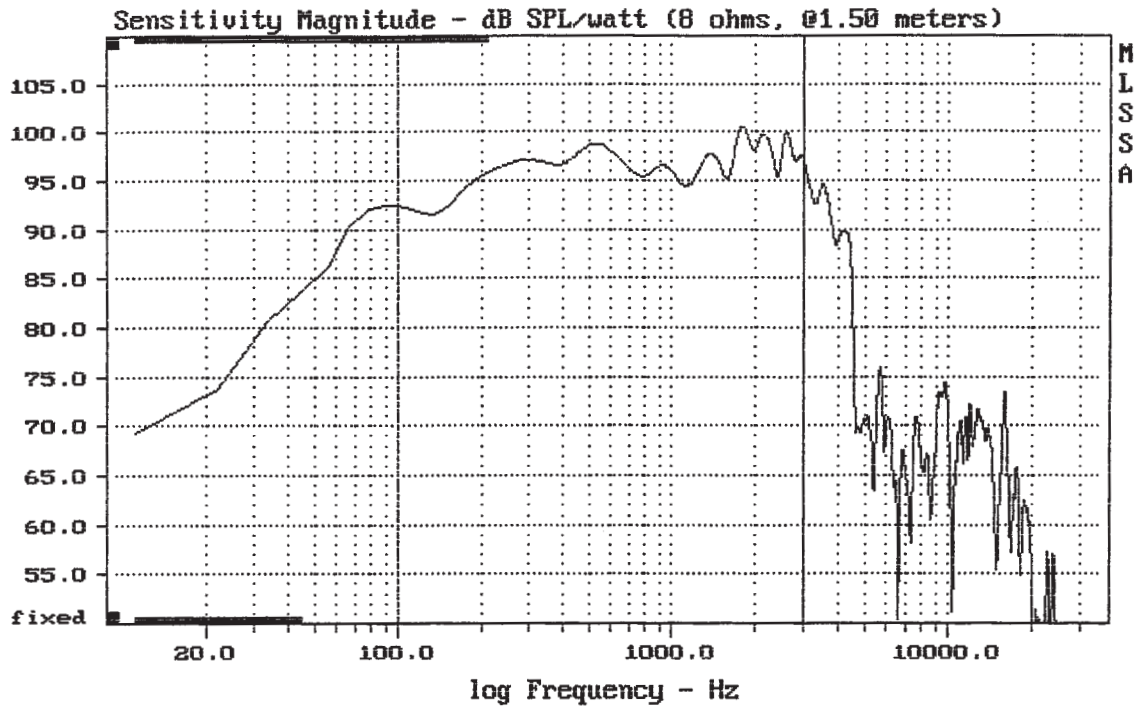


---


Level (100:3007 Hz) = 96.63 dB SPL/watt (8 ohms, @1.50 meters)

---

FANE N-LITE 15MB

4-10-81 7:33 PM

MLSSA: Frequency Domain

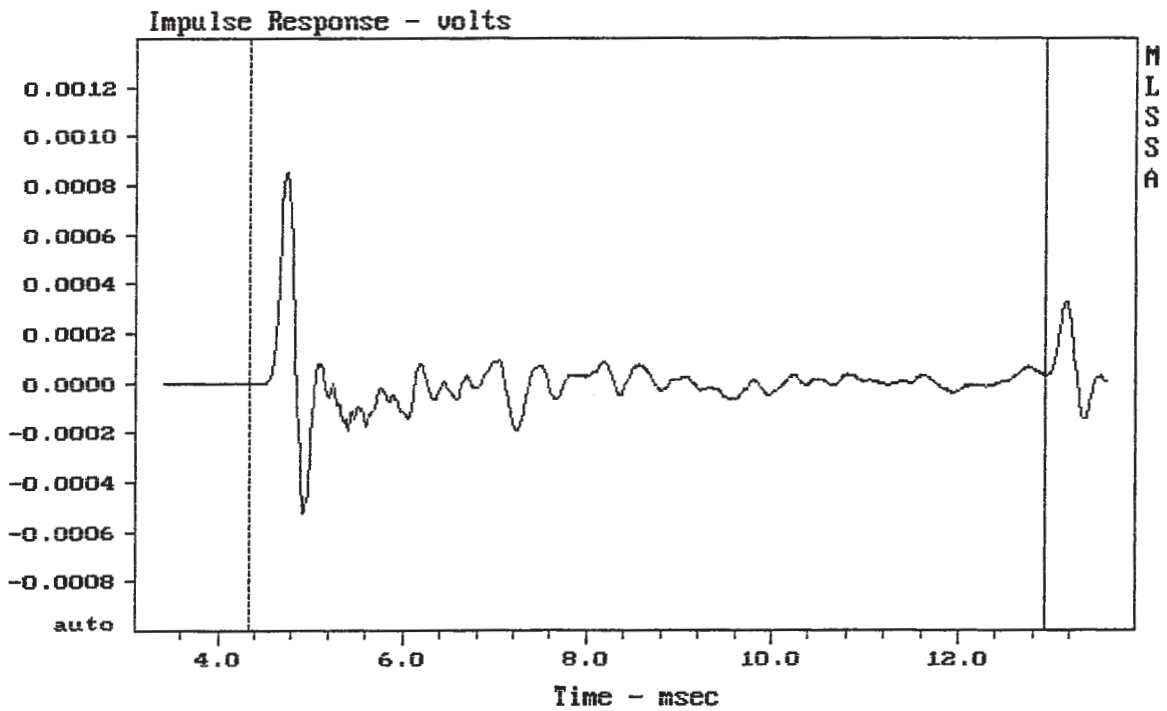


---

CURSOR: y = 2.72928e-005 x = 12.9250 (1175)

---

FANE N-LITE 15MB