


Level (100:5005 Hz) = 97.50 dB SPL/watt (8 ohms, @1.00 meters)

EMINENCE GAMMA 12

MLSSA: Frequency Domain

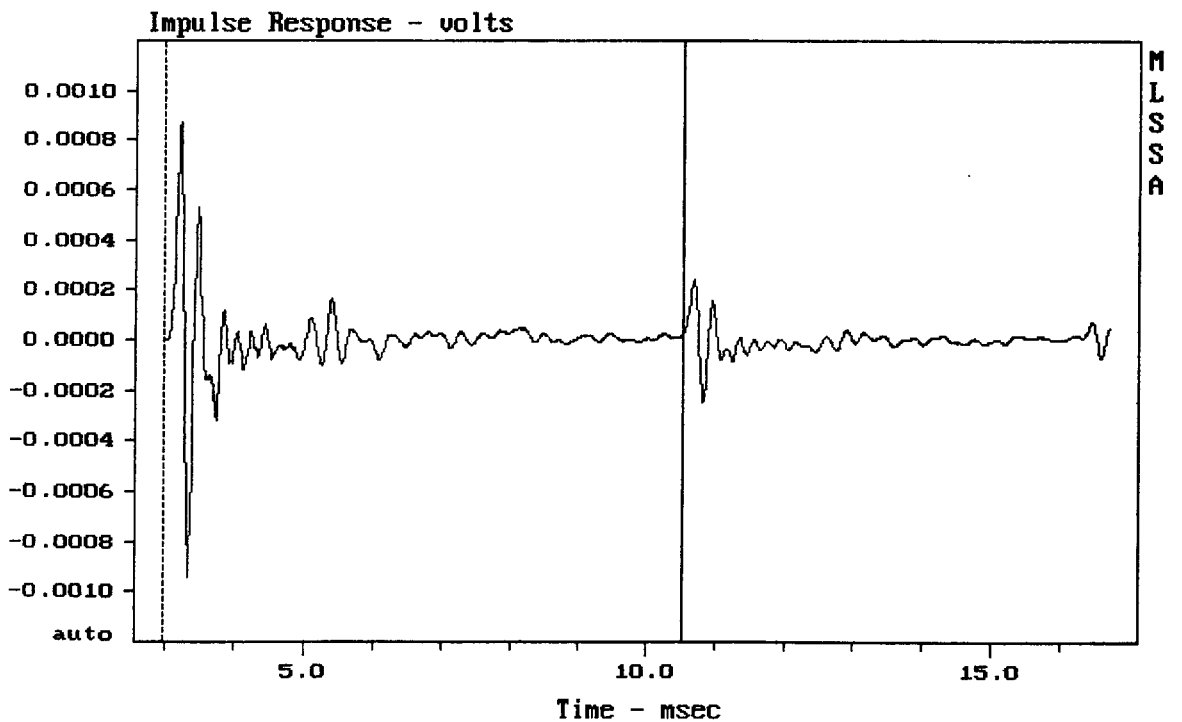

CURSOR: y = 2.1531e-005 x = 10.5380 (958)

EMINENCE GAMMA 12

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.28	Ohms
2	Fs	63.60	Hz
3	Re	6.17	Ohms[dc]
4	Res	47.97	Ohms
5	Qms	5.92	
6	Qes	0.76	
7	Qts	0.68	
8	L1	0.73	mH
9	L2	0.92	mH
10	R2	3.55	Ohms
11	RMSE-load	0.48	Ohms
12	Vas(Sd)	76.28	liters
13	Mms	32.50	grams
14	Cms	193	$\mu\text{M}/\text{Newton}$
15	Bl	10.26	Tesla-M
16	SPLref(Sd)	95.9	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (40.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -31.3% (-20% to -50% is recommended).

EMINENCE GAMMA 12

MLSSA: Parameters

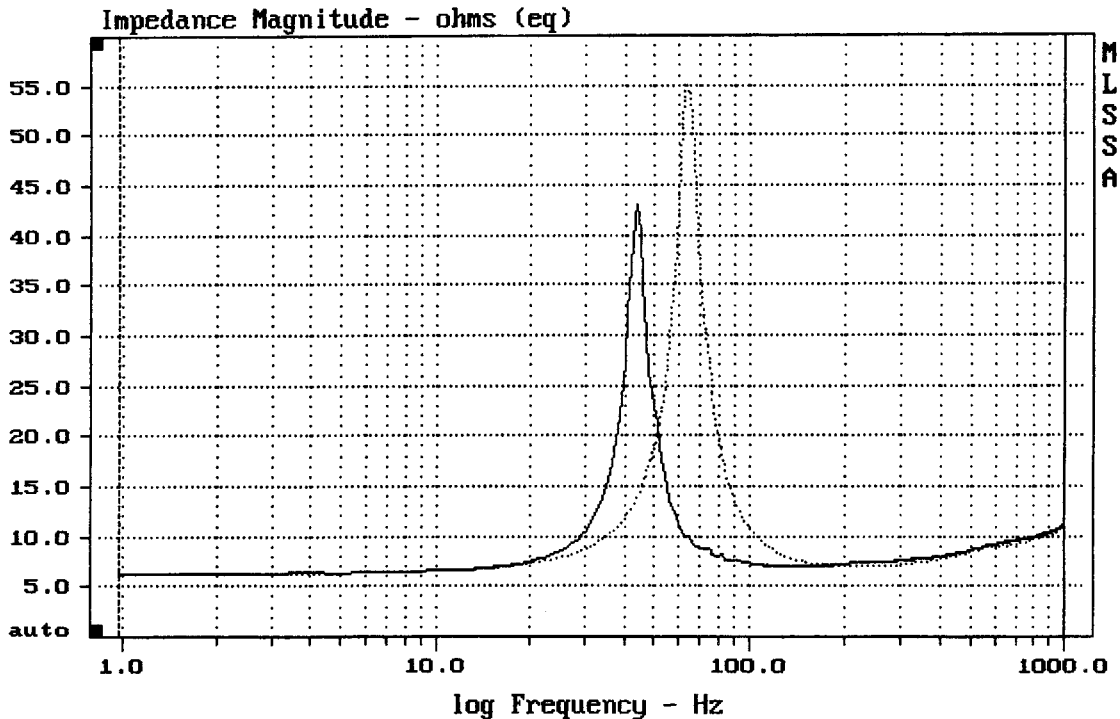

CURSOR: dy = -0.302318 x = 1000.9766 (1025)

DTTO

MLSSA: Frequency Domain