


Level (100:3507 Hz) = 96.29 dB SPL/watt (8 ohms, @1.50 meters)

GEMINI GW-1516

MLSSA: Frequency Domain

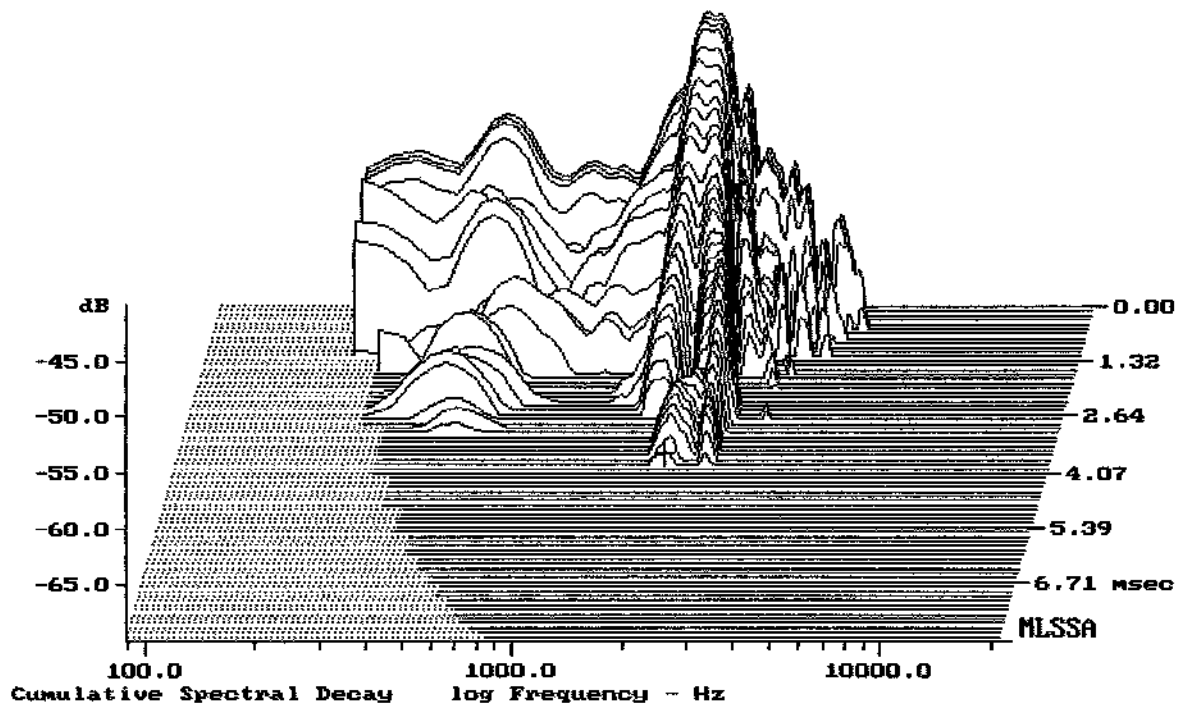

-68.92 dB, 1909 Hz (43), 3.850 msec (36)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.44	Ohms
2	Fs	36.15	Hz
3	Re	7.32	Ohms[dc]
4	Res	132.75	Ohms
5	Qms	19.10	
6	Qes	1.05	
7	Qts	1.00	
8	L1	0.98	mH
9	L2	1.30	mH
10	R2	5.34	Ohms
11	RMSE-load	0.37	Ohms
12	Vas(Sd)	214.77	liters
13	Mms	92.70	grams
14	Cms	209	$\mu\text{M}/\text{Newton}$
15	B1	12.10	Tesla-M
16	SPLref(Sd)	91.7	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.09 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -26.9% (-20% to -50% is recommended).

GEMINI GW-1516 FROM GEMINI GSM-1520

MLSSA: Parameters

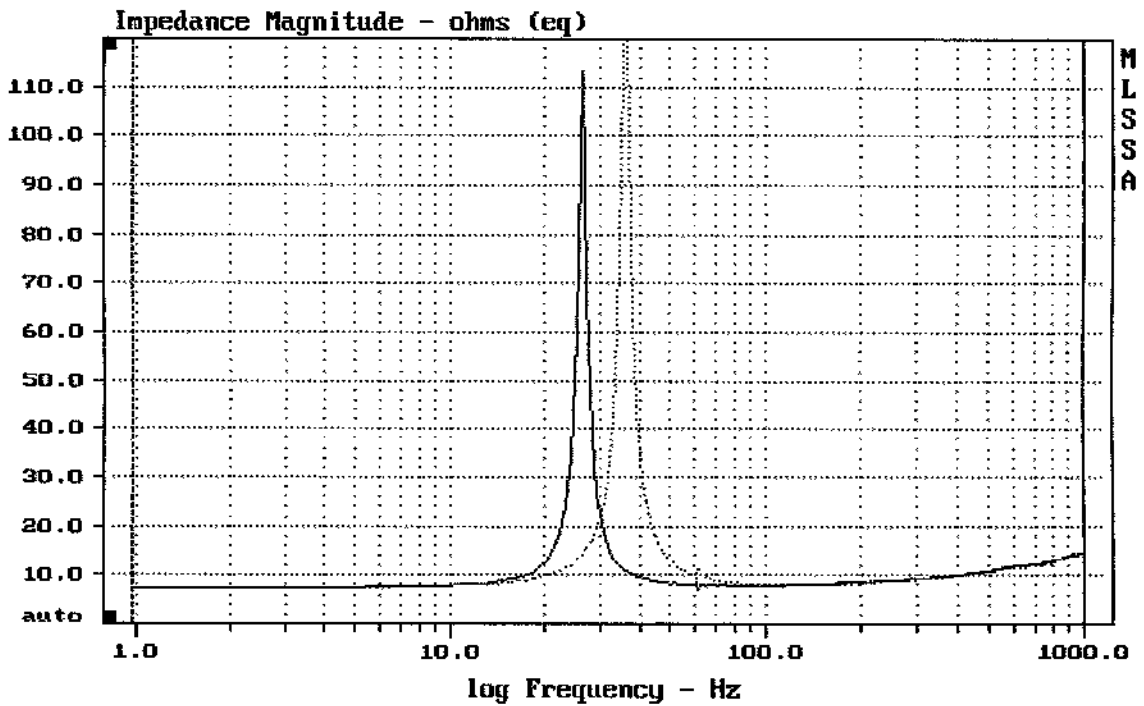

mean: 11.53, rms: 13.3, std: 6.614, max: 141.8, min: 7.414

MLSSA: Frequency Domain