

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.80	Ohms
2	Fs	31.47	Hz
3	Re	5.13	Ohms[dc]
4	Res	186.15	Ohms
5	Qms	10.59	
6	Qes	0.29	
7	Qts	0.28	
8	L1	0.70	mH
9	L2	1.41	mH
10	R2	7.35	Ohms
11	RMSE-load	0.70	Ohms
12	Vas(Sd)	383.86	liters
13	Mms	64.42	grams
14	Cms	397	$\mu\text{M}/\text{Newton}$
15	B1	14.96	Tesla-M
16	SPLref(Sd)	98.0	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 829.58 sq cm


DCR mode: Measure (-0.09 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -26.3% (-20% to -50% is recommended).

EMINENCE KAPPA 15


MLSSA: Parameters

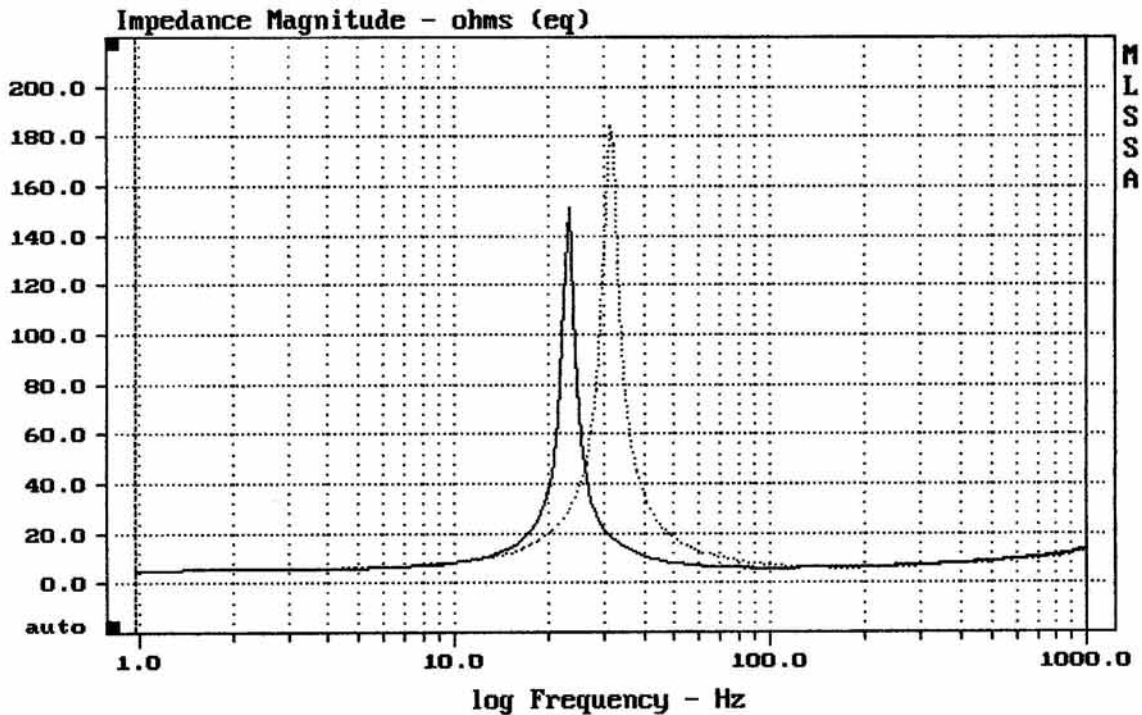

CURSOR: dy = -1.55268 x = 1000.9766 (1025)

DITO


MLSSA: Frequency Domain

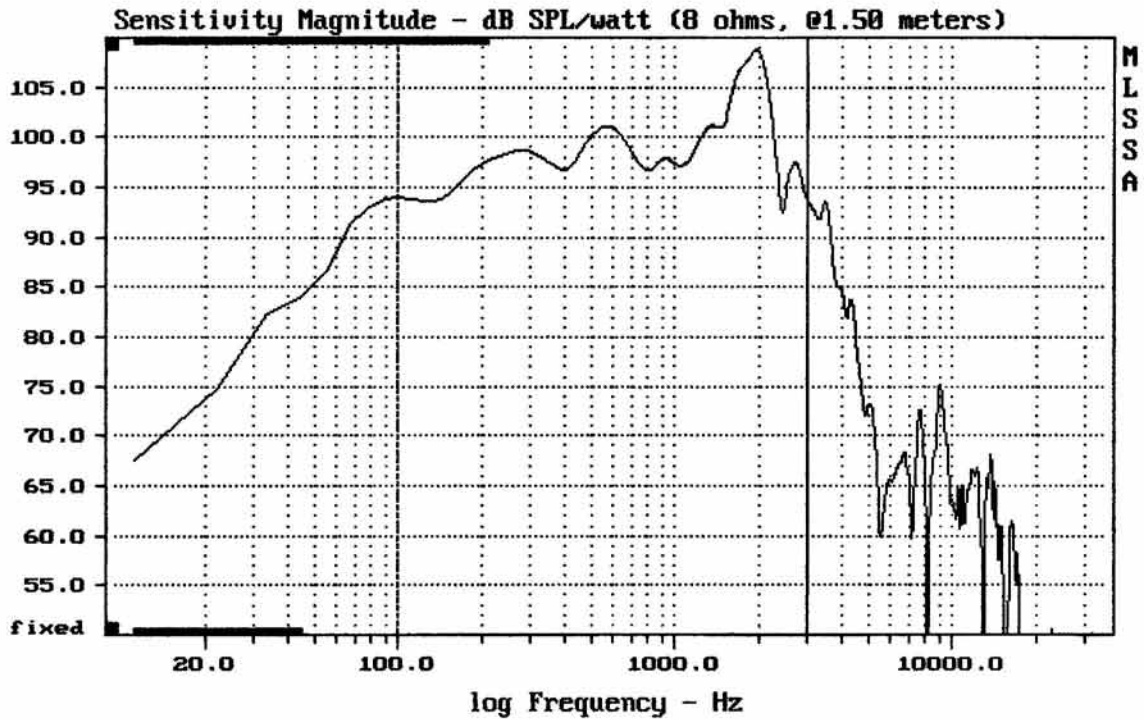

Level (100:2996 Hz) = 100.35 dB SPL/watt (8 ohms, @1.50 meters)

EMINENCE KAPPA 15

MLSSA: Frequency Domain

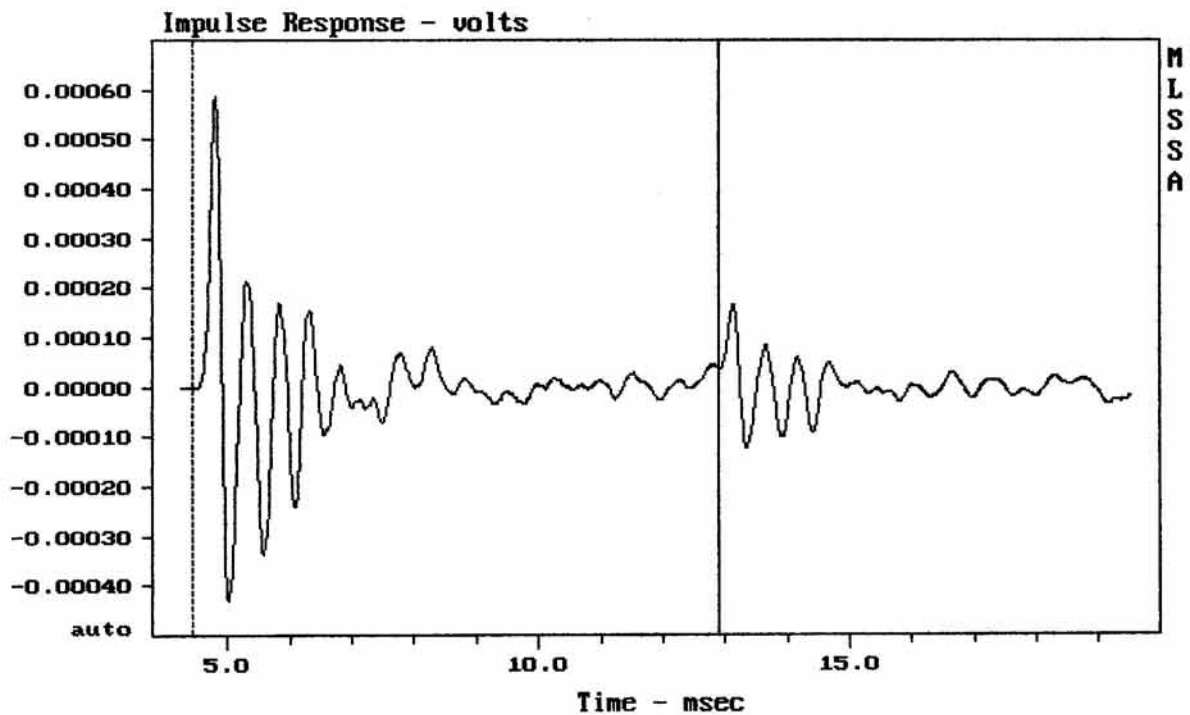

mean: -4.162e-007, rms: 0.0001132, std: 0.0001132, max: 0.000586, min: -0.0004

EMINENCE KAPPA 15