

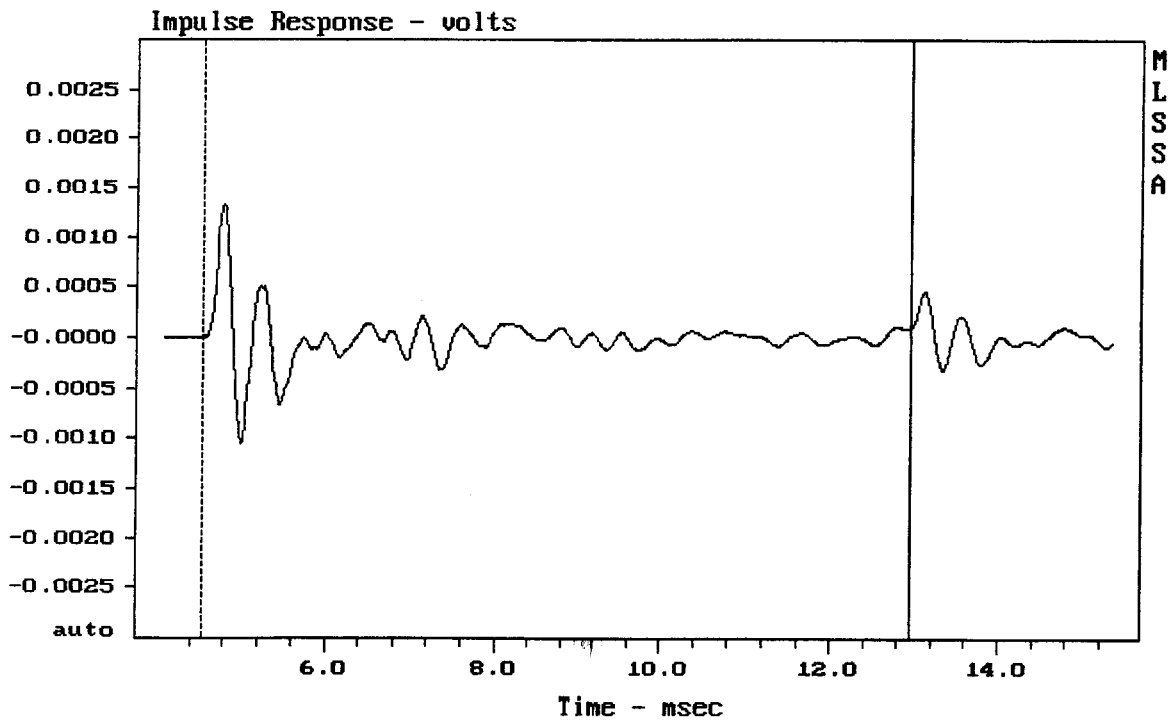

---

Level (100:3007 Hz) = 98.32 dB SPL/watt (8 ohms, @1.50 meters)

---

EMINENCE KAPPA 15LF

MLSSA: Frequency Domain




---

CURSOR: y = 0.000112432 x = 12.9580 (1178)

---

EMINENCE KAPPA 15LF

MLSSA SPO 4.0D #960903-3057-3075

QC Limits

Measured Data

Line	Parameter	Value	Units
1	RMSE-free	0.69	Ohms
2	Fs	46.12	Hz
3	Re	5.60	Ohms[dc]
4	Res	109.81	Ohms
5	Qms	8.20	
6	Qes	0.42	
7	Qts	0.40	
8	L1	0.96	mH
9	L2	1.68	mH
10	R2	6.48	Ohms
11	RMSE-load	0.65	Ohms
12	Vas(Sd)	131.62	liters
13	Mms	92.95	grams
14	Cms	128	$\mu\text{M}/\text{Newton}$
15	B1	19.00	Tesla-M
16	SPLref(Sd)	96.7	dB[Re]
17	Rub-index	0.02	

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm

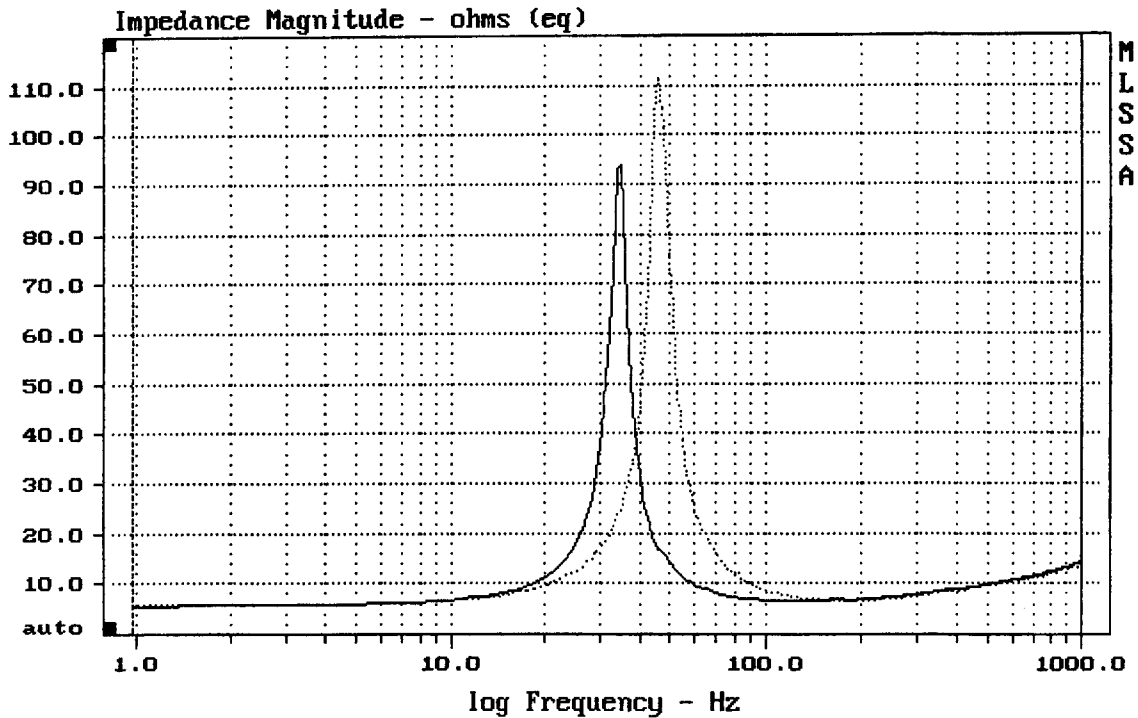
DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -25.3% (-20% to -50% is recommended).

EMINENCE KAPPA 15LF

MLSSA: Parameters



CURSOR: dy = -0.989966 x = 1000.9766 (1025)

DTTO

MLSSA: Frequency Domain