

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.75	Ohms
2	Fs	25.02	Hz
3	Re	7.66	Ohms[dc]
4	Res	172.69	Ohms
5	Qms	8.74	
6	Qes	0.39	
7	Qts	0.37	
8	L1	1.39	mH
9	L2	1.90	mH
10	R2	7.28	Ohms
11	RMSE-load	0.61	Ohms
12	Vas(Sd)	557.85	liters
13	Mms	131.07	grams
14	Cms	309	$\mu\text{M}/\text{Newton}$
15	Bl	20.18	Tesla-M
16	SPLref(Sd)	95.4	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 1134.11 sq cm


DCR mode: Measure (-0.09 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -20.7% (-20% to -50% is recommended).

EMINENCE KAPPA 18


MLSSA: Parameters

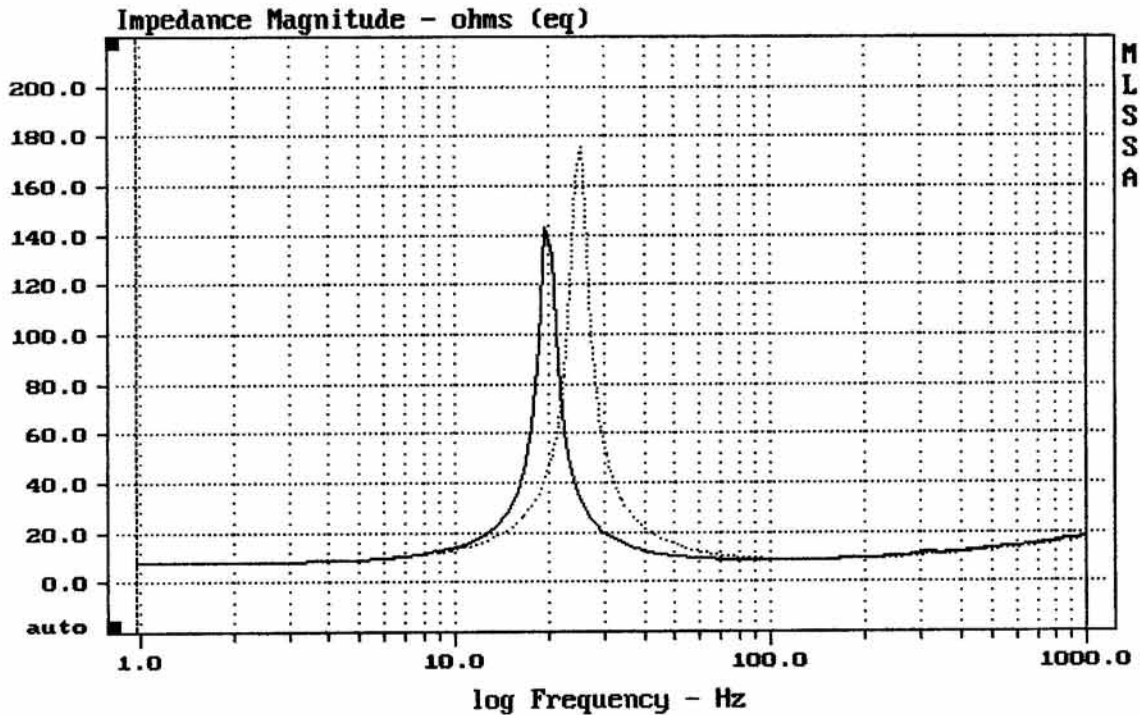

CURSOR: dy = -0.444048 x = 1000.9766 (1025)

DTTO


MLSSA: Frequency Domain

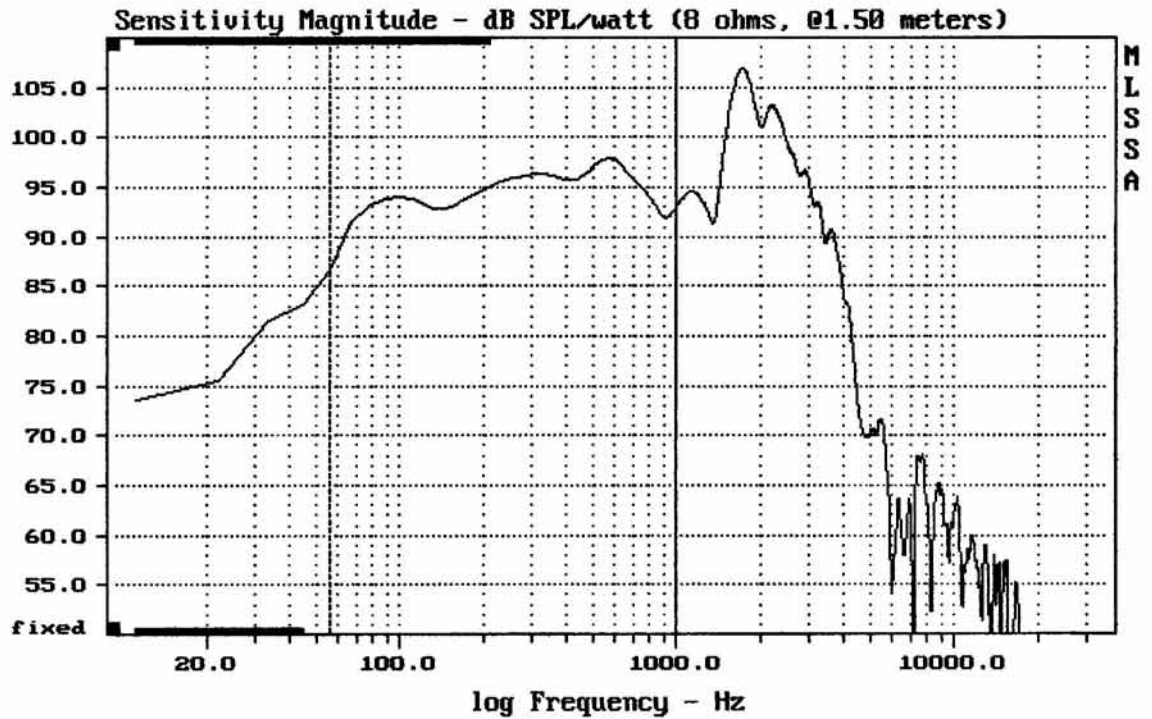

Level (55:999 Hz) = 94.73 dB SPL/watt (8 ohms, @1.50 meters)


EMINENCE KAPPA 18

MLSSA: Frequency Domain

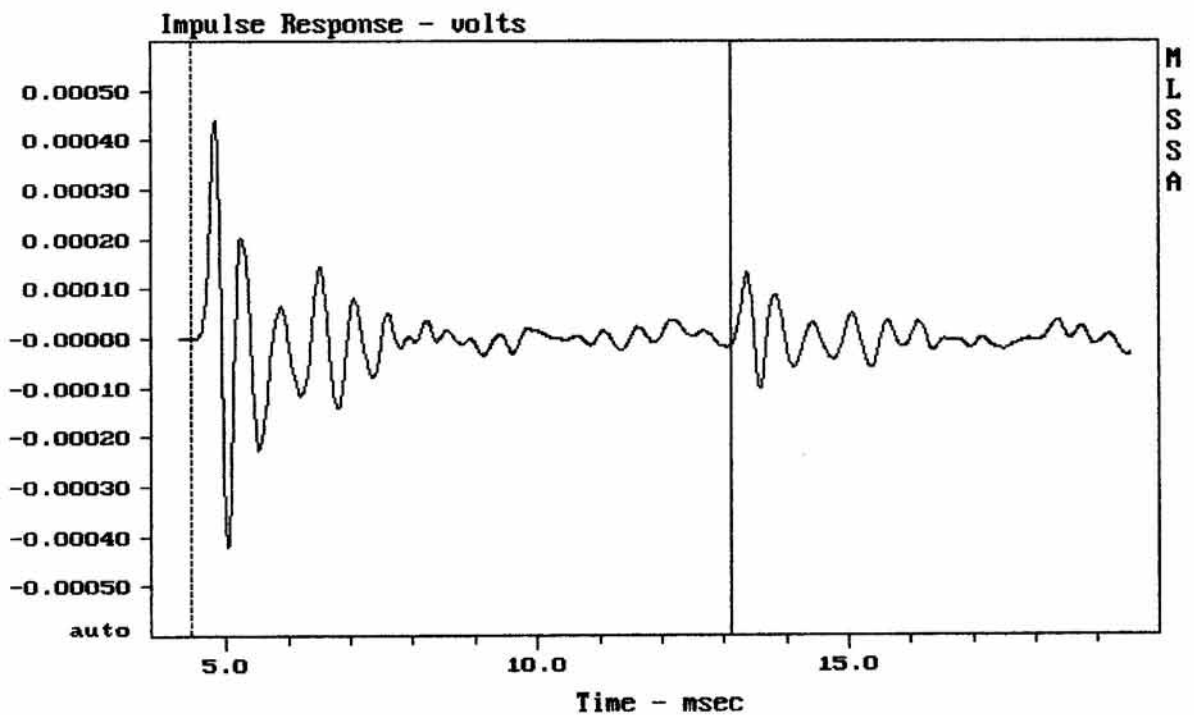

mean: -1.029e-006, rms: 8.942e-005, std: 8.941e-005, max: 0.0004403, min: -0.0


EMINENCE KAPPA 18

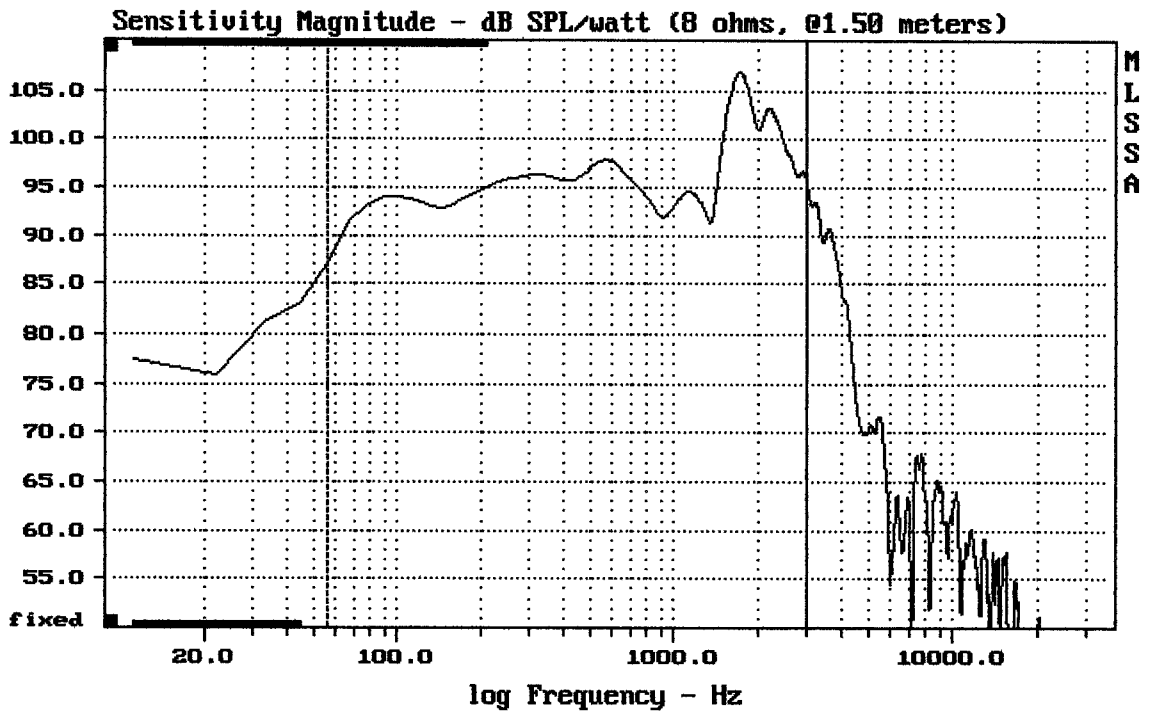


Level (55:2996 Hz) = 97.58 dB SPL/watt (8 ohms, @1.50 meters)

EMINENCE KAPPA 18

MLSSA: Frequency Domain

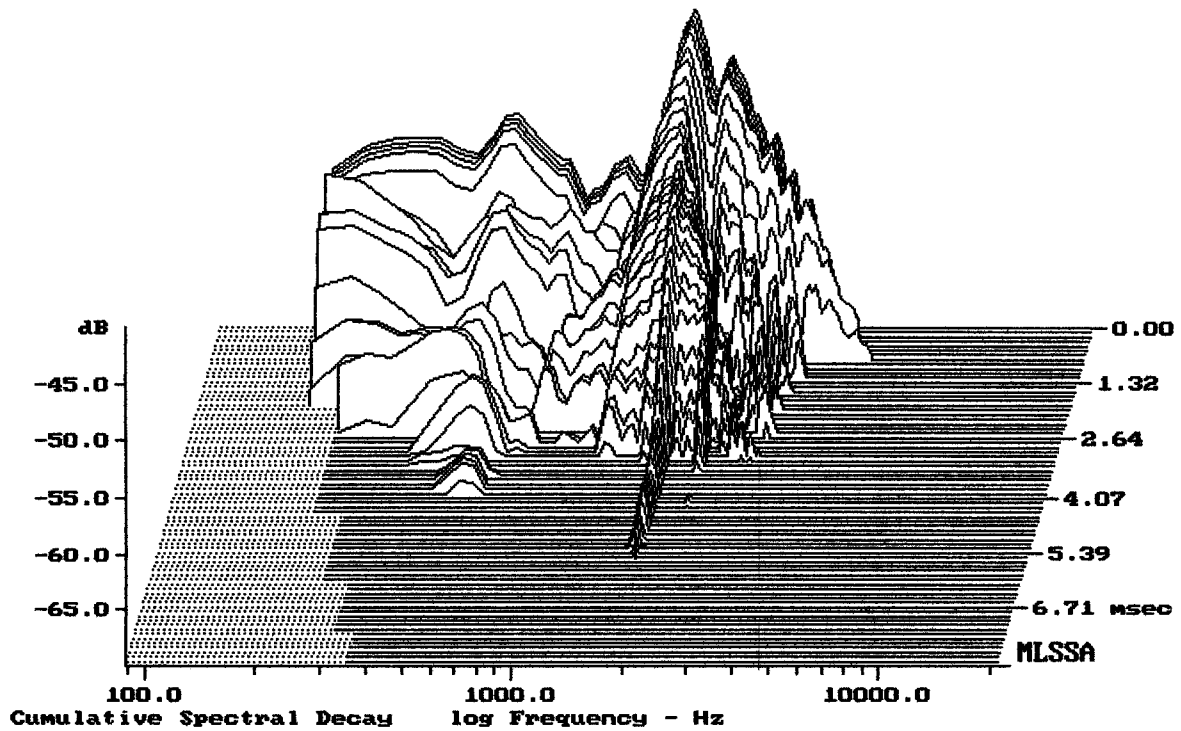


-69.28 dB, 1776 Hz (40), 5.390 msec (50)

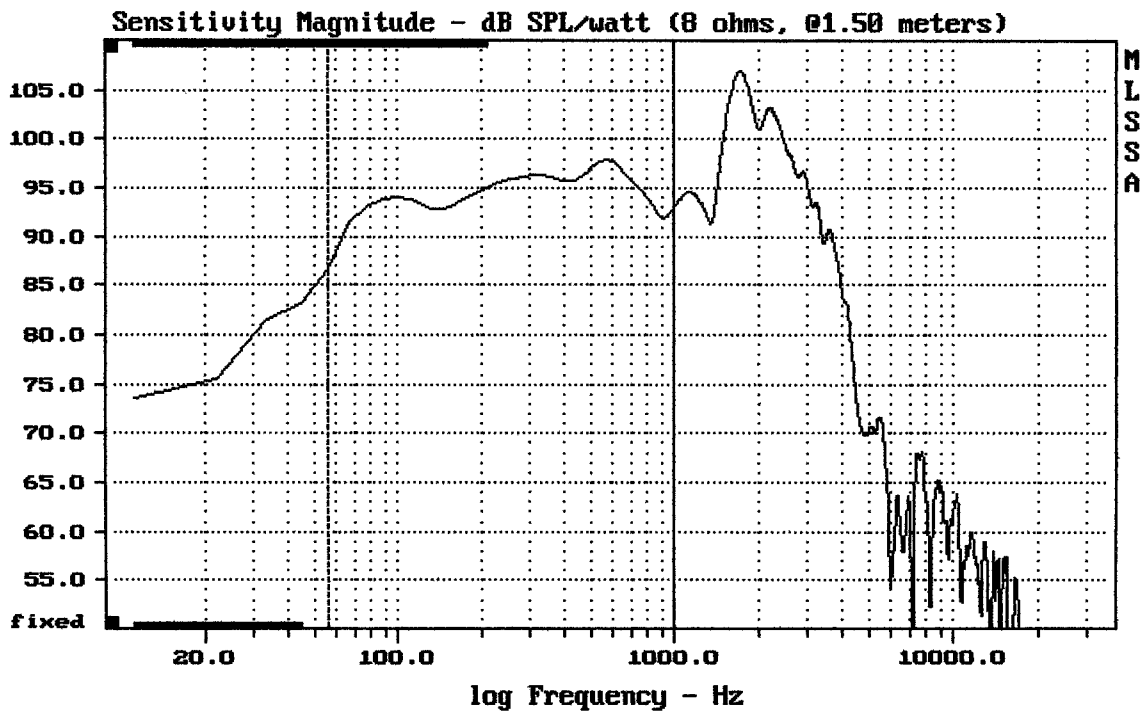

Level (55:999 Hz) = 94.73 dB SPL/watt (8 ohms, @1.50 meters)

EMINENCE KAPPA 18

MLSSA: Frequency Domain

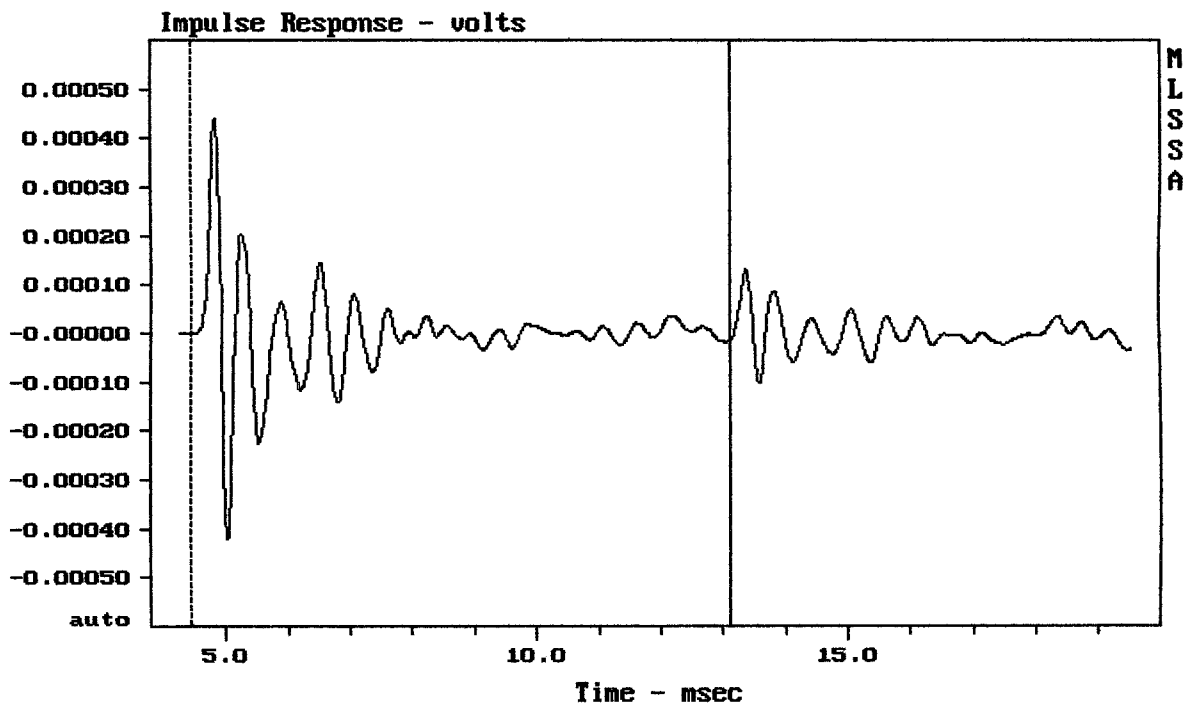

mean: -1.029e-006, rms: 8.942e-005, std: 8.941e-005, max: 0.0004403, min: -0.0

EMINENCE KAPPA 18