

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.50	Ohms
2	Fs	48.51	Hz
3	Re	4.68	Ohms[dc]
4	Res	93.05	Ohms
5	Qms	6.11	
6	Qes	0.31	
7	Qts	0.29	
8	L1	1.05	mH
9	L2	2.59	mH
10	R2	10.00	Ohms
11	RMSE-load	0.95	Ohms
12	Vas(Sd)	125.60	liters
13	Mms	99.21	grams
14	Cms	108	$\mu\text{M}/\text{Newton}$
15	B1	21.46	Tesla-M
16	SPLref(Sd)	98.5	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (80.00 grams)

Area (Sd): 907.92 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -23.2% (-20% to -50% is recommended).


RCF LF15G400

MLSSA: Parameters

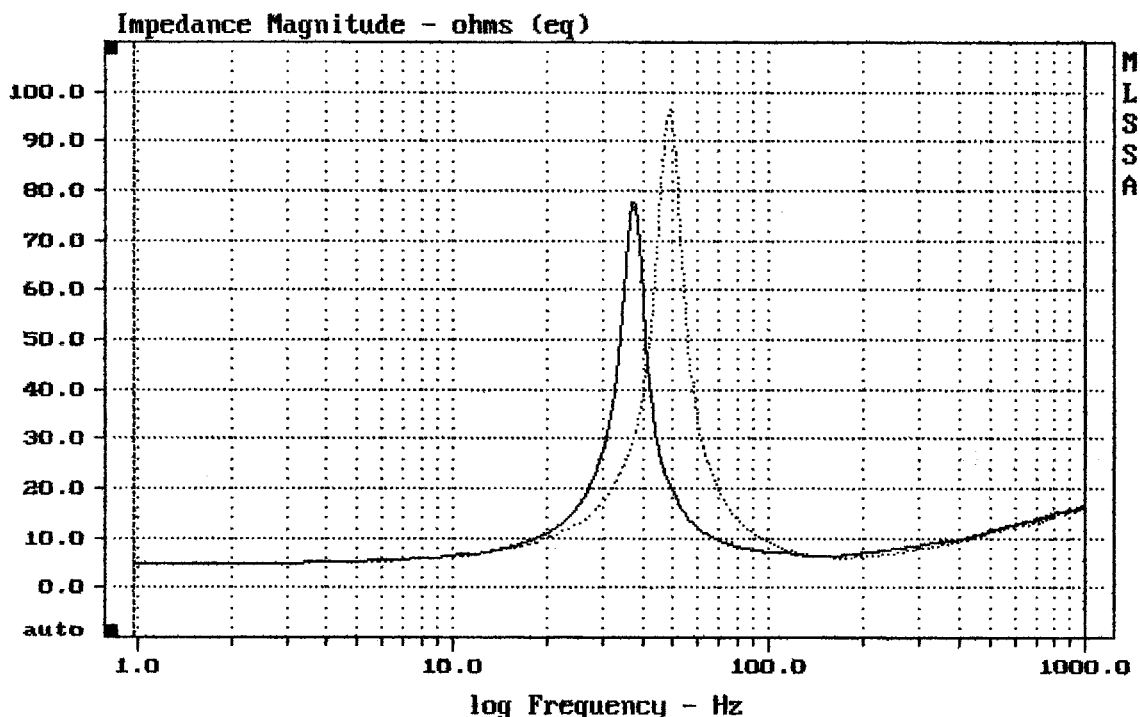

CURSOR: $dy = -0.41289$ $x = 1000.9766 (1025)$


MLSSA: Frequency Domain

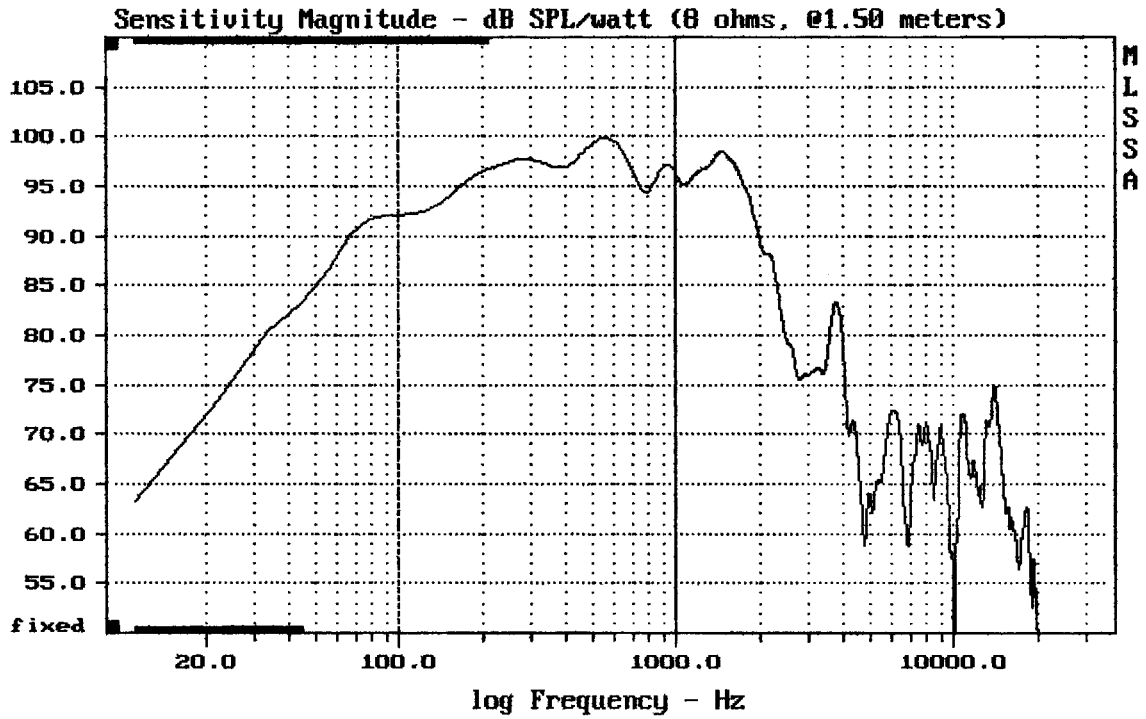

Level (100:999 Hz) = 96.74 dB SPL/watt (8 ohms, @1.50 meters)

LF15G400

MLSSA: Frequency Domain

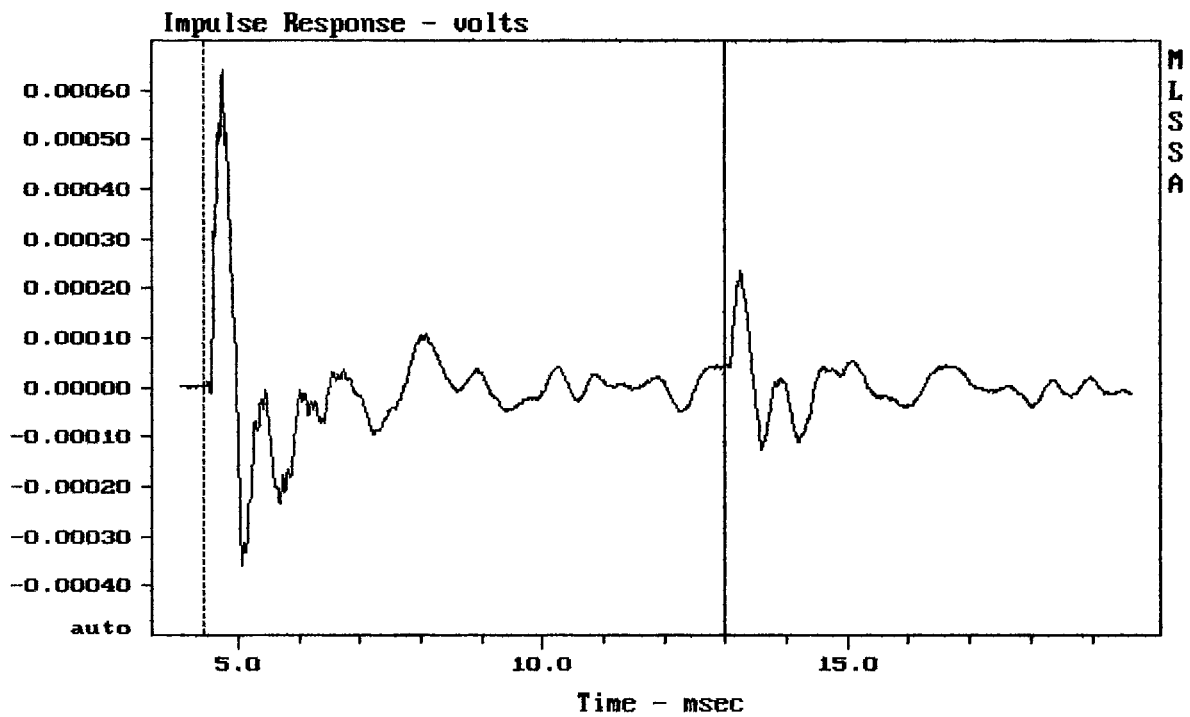

CURSOR: y = 4.1186e-005 x = 12.9910 (1181)

LF15G400