

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.86	Ohms
2	Fs	46.40	Hz
3	Re	4.75	Ohms[dc]
4	Res	117.60	Ohms
5	Qms	7.67	
6	Qes	0.31	
7	Qts	0.30	
8	L1	0.87	mH
9	L2	2.25	mH
10	R2	8.45	Ohms
11	RMSE-load	0.85	Ohms
12	Vas(Sd)	119.44	liters
13	Mms	114.04	grams
14	Cms	103	$\mu\text{M}/\text{Newton}$
15	B1	22.57	Tesla-M
16	SPLref(Sd)	97.7	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 907.92 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -21.5% (-20% to -50% is recommended).

RCF PRECISION LF15X400


MLSSA: Parameters

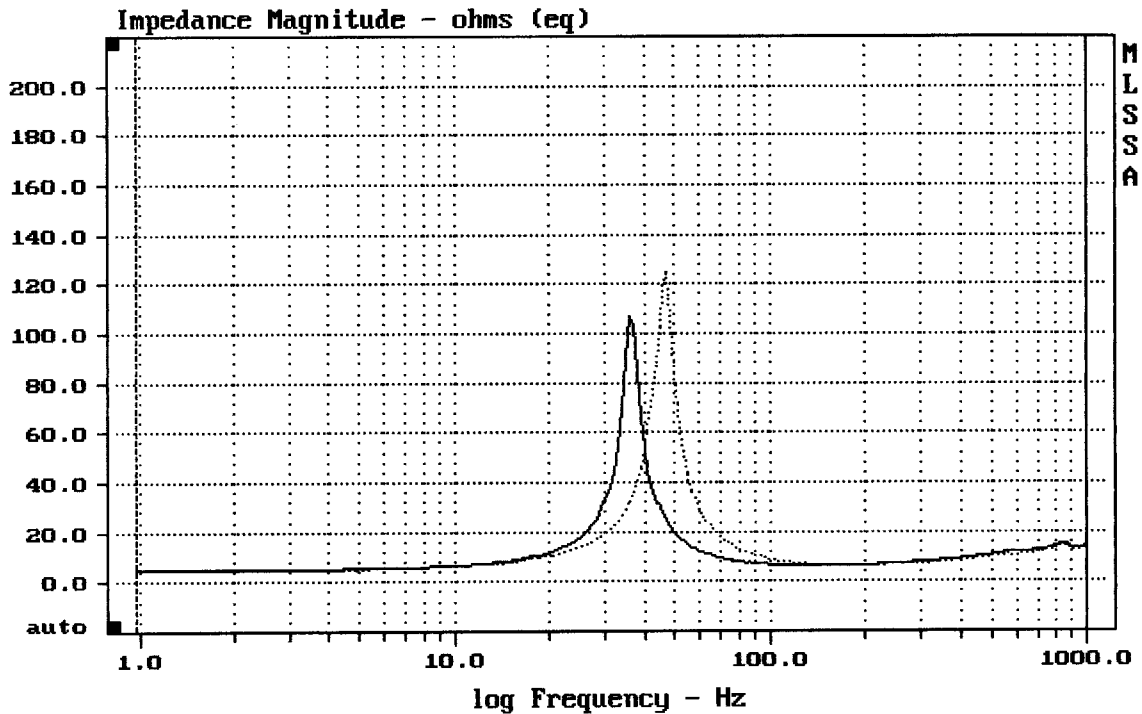

CURSOR: dy = -0.347136 x = 1000.9766 (1025)

DTTO


MLSSA: Frequency Domain

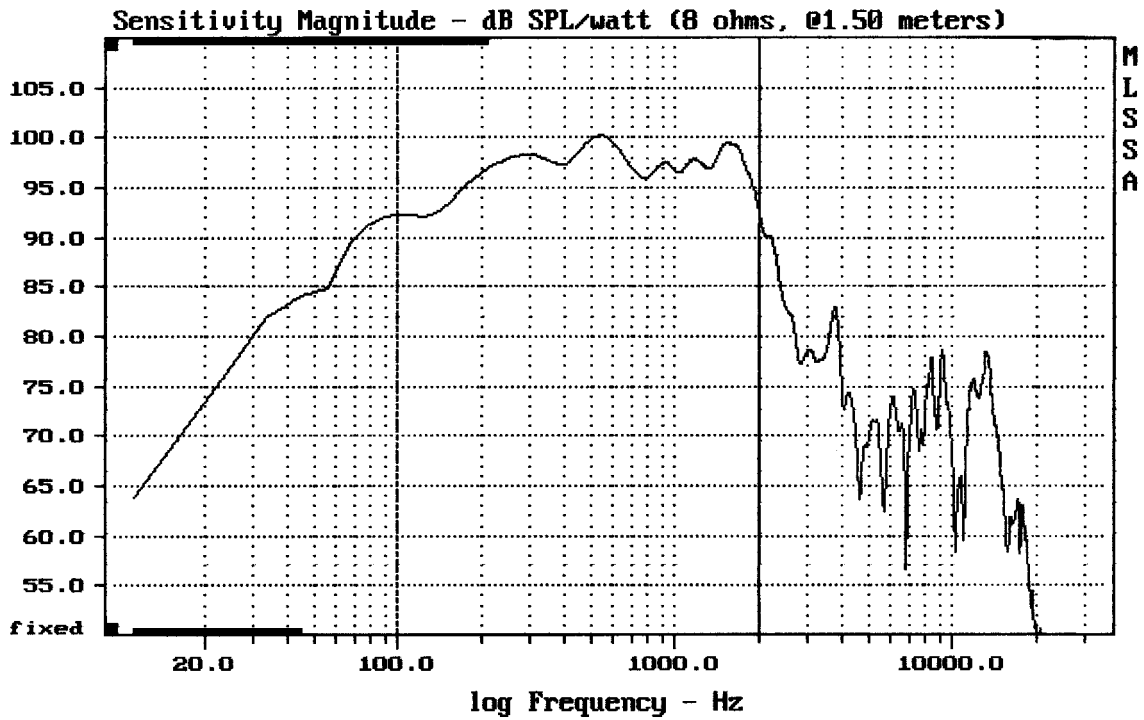

Level (100:1998 Hz) = 97.22 dB SPL/watt (8 ohms, @1.50 meters)

RCF PRECISION LF15X400

MLSSA: Frequency Domain

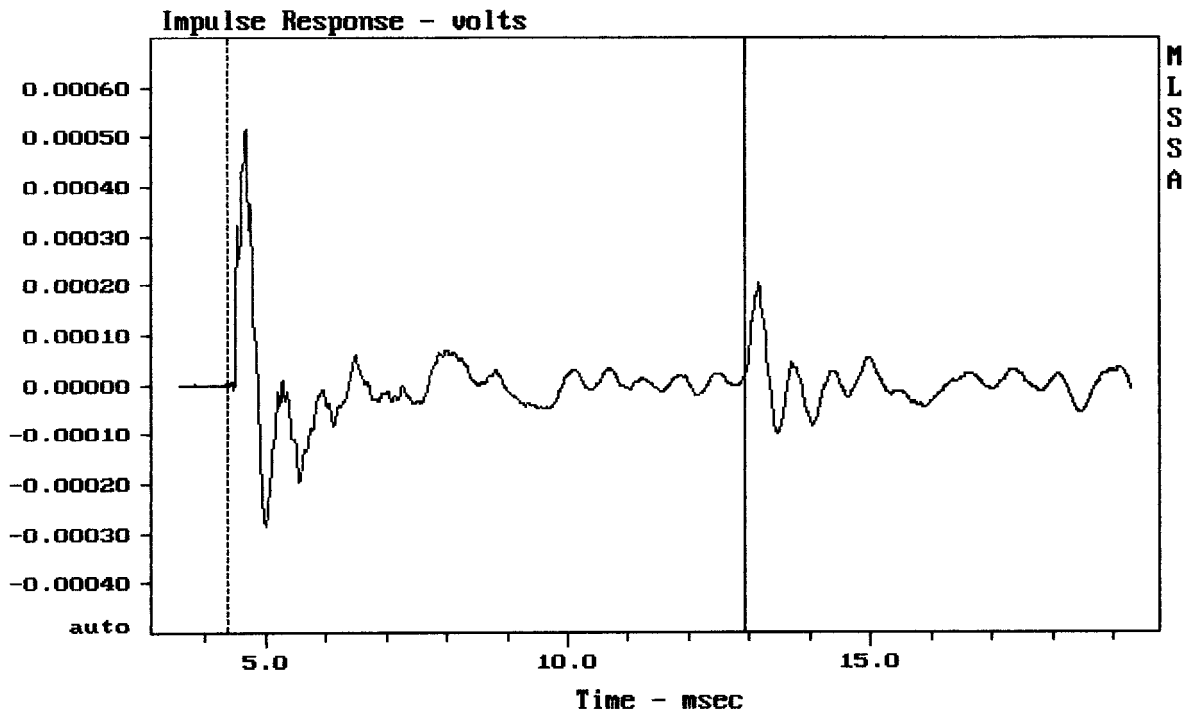

mean: -1.291e-006, rms: 8.715e-005, std: 8.714e-005, max: 0.0005158, min: -0.0

RCF PRECISION LF15X400