

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.63	Ohms
2	Fs	39.73	Hz
3	Re	4.85	Ohms[dc]
4	Res	126.48	Ohms
5	Qms	10.06	
6	Qes	0.39	
7	Qts	0.37	
8	L1	1.29	mH
9	L2	2.24	mH
10	R2	8.01	Ohms
11	RMSE-load	0.89	Ohms
12	Vas(Sd)	204.77	liters
13	Mms	173.86	grams
14	Cms	92	$\mu\text{M}/\text{Newton}$
15	B1	23.36	Tesla-M
16	SPLref(Sd)	97.0	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (140.00 grams)

Area (Sd): 1256.64 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED


Analysis successful. Shift in Fs = -27.3% (-20% to -50% is recommended).

RCF LF18G400

MLSSA: Parameters

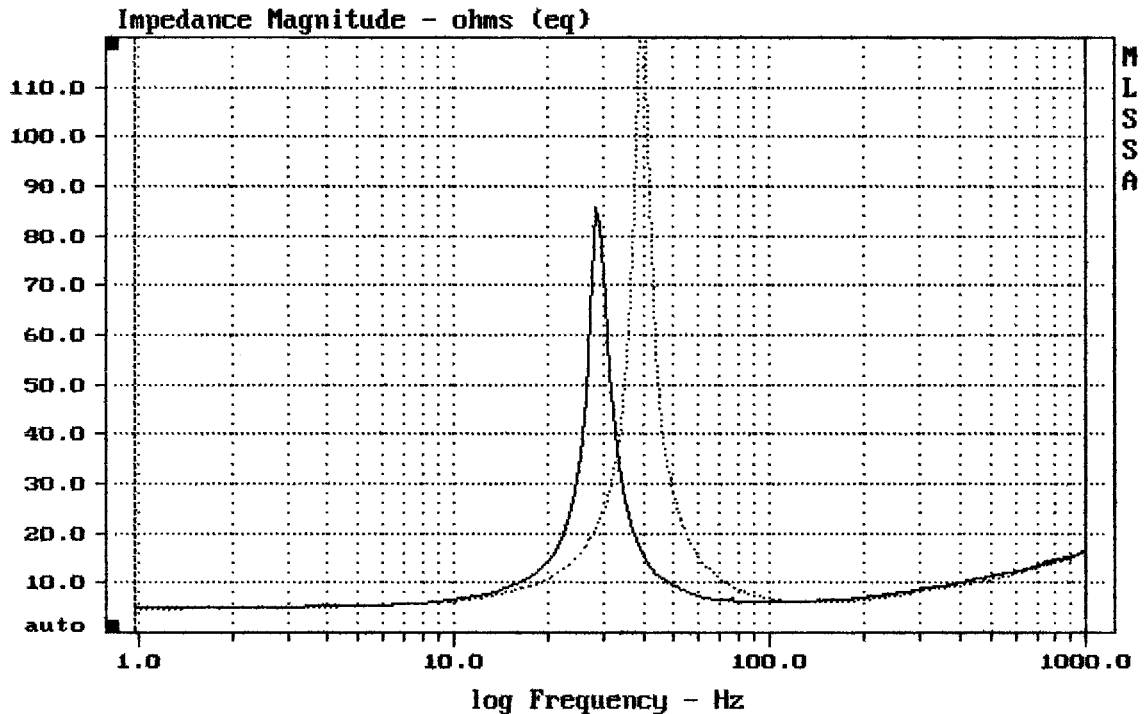


MLSSA: Frequency Domain

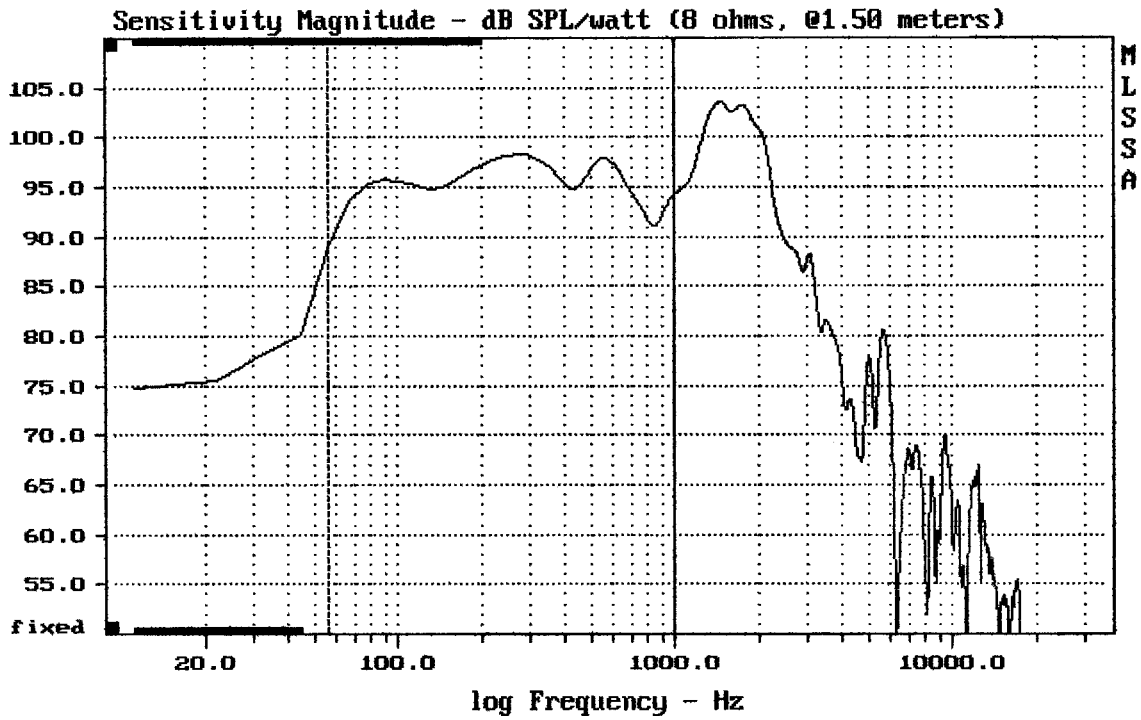

Level (55:999 Hz) = 95.80 dB SPL/watt (8 ohms, @1.50 meters)

LF18G400

MLSSA: Frequency Domain

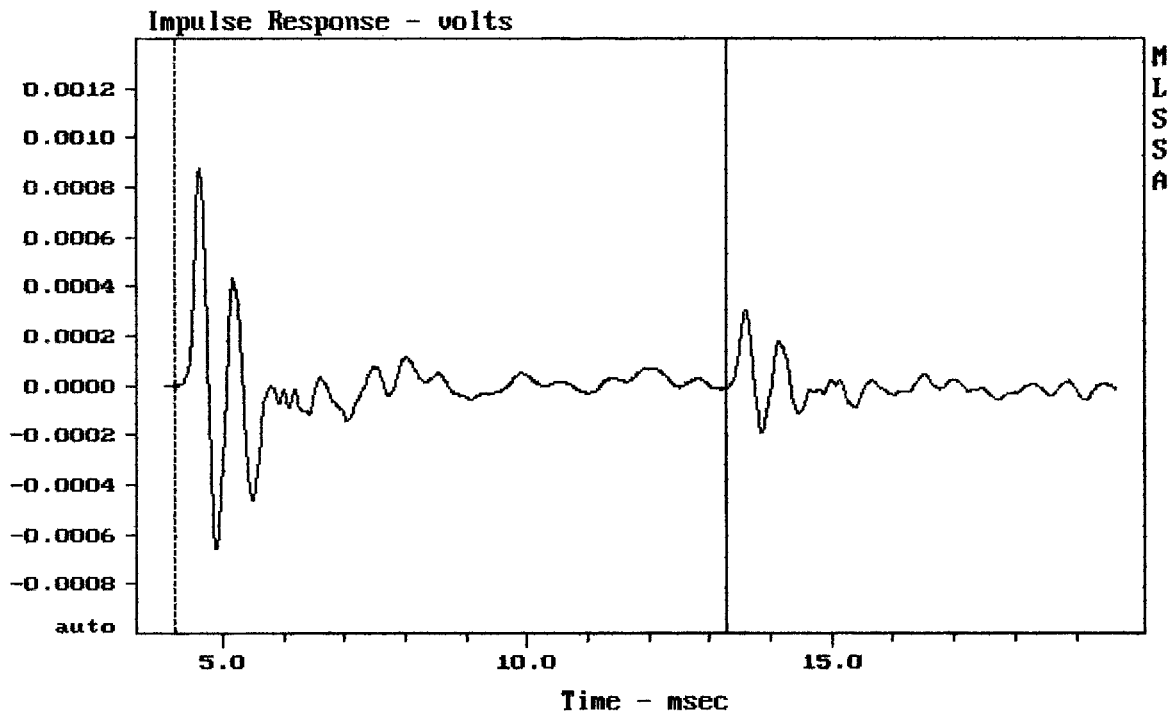

CURSOR: y = -1.11326e-005 x = 13.2800 (1200)

LF18G400