

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.65	Ohms
2	Fs	37.16	Hz
3	Re	4.97	Ohms[dc]
4	Res	111.02	Ohms
5	Qms	7.24	
6	Qes	0.32	
7	Qts	0.31	
8	L1	1.20	mH
9	L2	2.24	mH
10	R2	6.94	Ohms
11	RMSE-load	0.97	Ohms
12	Vas(Sd)	251.65	liters
13	Mms	161.64	grams
14	Cms	113	$\mu\text{M}/\text{Newton}$
15	Bl	24.05	Tesla-M
16	SPLref(Sd)	97.8	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (140.00 grams)

Area (Sd): 1256.64 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -26.6% (-20% to -50% is recommended).


RCF LF18X400

MLSSA: Parameters

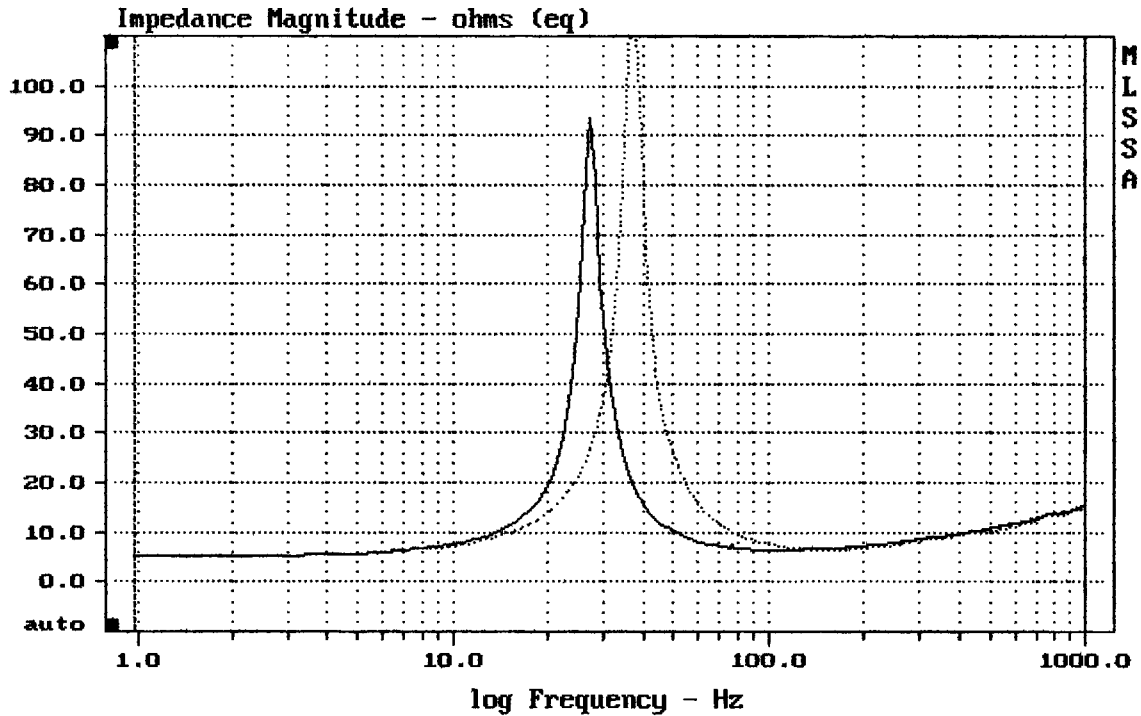

CURSOR: dy = -0.320918 x = 1000.9766 (1025)

MLSSA: Frequency Domain

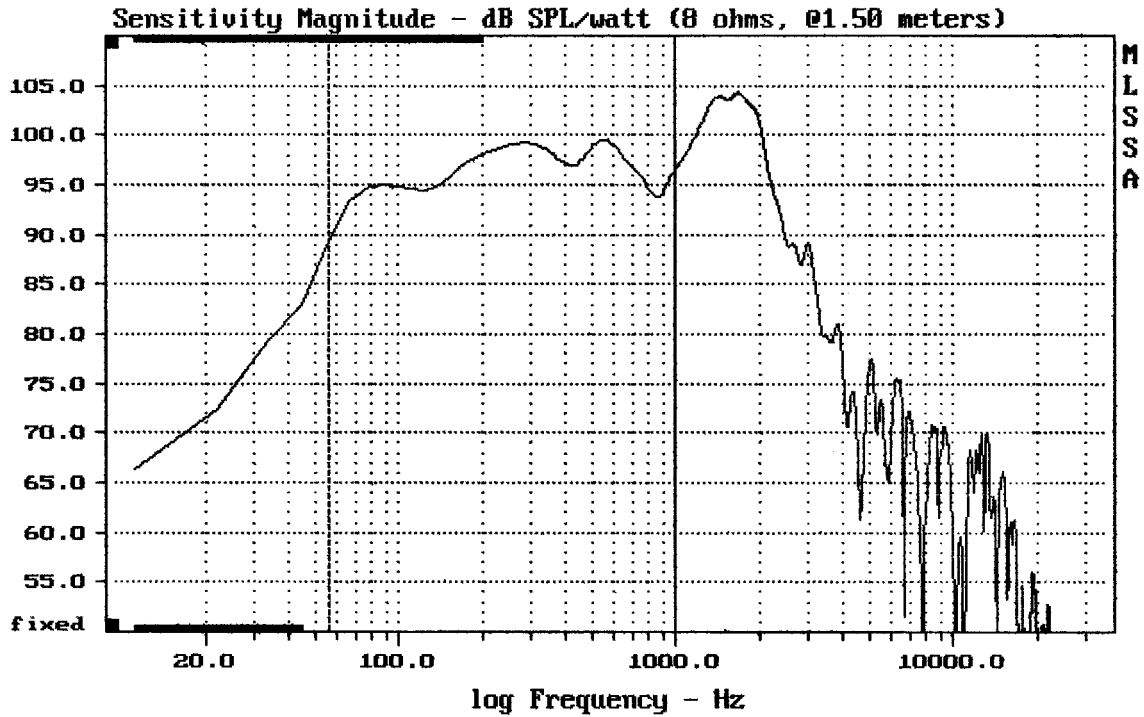



---

Level (55:999 Hz) = 96.78 dB SPL/watt (8 ohms, @1.50 meters)

---

LF18X400

MLSSA: Frequency Domain

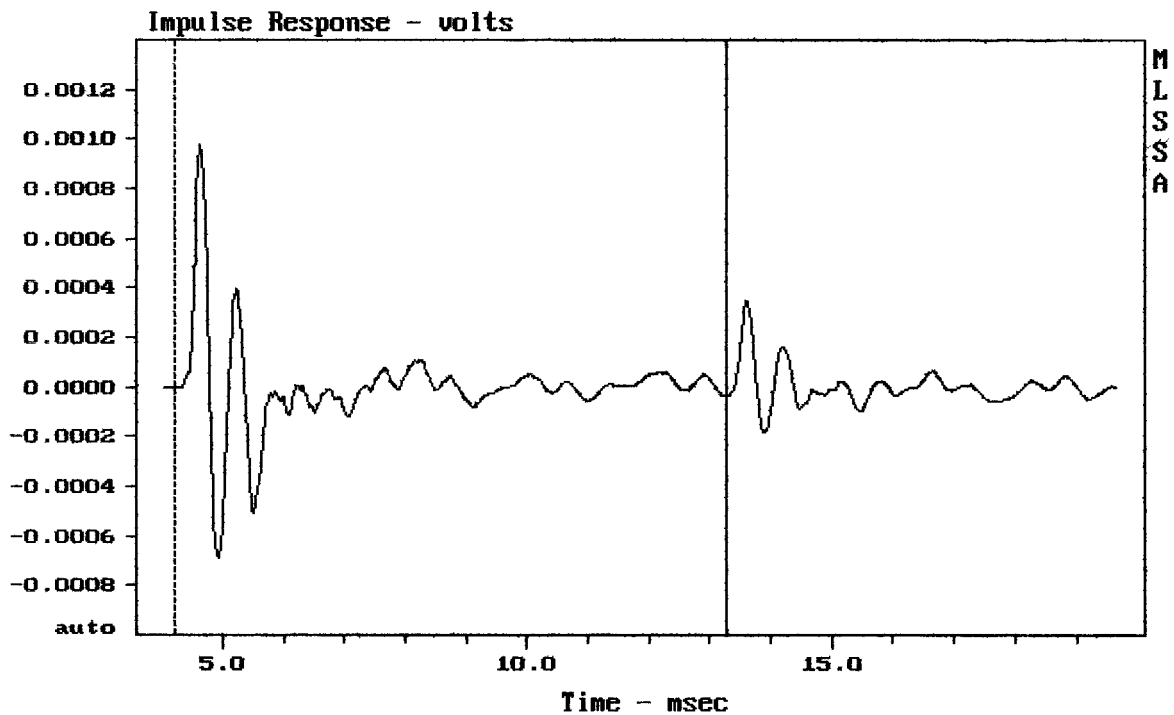


---

CURSOR:  $y = -3.61214e-005$   $x = 13.2880$  (1200)

---

LF18X400