

Line	Parameter	Value	Units
1	RMSE-free	0.45	Ohms
2	Fs	56.28	Hz
3	Re	6.20	Ohms [dc]
4	Res	95.07	Ohms
5	Qms	5.51	
6	Qes	0.36	
7	Qts	0.34	
8	L1	0.82	mH
9	L2	1.57	mH
10	R2	6.41	Ohms
11	RMSE-load	0.87	Ohms
12	Vas (Sd)	60.89	liters
13	Mms	52.00	grams
14	Cms	154	$\mu\text{M}/\text{Newton}$
15	B1	17.81	Tesla-M
16	SPLref (Sd)	96.6	dB [Re]
17	Rub-index	0.01	

Method: Mass-loaded (40.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -23.1% (-20% to -50% is recommended).


P.D.912

MLSSA: Parameters

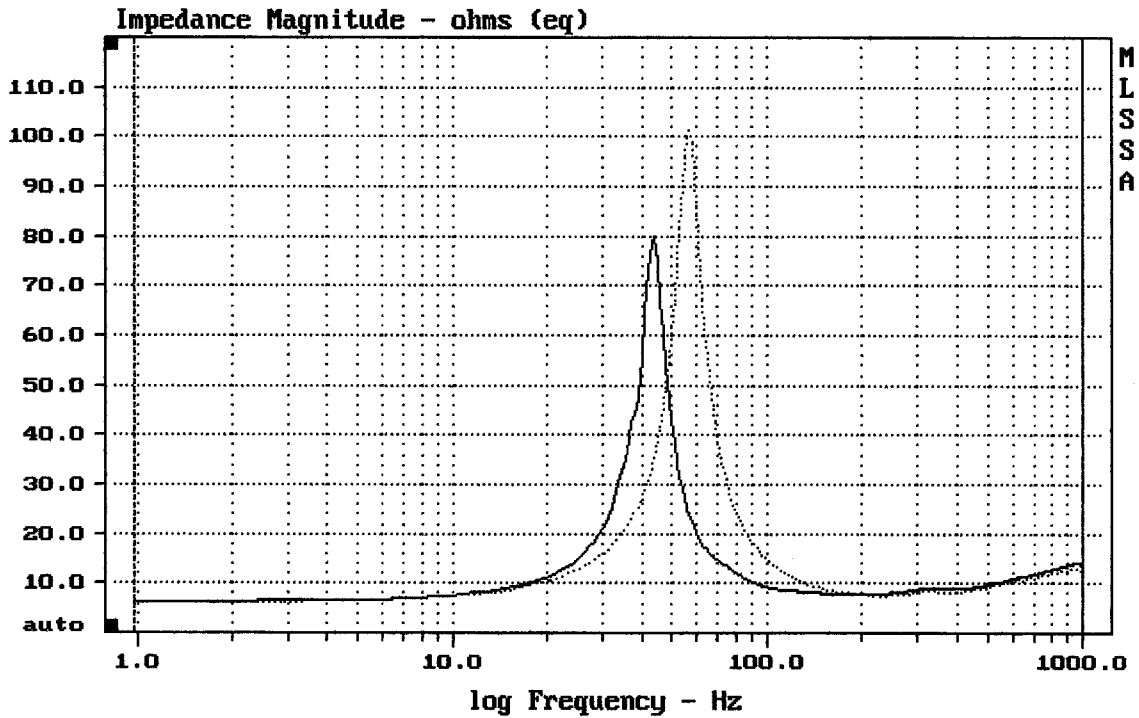

CURSOR: dy = -0.954556 x = 1000.9766 (1025)

MLSSA: Frequency Domain

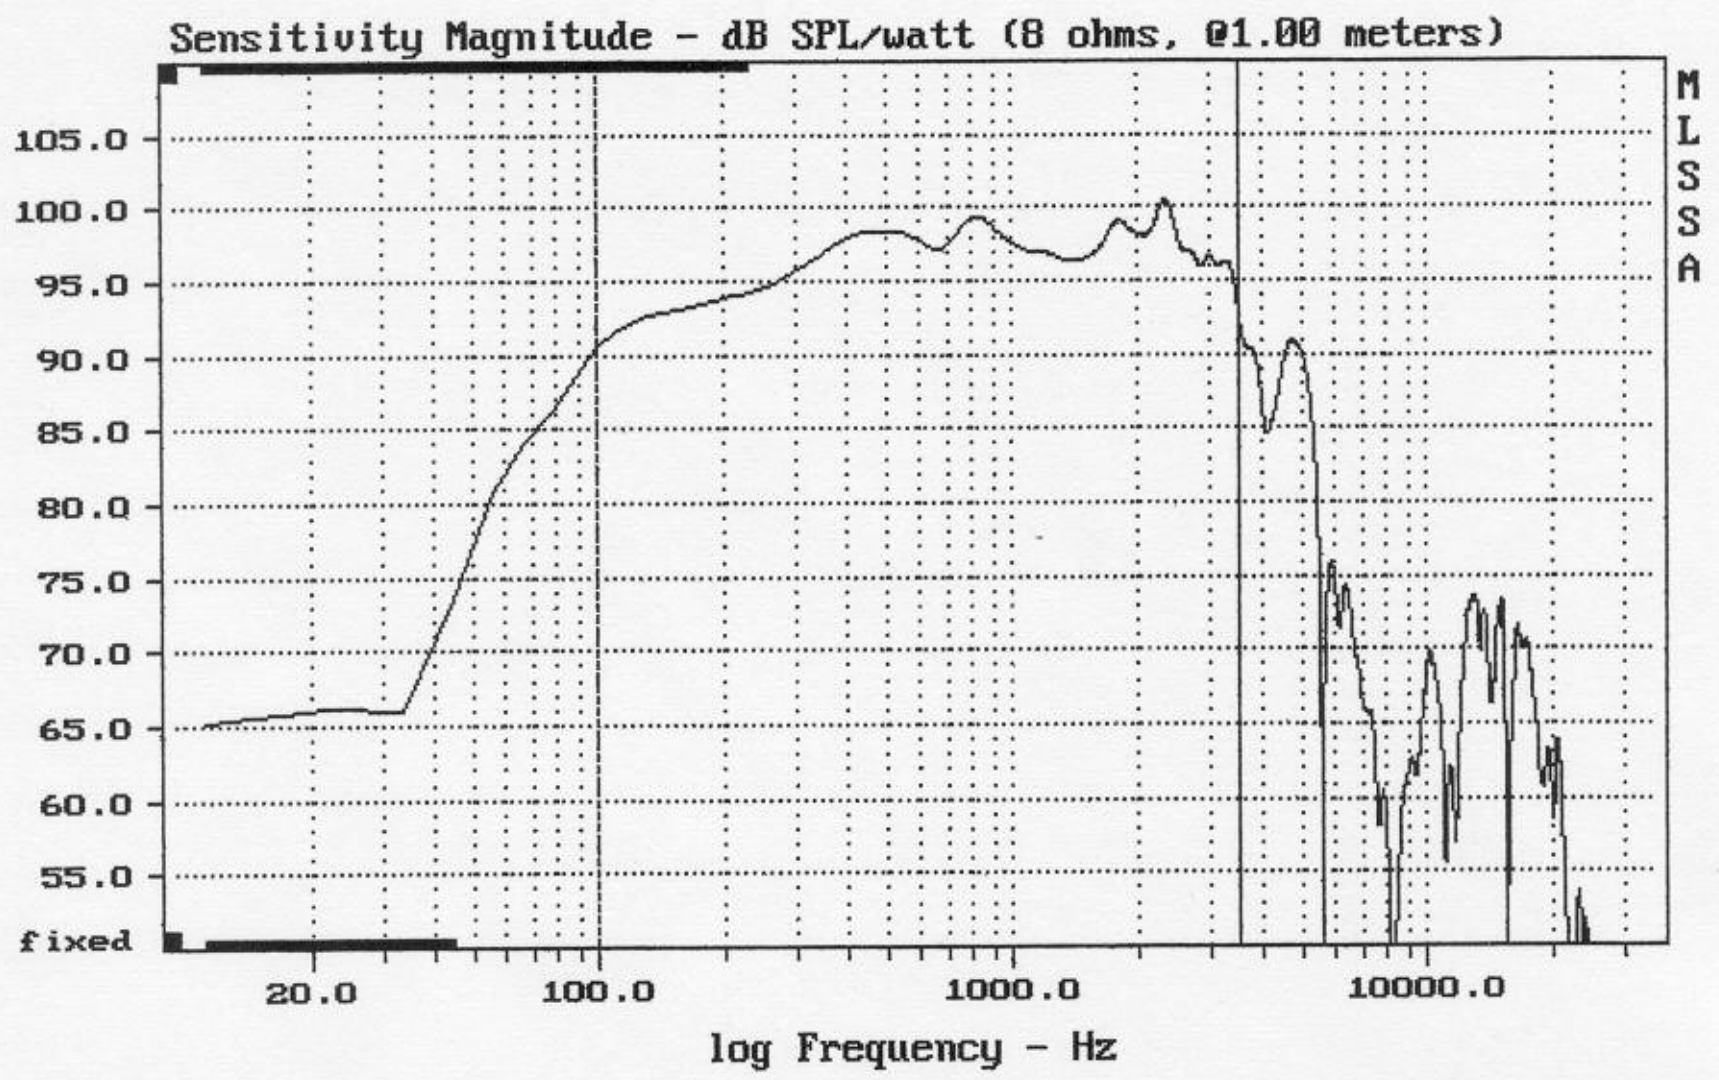

Level (100:3507 Hz) = 96.75 dB SPL/watt (8 ohms, @1.00 meters)
