

## MLSSA SPO 4.0D #960903-3057-3075

## Measured Data

## QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.79	Ohms
2	Fs	40.93	Hz
3	Re	6.40	Ohms[dc]
4	Res	100.40	Ohms
5	Qms	6.03	
6	Qes	0.38	
7	Qts	0.36	
8	L1	0.92	mH
9	L2	1.50	mH
10	R2	7.10	Ohms
11	RMSE-load	1.06	Ohms
12	Vas(Sd)	197.85	liters
13	Mms	73.86	grams
14	Cms	205	$\mu\text{M}/\text{Newton}$
15	B1	17.78	Tesla-M
16	SPLref(Sd)	97.3	dB[Re]
17	Rub-index	0.01	


Method: Mass-loaded (60.00 grams)

Area (Sd): 829.58 sq cm

DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -24.9% (-20% to -50% is recommended).

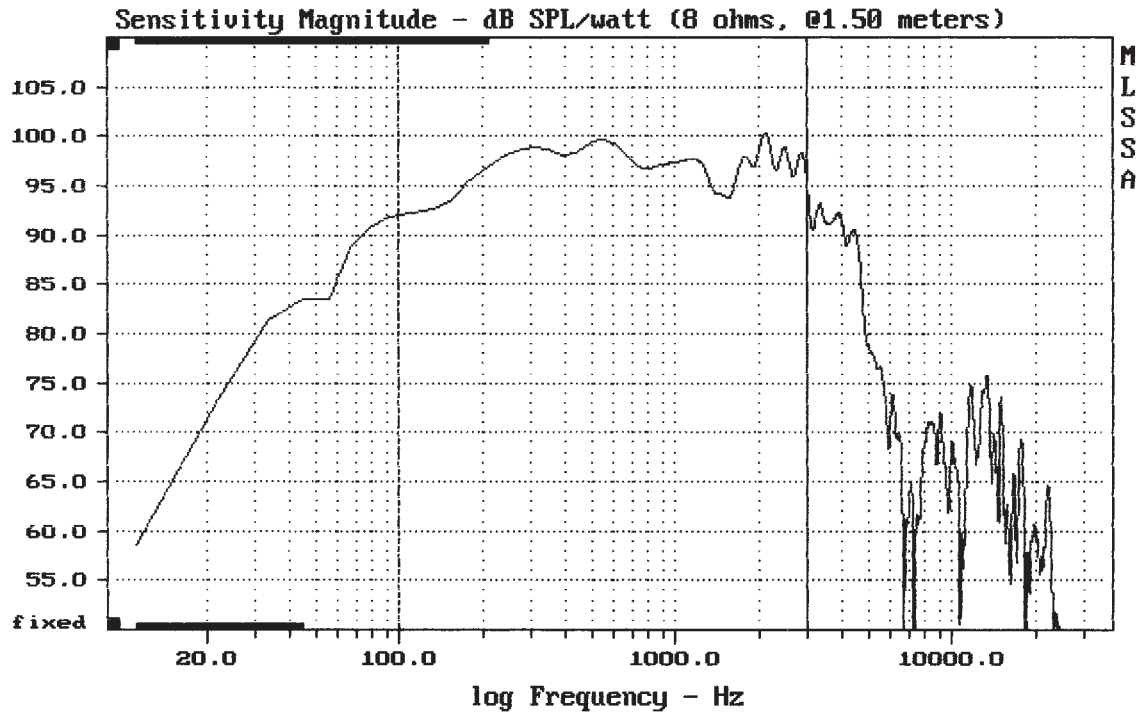


---


Level (100:3007 Hz) = 97.24 dB SPL/watt (8 ohms, @1.50 meters)

---

P.D. P15-300

11-28-81 8:56 PM

MLSSA: Frequency Domain

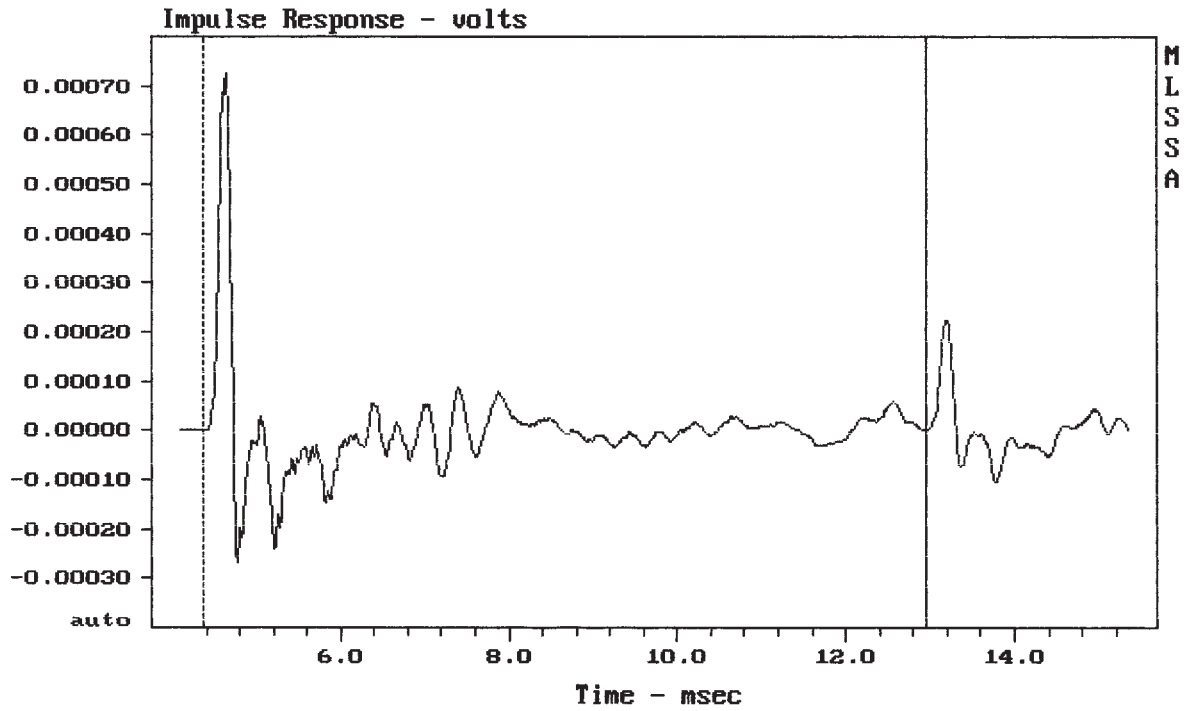


---

CURSOR: y = 1.21301e-006 x = 12.9580 (1178)

---

P.D. P15-300