


Level (100:3851 Hz) = 98.30 dB SPL/watt (8 ohms, @1.50 meters)

SELENIUM QS15P30

MLSSA: Frequency Domain

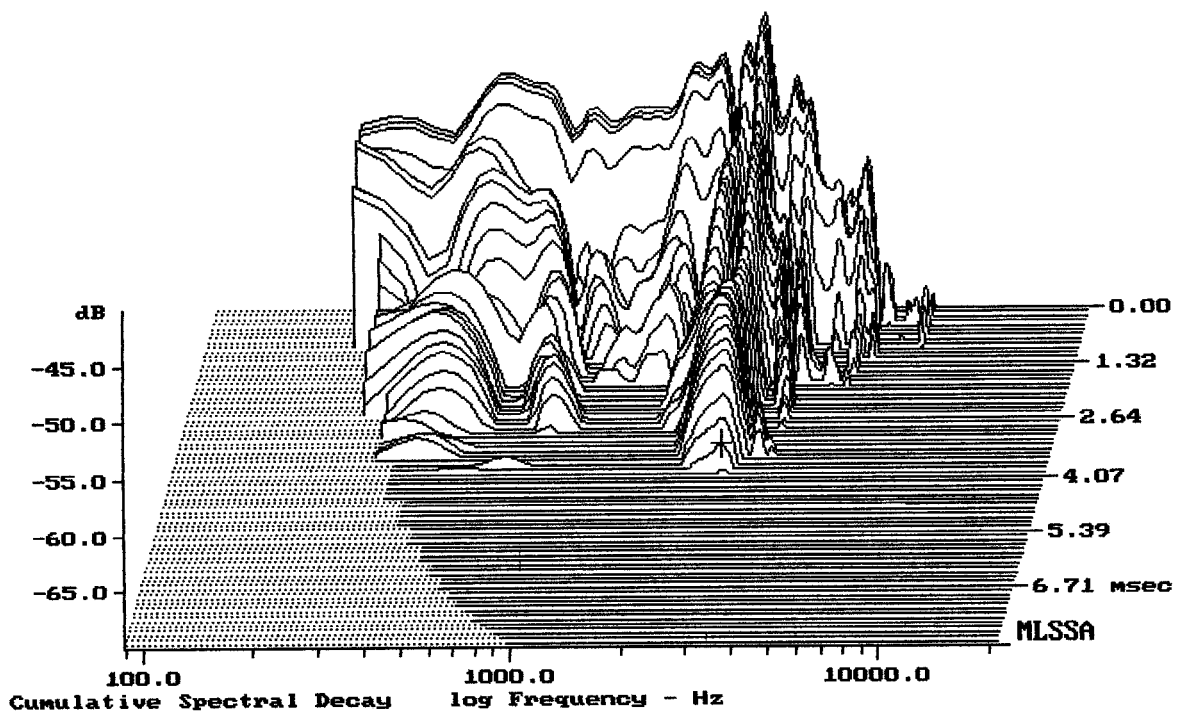

-67.80 dB, 2752 Hz (62), 3.850 msec (36)

Line	Parameter	Value	Units
1	RMSE-free	0.35	Ohms
2	Fs	75.23	Hz
3	Re	5.36	Ohms[dc]
4	Res	40.56	Ohms
5	Qms	14.61	
6	Qes	1.93	
7	Qts	1.71	
8	L1	0.45	mH
9	L2	0.85	mH
10	R2	5.04	Ohms
11	RMSE-load	0.43	Ohms
12	Vas(Sd)	83.08	liters
13	Mms	52.07	grams
14	Cms	86	$\mu\text{M}/\text{Newton}$
15	Bl	8.27	Tesla-M
16	SPLref(Sd)	94.5	dB[Re]
17	Rub-index	0.02	

Method: Mass-loaded (80.00 grams)

Area (Sd): 829.58 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -36.3% (-20% to -50% is recommended).

QS15P30

MLSSA: Parameters

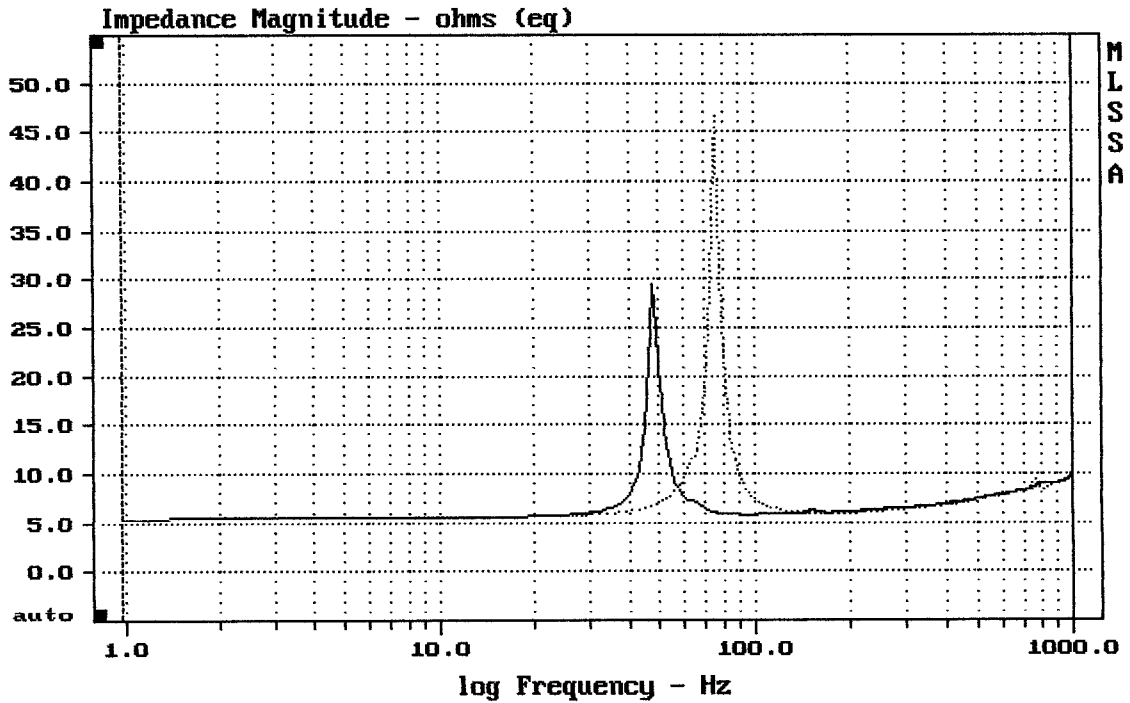

mean: 7.944, rms: 8.537, std: 3.126, max: 46.59, min: 5.398

MLSSA: Frequency Domain