

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.74	Ohms
2	Fs	65.57	Hz
3	Re	5.38	Ohms[dc]
4	Res	79.82	Ohms
5	Qms	3.99	
6	Qes	0.27	
7	Qts	0.25	
8	L1	0.77	mH
9	L2	2.00	mH
10	R2	3.19	Ohms
11	RMSE-load	1.05	Ohms
12	Vas(Sd)	42.42	liters
13	Mms	54.99	grams
14	Cms	107	$\mu\text{M}/\text{Newton}$
15	B1	21.29	Tesla-M
16	SPLref(Sd)	98.3	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -36.6% (-20% to -50% is recommended).


RCF L12L750

MLSSA: Parameters

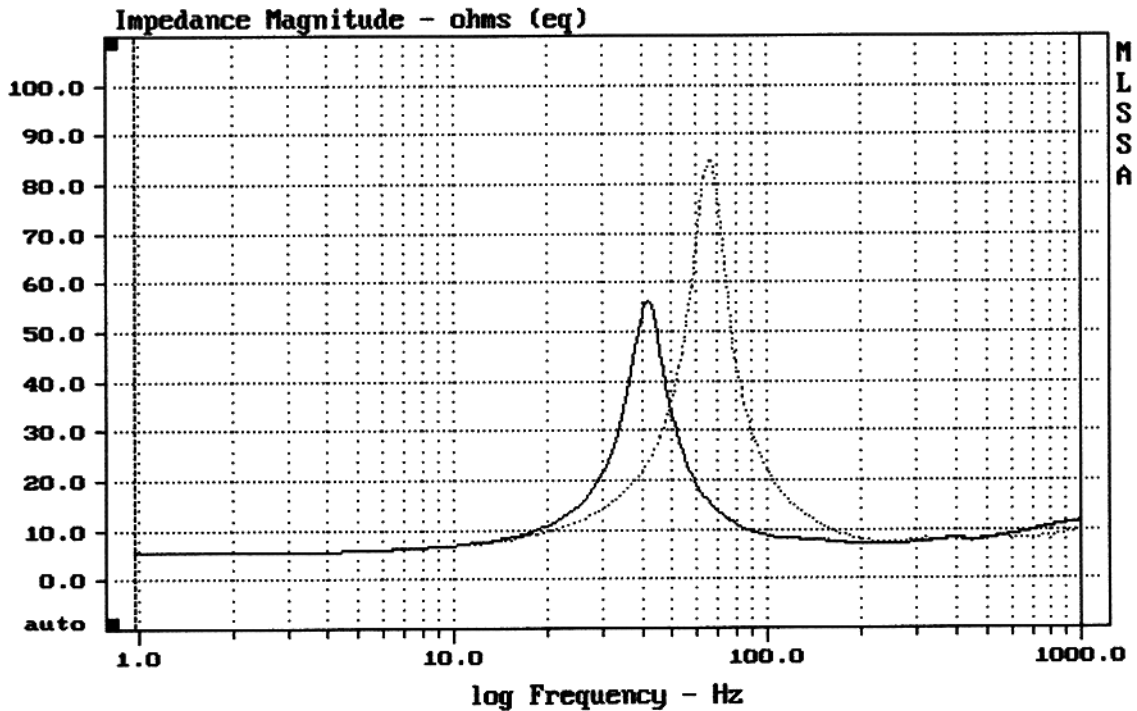

mean: 11.19, rms: 15.25, std: 10.36, max: 84.72, min: 5.47


MLSSA: Frequency Domain

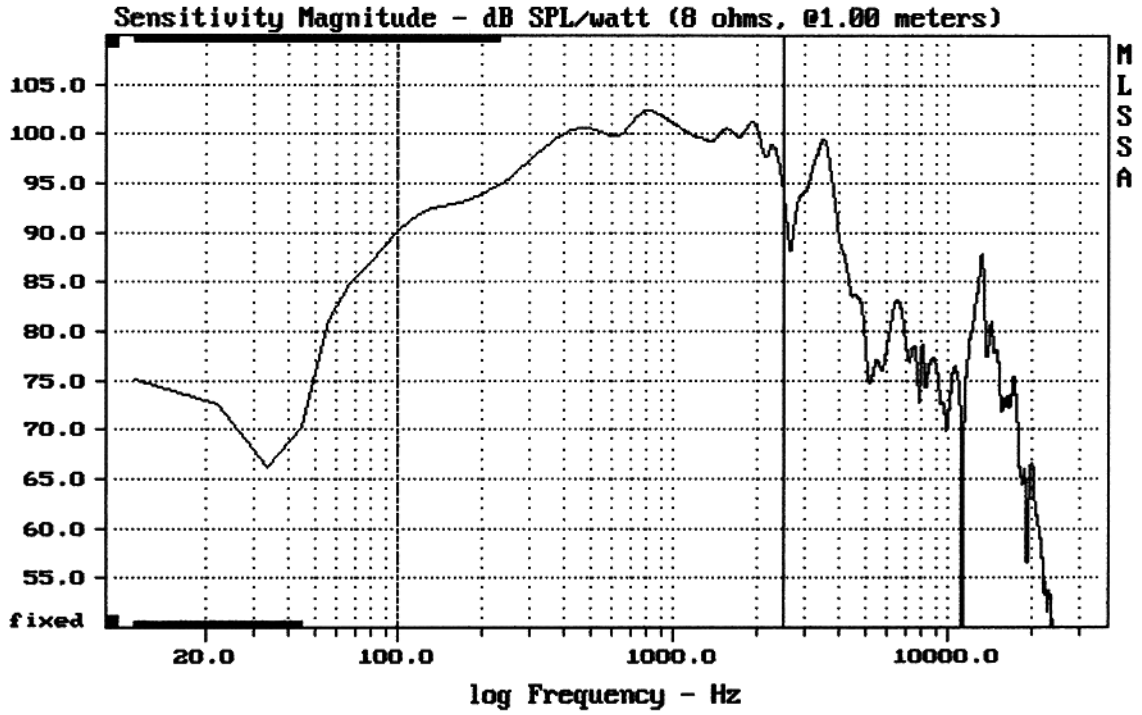

Level (100:2497 Hz) = 98.88 dB SPL/watt (16 ohms, @1.00 meters)

RCF L12L750

MLSSA: Frequency Domain

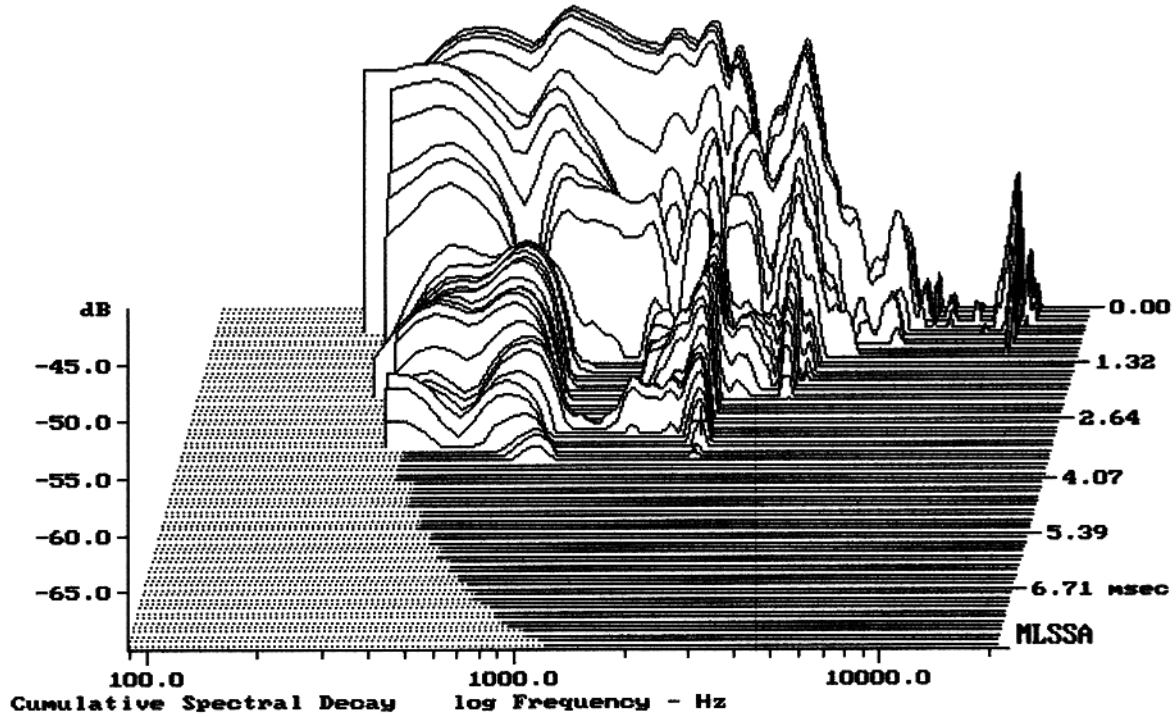

-67.79 dB, 2264 Hz (51), 3.300 msec (31)