

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.67	Ohms
2	Fs	61.25	Hz
3	Re	5.29	Ohms[dc]
4	Res	145.45	Ohms
5	Qms	9.53	
6	Qes	0.35	
7	Qts	0.33	
8	L1	0.75	mH
9	L2	1.90	mH
10	R2	8.41	Ohms
11	RMSE-load	1.30	Ohms
12	Vas(Sd)	42.49	liters
13	Mms	62.92	grams
14	Cms	107	$\mu\text{M}/\text{Newton}$
15	B1	19.23	Tesla-M
16	SPLref(Sd)	96.3	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -32.4% (-20% to -50% is recommended).


RCF L12P300

MLSSA: Parameters

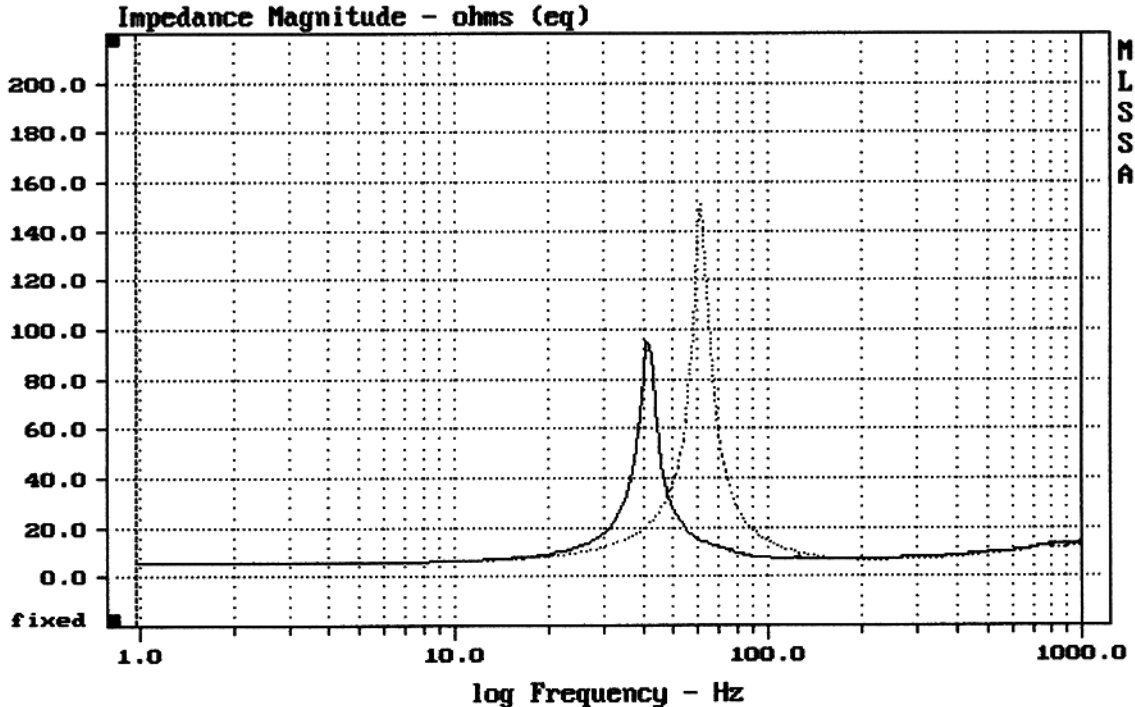

mean: 12.28, rms: 17.73, std: 12.79, max: 150.4, min: 5.336


MLSSA: Frequency Domain

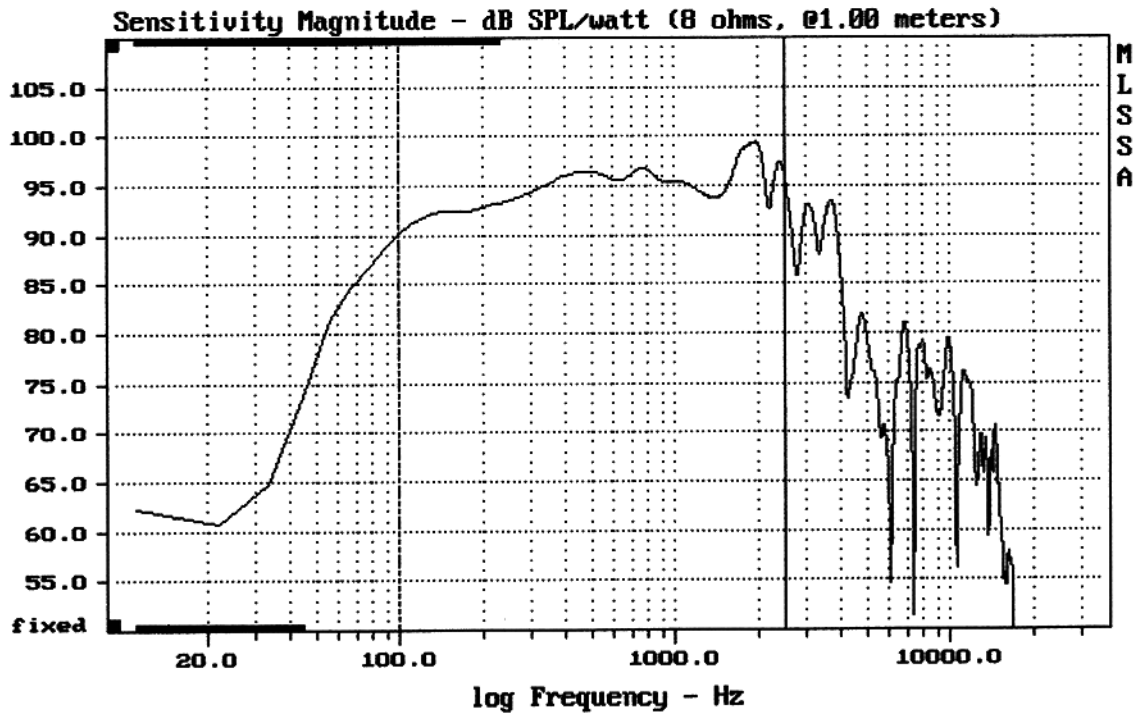

Level (100:2508 Hz) = 95.14 dB SPL/watt (8 ohms, @1.00 meters)

RCF L12P300

MLSSA: Frequency Domain

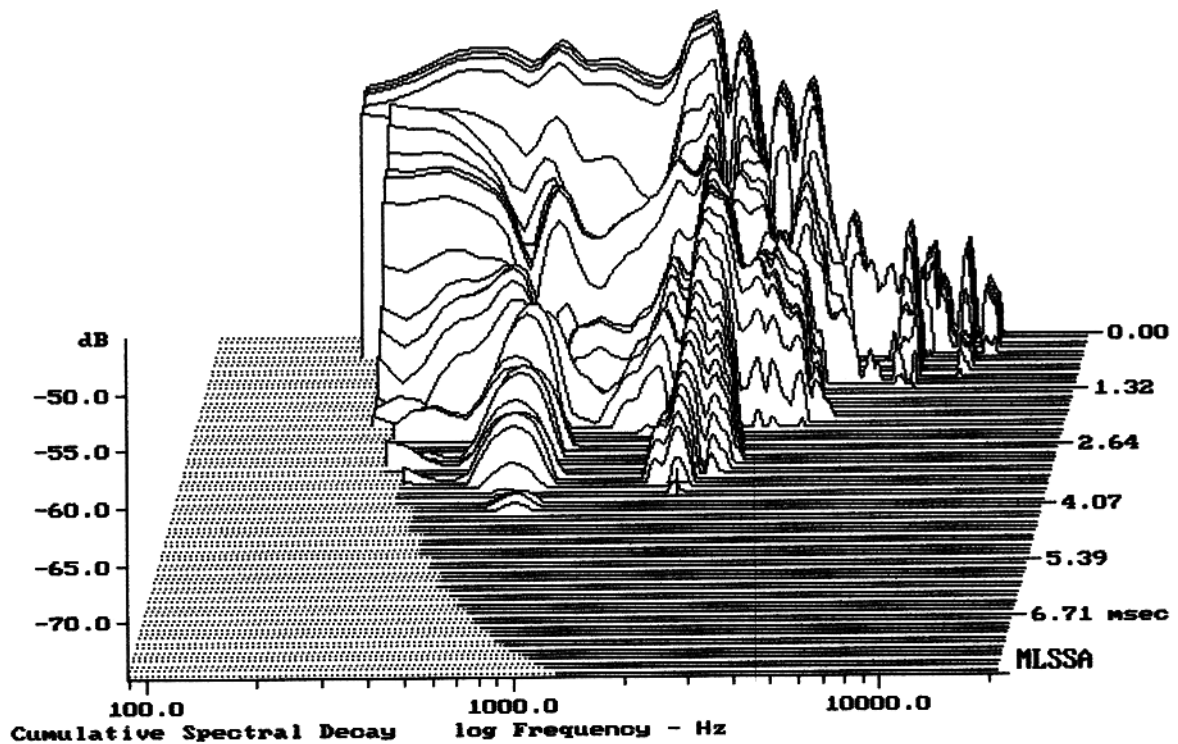

-74.19 dB, 2042 Hz (46), 3.740 msec (35)