

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.49	Ohms
2	Fs	80.18	Hz
3	Re	5.35	Ohms[dc]
4	Res	130.52	Ohms
5	Qms	11.07	
6	Qes	0.45	
7	Qts	0.44	
8	L1	1.06	mH
9	L2	1.77	mH
10	R2	6.16	Ohms
11	RMSE-load	1.06	Ohms
12	Vas(Sd)	23.98	liters
13	Mms	65.07	grams
14	Cms	61	$\mu\text{M}/\text{Newton}$
15	Bl	19.66	Tesla-M
16	SPLref(Sd)	96.2	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -32.2% (-20% to -50% is recommended).


RCF L12P540

MLSSA: Parameters

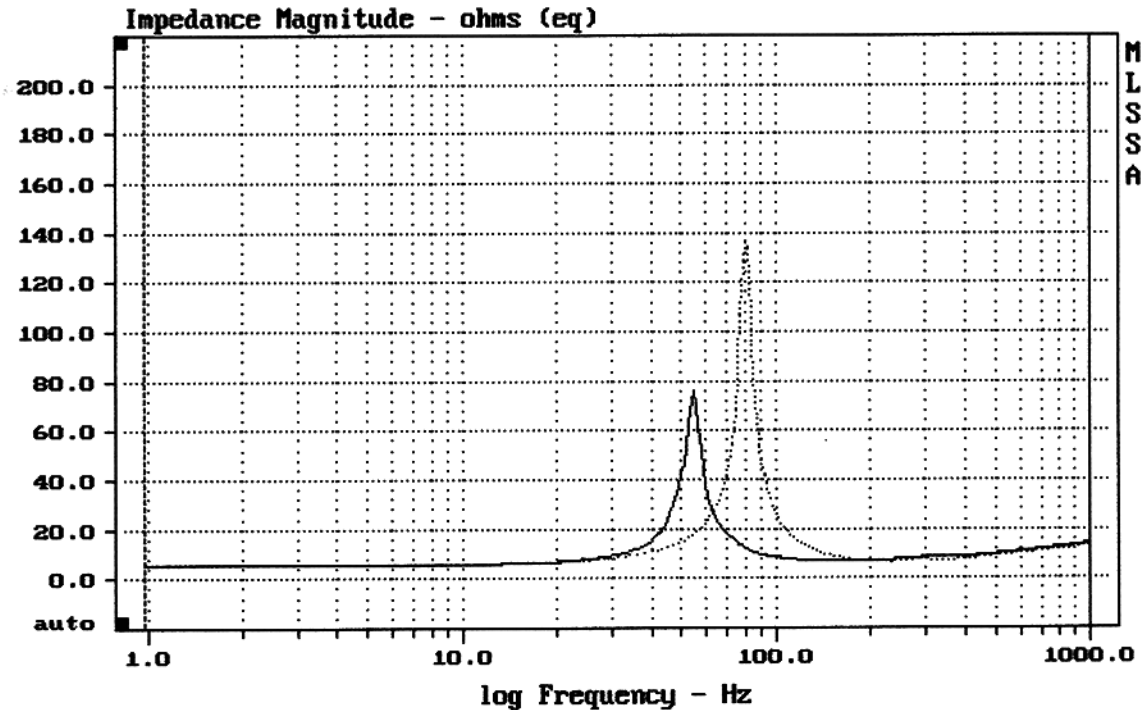

mean: 12.19, rms: 17.12, std: 12.02, max: 136.4, min: 5.397


MLSSA: Frequency Domain

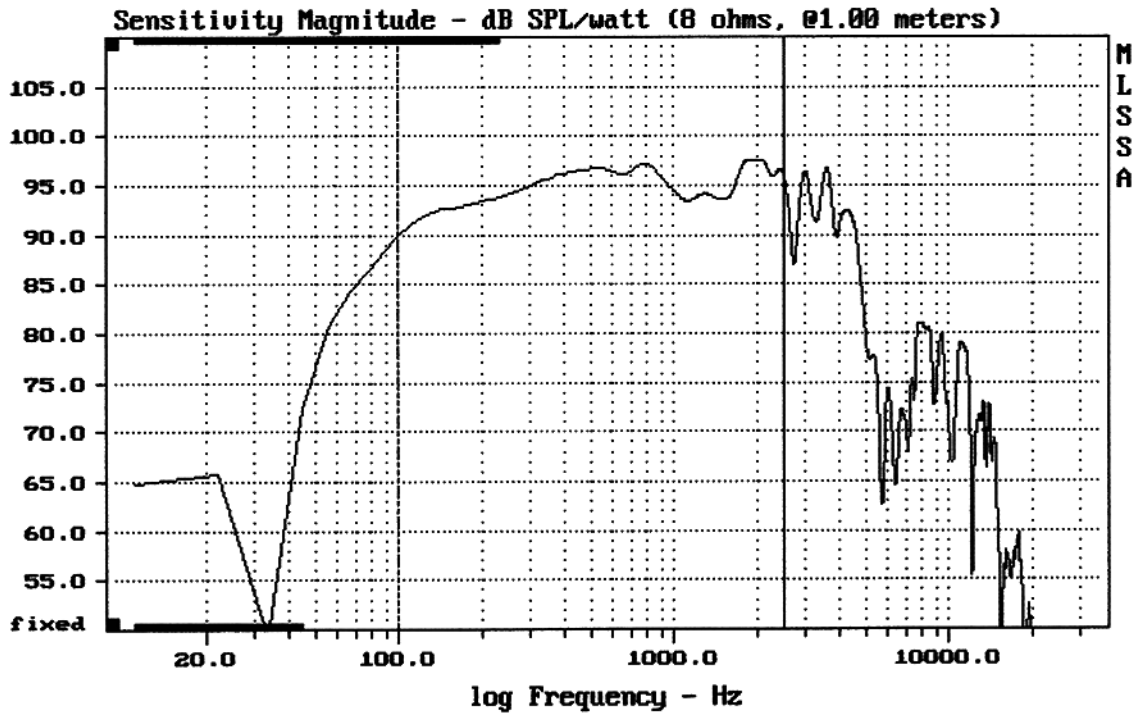

Level (100:2500 Hz) = 95.11 dB SPL/watt (8 ohms, @1.00 meters)

RCF L12P540

MLSSA: Frequency Domain

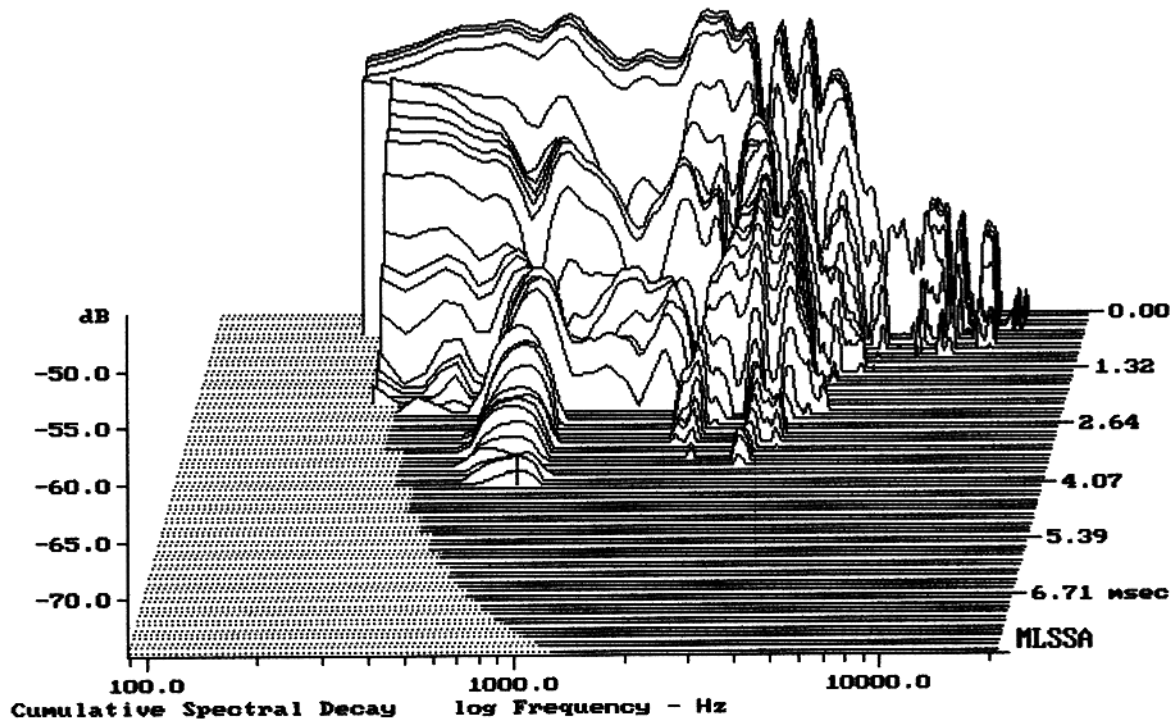

-73.85 dB, 755 Hz (17), 4.070 msec (38)