

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

| Line | Parameter | Value | Units |
|------|------------|--------|----------------|
| 1 | RMSE-free | 1.04 | Ohms |
| 2 | Fs | 52.54 | Hz |
| 3 | Re | 6.68 | Ohms[dc] |
| 4 | Res | 53.15 | Ohms |
| 5 | Qms | 4.47 | |
| 6 | Qes | 0.56 | |
| 7 | Qts | 0.50 | |
| 8 | L1 | 1.36 | mH |
| 9 | L2 | 2.15 | mH |
| 10 | R2 | 10.63 | Ohms |
| 11 | RMSE-load | 1.05 | Ohms |
| 12 | Vas(Sd) | 88.83 | liters |
| 13 | Mms | 106.14 | grams |
| 14 | Cms | 86 | μ M/Newton |
| 15 | Bl | 20.41 | Tesla-M |
| 16 | SPLref(Sd) | 95.4 | dB[Re] |
| 17 | Rub-index | 0.01 | |

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -23.4% (-20% to -50% is recommended).


RCF L15P-200/AK

MLSSA: Parameters

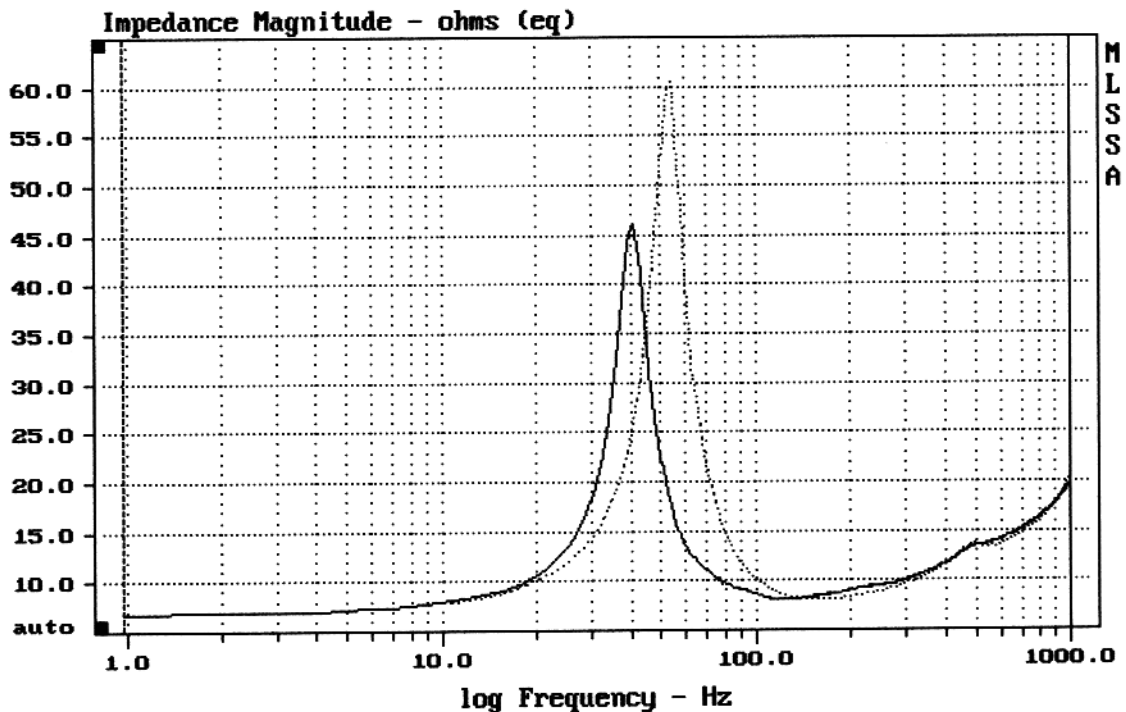

mean: 14.09, rms: 15.32, std: 6.03, max: 60.61, min: 6.738


MLSSA: Frequency Domain

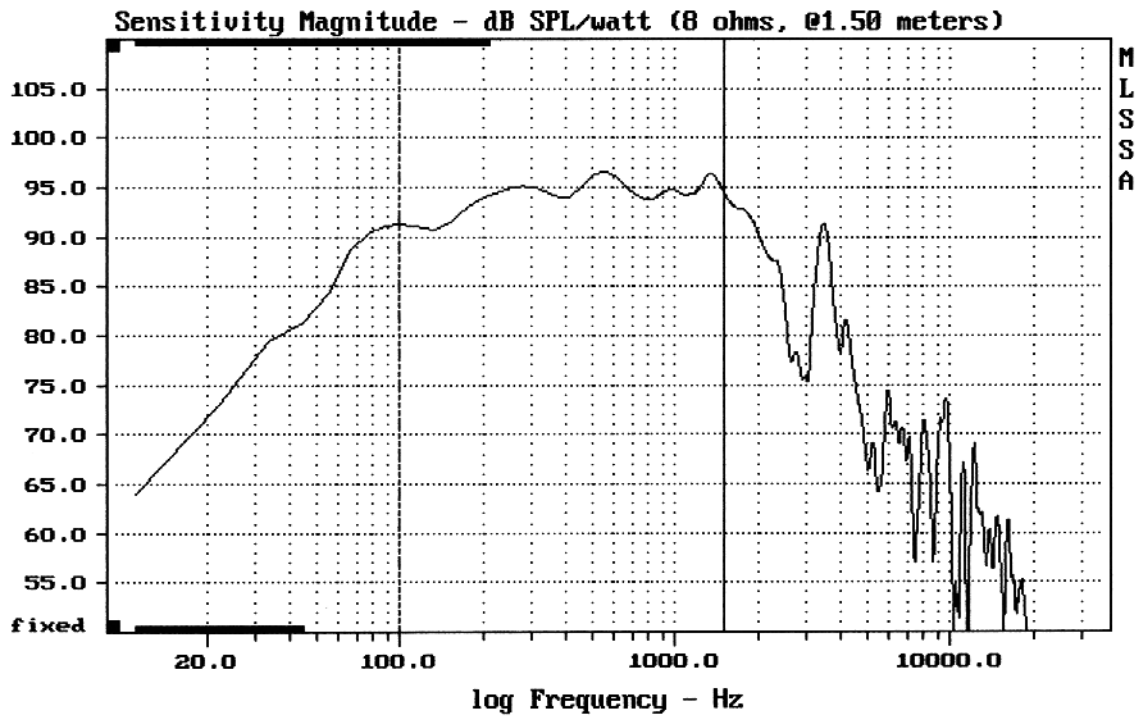

Level (100:1498 Hz) = 94.31 dB SPL/watt (8 ohms, @1.50 meters)

RCF L15P200-AK

MLSSA: Frequency Domain

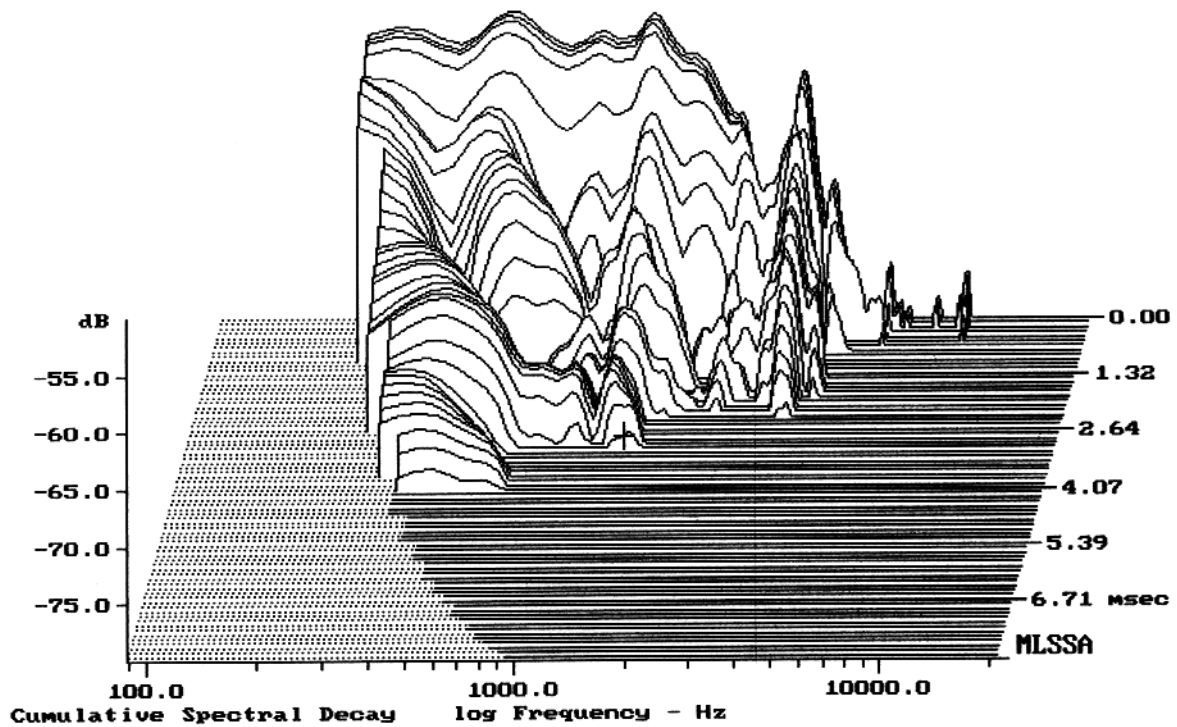

-78.95 dB, 1376 Hz (31), 3.000 msec (29)