

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.34	Ohms
2	Fs	45.15	Hz
3	Re	4.89	Ohms[dc]
4	Res	95.68	Ohms
5	Qms	6.92	
6	Qes	0.35	
7	Qts	0.34	
8	L1	0.83	mH
9	L2	1.71	mH
10	R2	5.52	Ohms
11	RMSE-load	0.66	Ohms
12	Vas(Sd)	170.96	liters
13	Mms	74.67	grams
14	Cms	166	$\mu\text{M}/\text{Newton}$
15	B1	17.11	Tesla-M
16	SPLref(Sd)	98.3	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -30.0% (-20% to -50% is recommended).


RCF L15P530

MLSSA: Parameters

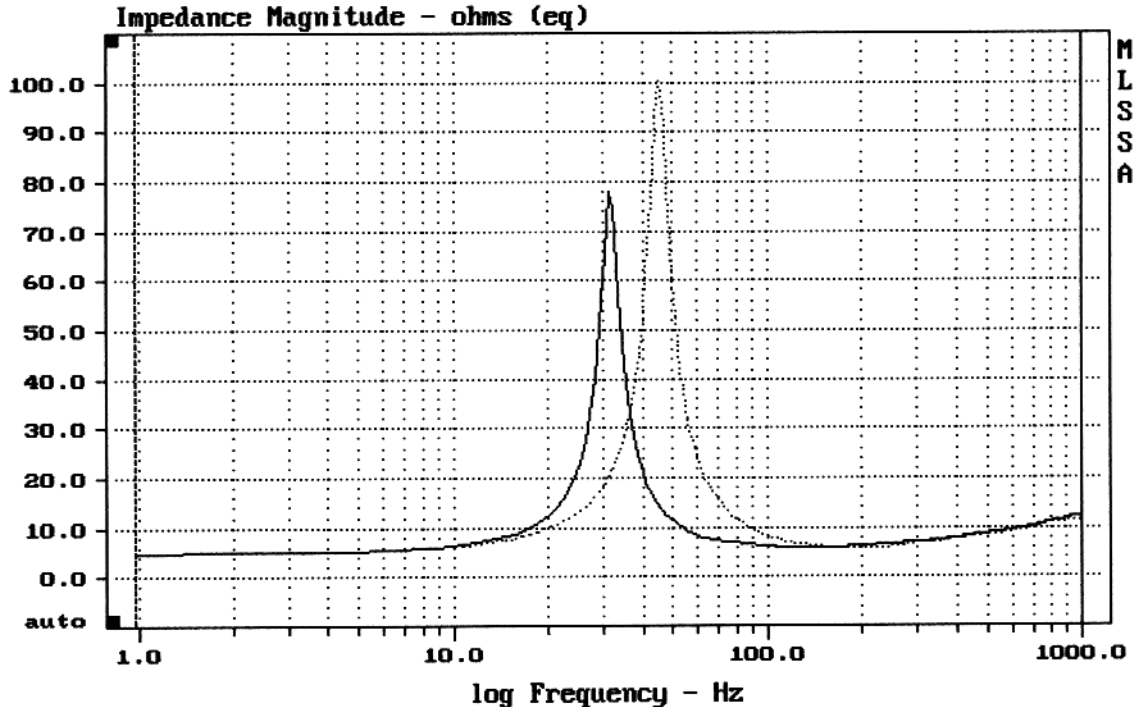

mean: 10.23, rms: 13.18, std: 8.301, max: 100.1, min: 4.935


MLSSA: Frequency Domain

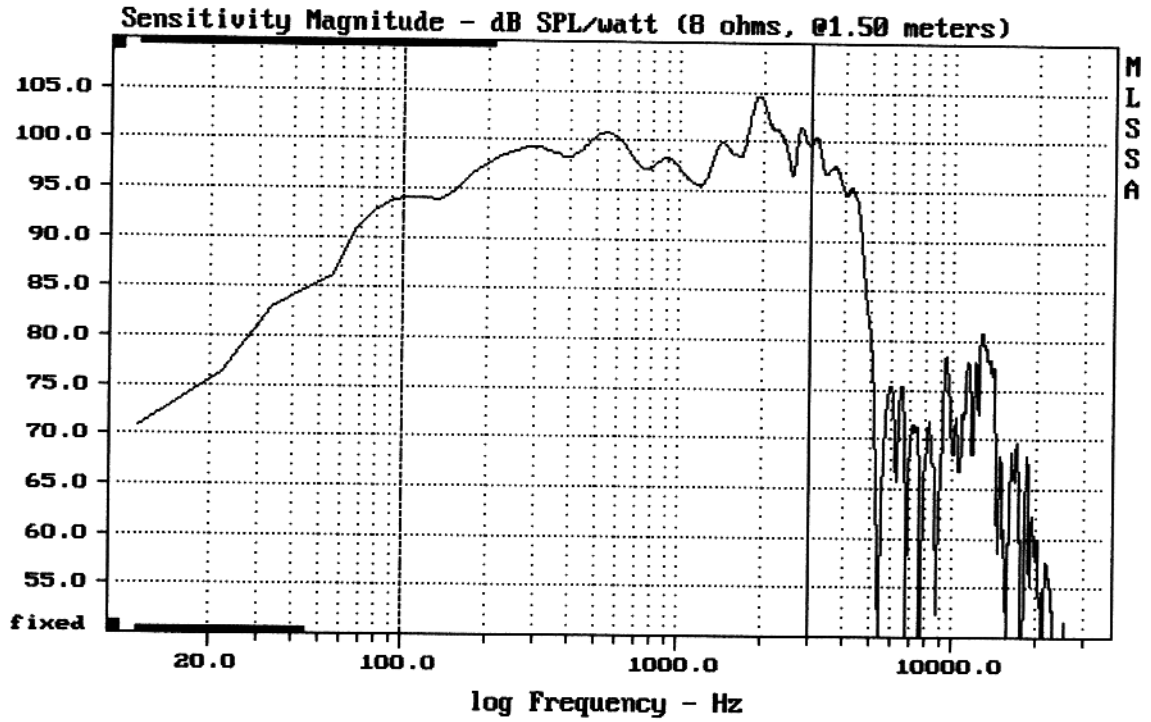

Level (100:2996 Hz) = 98.81 dB SPL/watt (8 ohms, @1.50 meters)

RCF L15P530

MLSSA: Frequency Domain

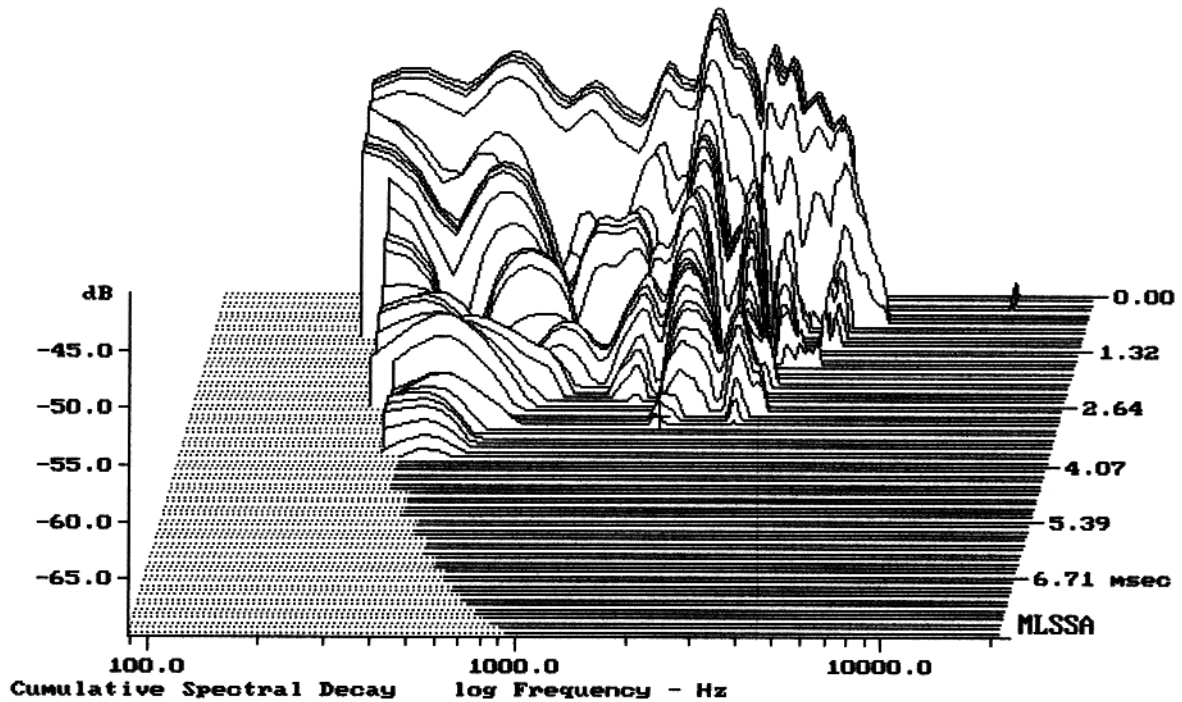

-69.24 dB, 1687 Hz (38), 3.080 msec (29)