

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.33	Ohms
2	Fs	57.80	Hz
3	Re	5.32	Ohms[dc]
4	Res	93.10	Ohms
5	Qms	6.97	
6	Qes	0.40	
7	Qts	0.38	
8	L1	1.07	mH
9	L2	2.22	mH
10	R2	6.65	Ohms
11	RMSE-load	0.90	Ohms
12	Vas(Sd)	102.72	liters
13	Mms	75.83	grams
14	Cms	100	$\mu\text{M}/\text{Newton}$
15	B1	19.18	Tesla-M
16	SPLref(Sd)	98.8	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -29.2% (-20% to -50% is recommended).


RCF L15P540

MLSSA: Parameters

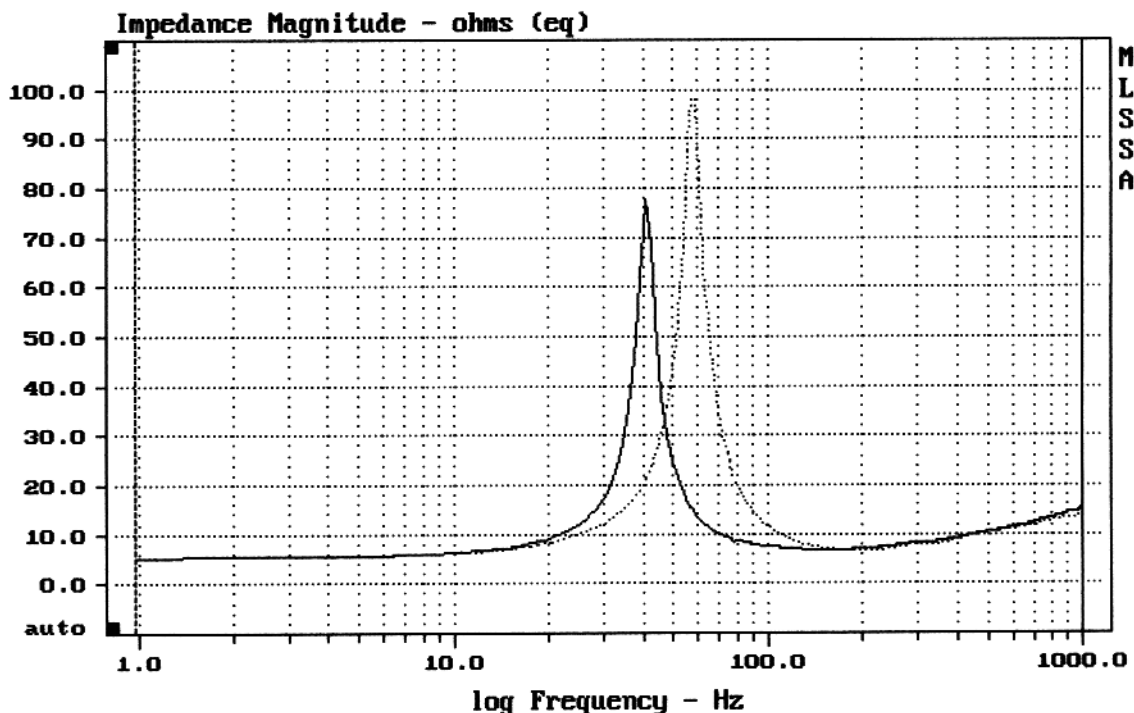

mean: 11.97, rms: 14.91, std: 8.881, max: 98.83, min: 5.311


MLSSA: Frequency Domain

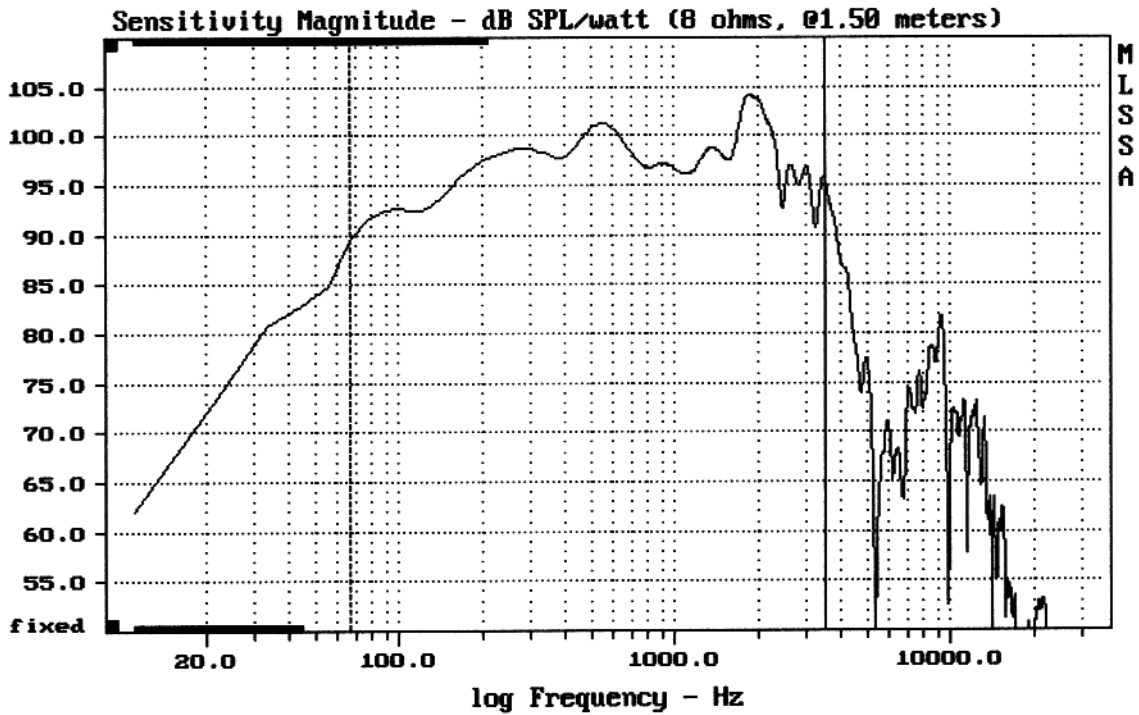

Level (67:3496 Hz) = 97.94 dB SPL/watt (8 ohms, @1.50 meters)

RCF L15P540

MLSSA: Frequency Domain

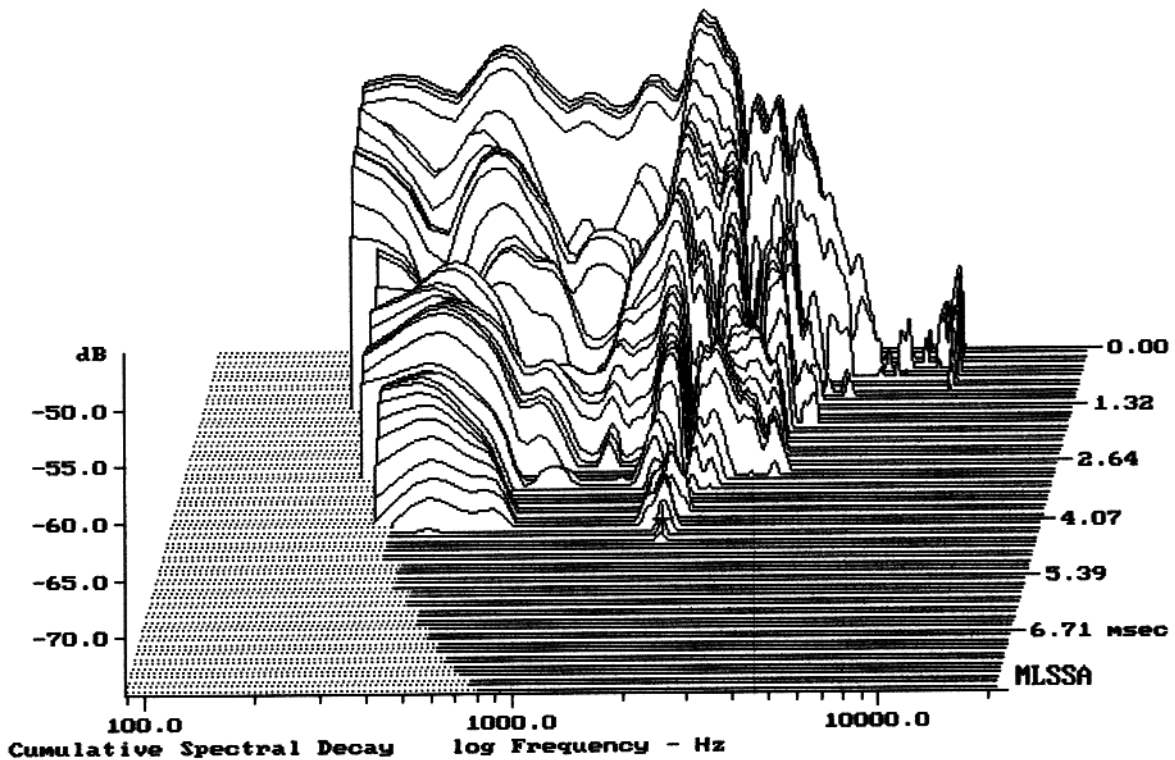

-73.69 dB, 1953 Hz (44), 4.400 msec (41)