


Level (100:3007 Hz) = 99.06 dB SPL/watt (8 ohms, @1.50 meters)

LF15N301

MLSSA: Frequency Domain

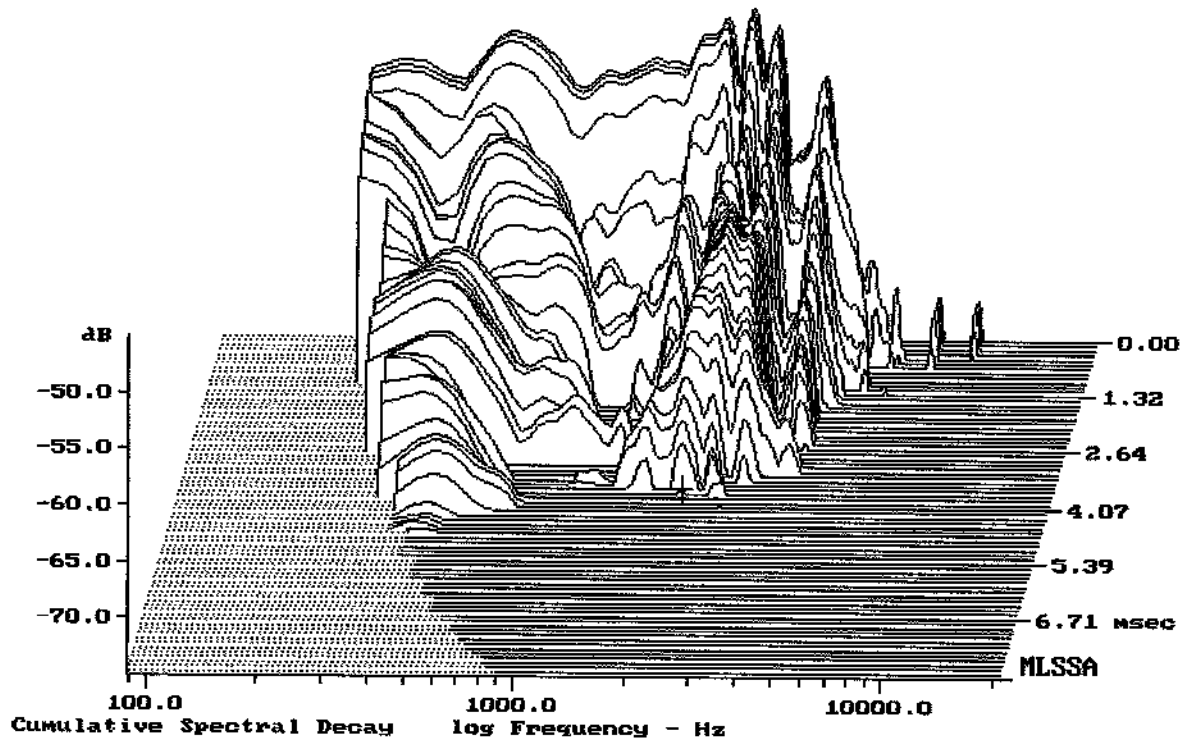

-74.55 dB, 2086 Hz (47), 3.740 msec (35)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.54	Ohms
2	Fs	40.87	Hz
3	Re	4.90	Ohms[dc]
4	Res	92.29	Ohms
5	Qms	5.74	
6	Qes	0.30	
7	Qts	0.29	
8	L1	0.86	mH
9	L2	1.33	mH
10	R2	4.48	Ohms
11	RMSE-load	0.28	Ohms
12	Vas(Sd)	180.55	liters
13	Mms	91.65	grams
14	Cms	165	$\mu\text{M}/\text{Newton}$
15	B1	19.45	Tesla-M
16	SPLref(Sd)	97.9	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (80.00 grams)

Area (Sd): 881.41 sq cm


DCR mode: Measure (-0.16 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -26.3% (-20% to -50% is recommended).

LF15N301

MLSSA: Parameters

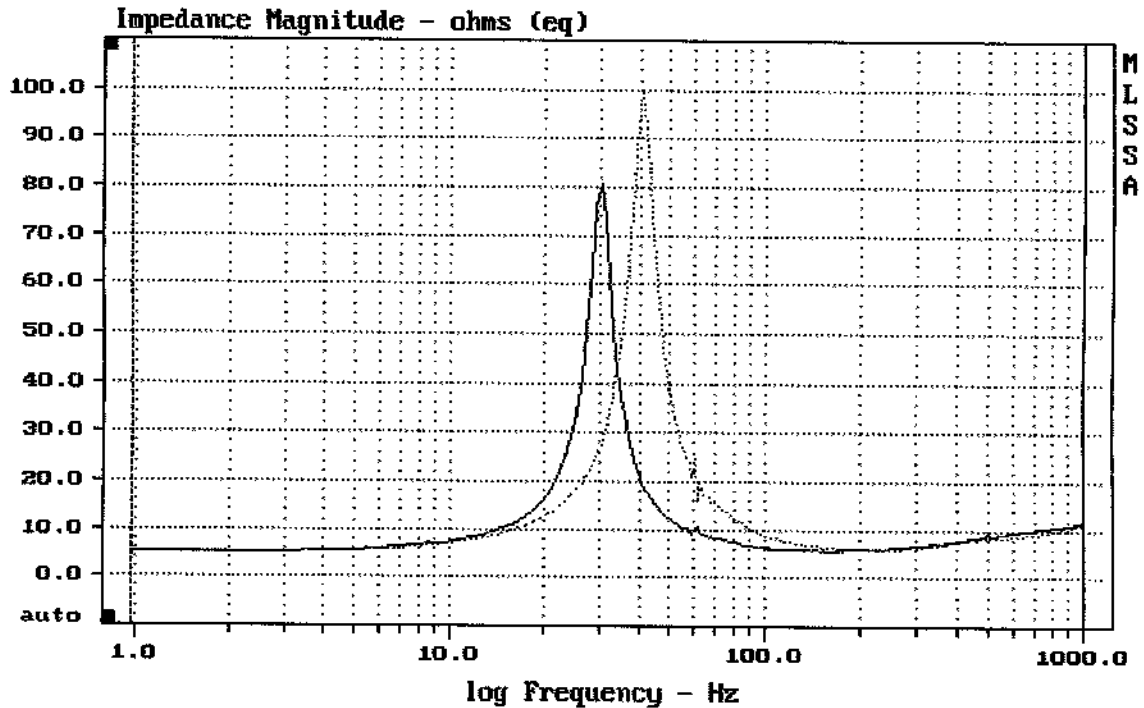

mean: 9.9, rms: 12.95, std: 8.349, max: 99.39, min: 5.071

MLSSA: Frequency Domain