



Level (55:2308 Hz) = 97.09 dB SPL/watt (8 ohms, @1.50 meters)

LF18N401 2009/11

MLSSA: Frequency Domain

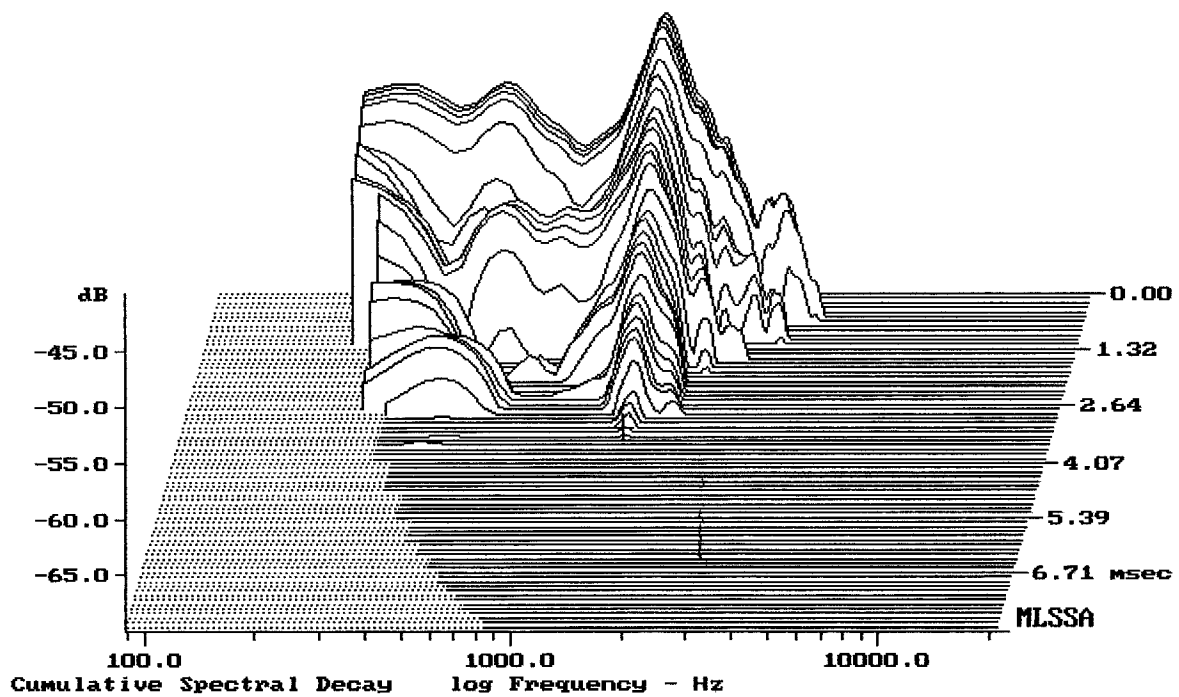


-69.65 dB, 1420 Hz (32), 3.300 msec (31)

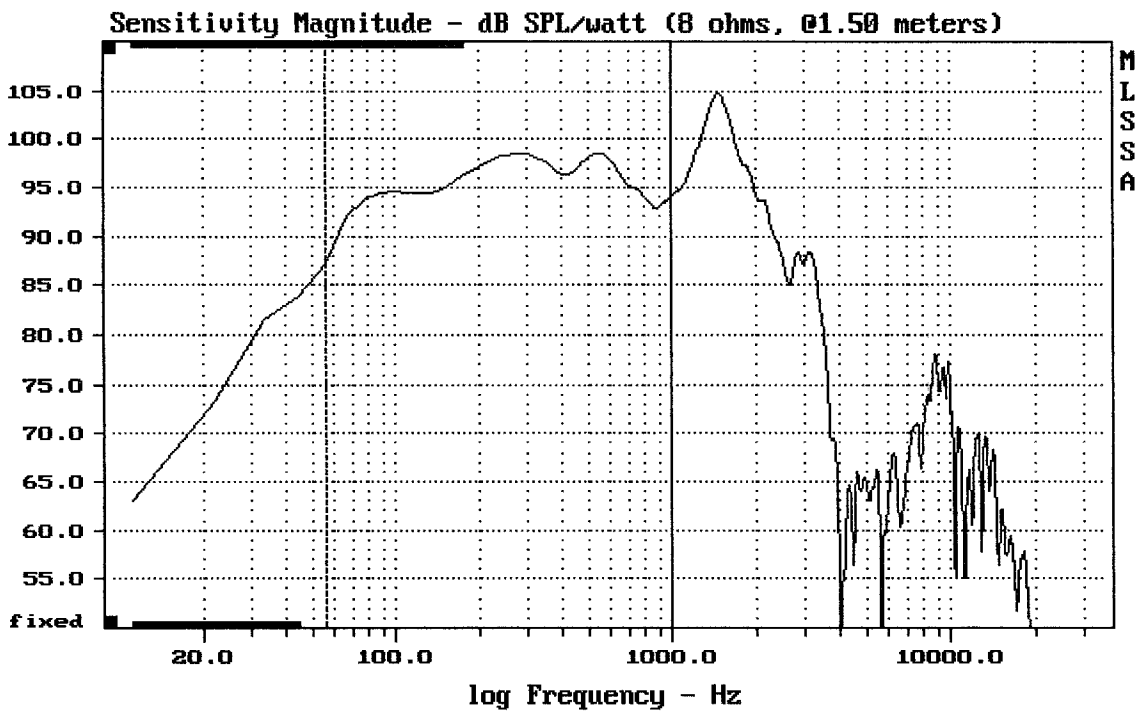

Level (55.999 Hz) = 95.98 dB SPL/watt (8 ohms, @1.50 meters)

LF18N401 2009/11

MLSSA: Frequency Domain

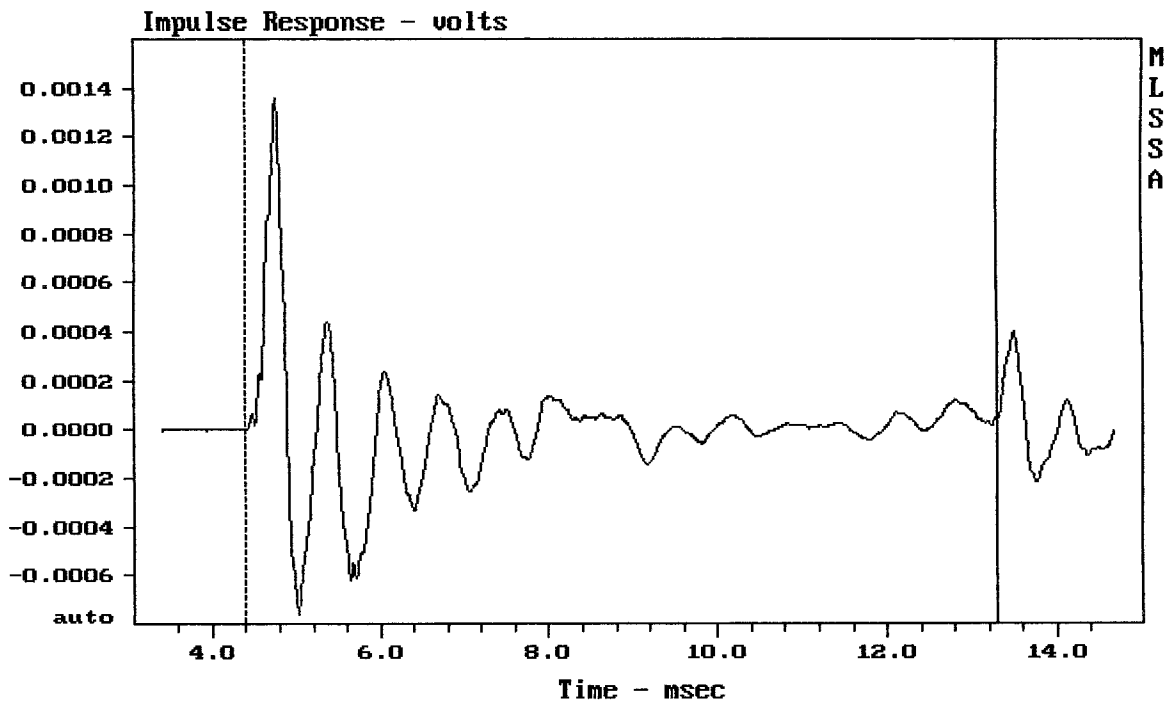

mean: 1.495e-006, rms: 0.0002395, std: 0.0002395, max: 0.001359, min: -0.00075

LF18N401 2009/11

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.65	Ohms
2	Fs	37.87	Hz
3	Re	5.00	Ohms[dc]
4	Res	91.22	Ohms
5	Qms	6.10	
6	Qes	0.33	
7	Qts	0.32	
8	L1	1.51	mH
9	L2	2.12	mH
10	R2	7.27	Ohms
11	RMSE-load	0.61	Ohms
12	Vas(Sd)	234.45	liters
13	Mms	167.10	grams
14	Cms	106	μ M/Newton
15	Bl	24.38	Tesla-M
16	SPLref(Sd)	97.6	dB[Re]
17	Rub-index	0.02	

Method: Mass-loaded (120.00 grams)

Area (Sd): 1256.64 sq cm


DCR mode: Measure (-0.14 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -21.8% (-20% to -50% is recommended).

LF18N401 2009/11

MLSSA: Parameters

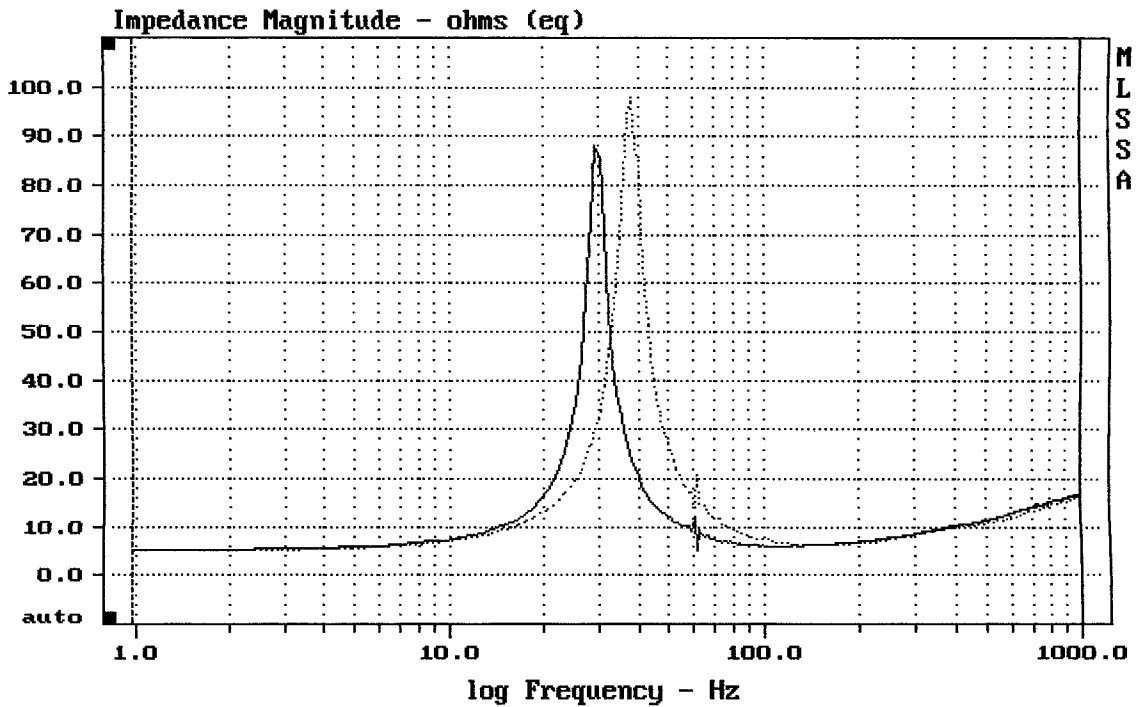

mean: 12.38, rms: 14.64, std: 7.804, max: 97.76, min: 5.202

MLSSA: Frequency Domain