


Level (100:4006 Hz) = 97.43 dB SPL/watt (8 ohms, @1.00 meters)

MB12N251

MLSSA: Frequency Domain

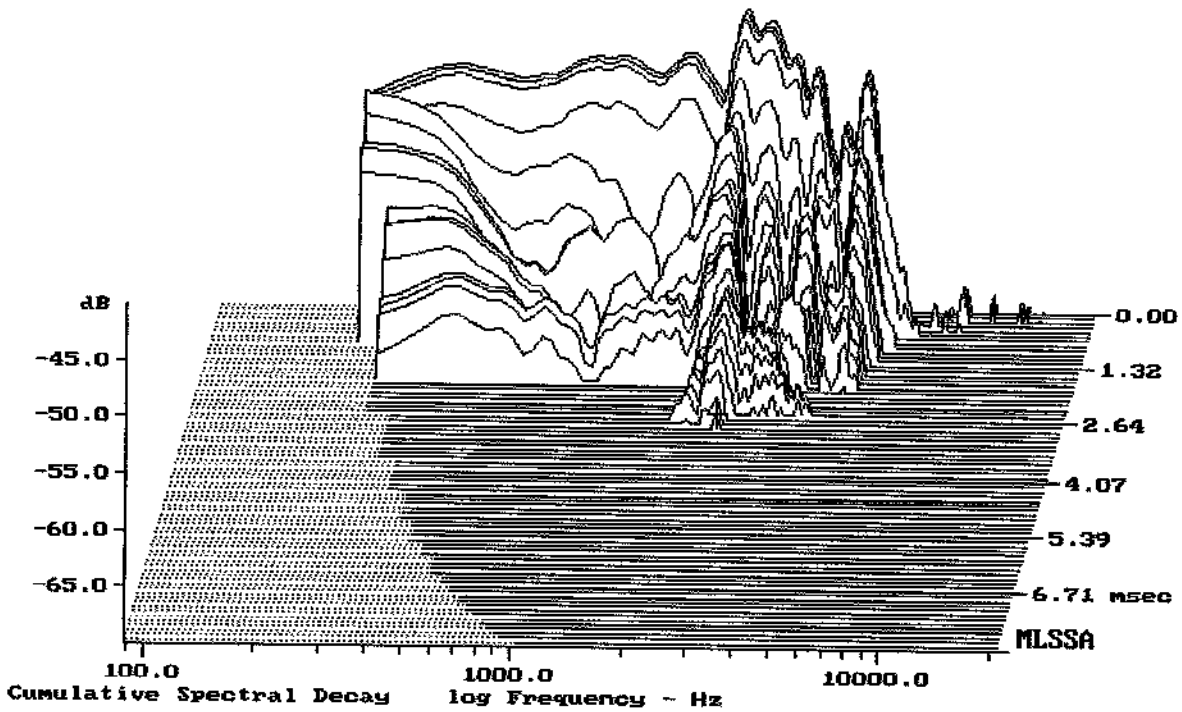

-68.71 dB, 2441 Hz (55), 2.860 msec (27)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.43	Ohms
2	Fs	50.15	Hz
3	Re	5.40	Ohms[dc]
4	Res	104.47	Ohms
5	Qms	7.94	
6	Qes	0.41	
7	Qts	0.39	
8	L1	0.72	mH
9	L2	0.91	mH
10	R2	3.52	Ohms
11	RMSE-load	0.44	Ohms
12	Vas(Sd)	90.59	liters
13	Mms	44.02	grams
14	Cms	229	$\mu\text{M}/\text{Newton}$
15	B1	13.51	Tesla-M
16	SPLref(Sd)	96.3	dB[Re]
17	Rub-index	0.04	

Method: Mass-loaded (40.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.16 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -26.2% (-20% to -50% is recommended).

MB12N251

MLSSA: Parameters

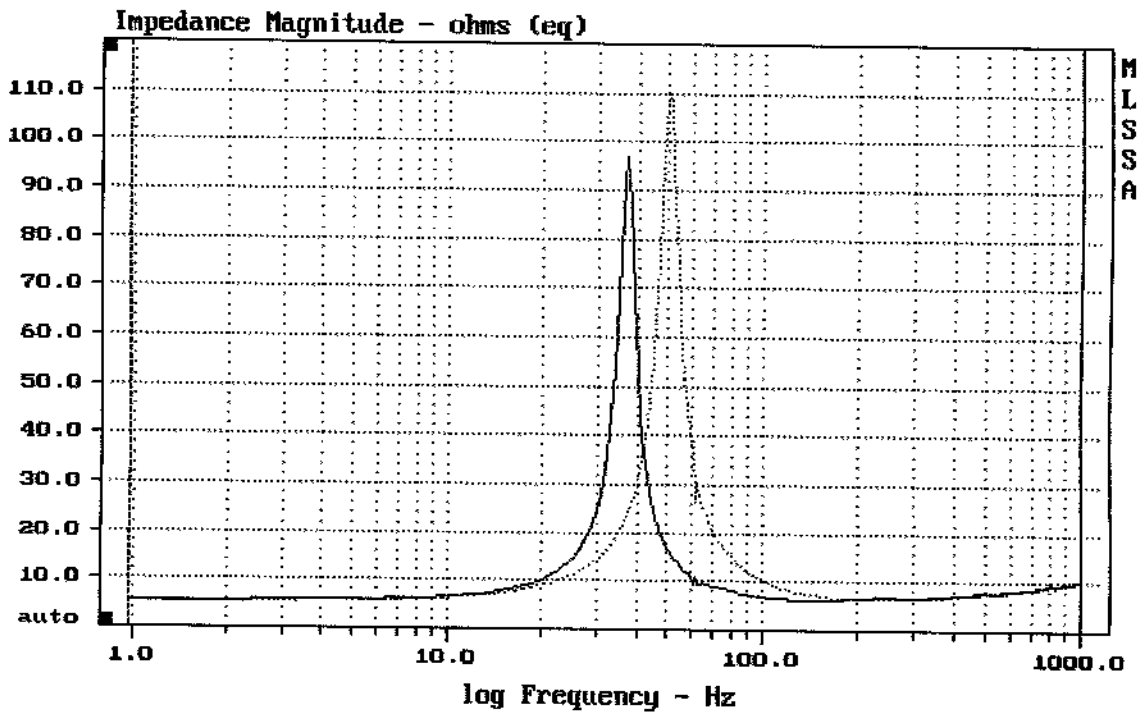

mean: 9.634, rms: 13.25, std: 9.093, max: 110.1, min: 5.548

MLSSA: Frequency Domain