


Level (100:4006 Hz) = 97.36 dB SPL/watt (8 ohms, @1.00 meters)

MB12N301

MLSSA: Frequency Domain

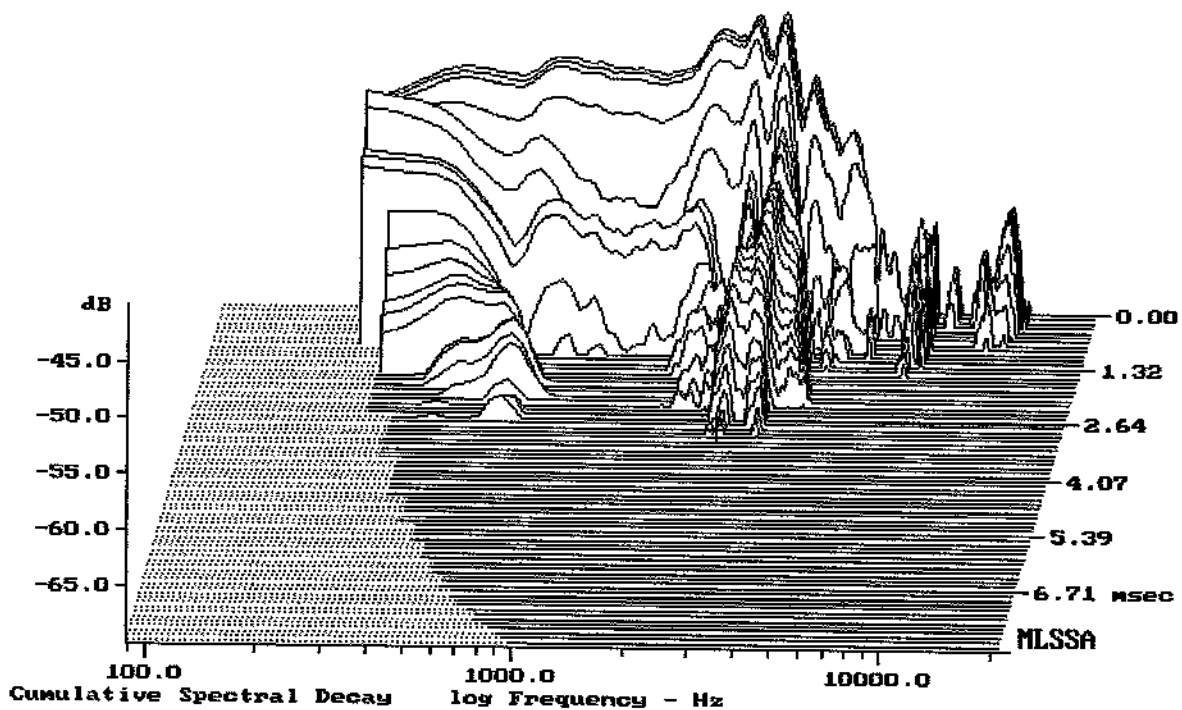

-69.62 dB, 2441 Hz (55), 2.970 msec (28)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.78	Ohms
2	Fs	53.46	Hz
3	Re	6.03	Ohms[dc]
4	Res	126.95	Ohms
5	Qms	7.05	
6	Qes	0.33	
7	Qts	0.32	
8	L1	0.74	mH
9	L2	1.09	mH
10	R2	3.74	Ohms
11	RMSE-load	0.45	Ohms
12	Vas(Sd)	67.05	liters
13	Mms	52.34	grams
14	Cms	169	$\mu\text{M}/\text{Newton}$
15	B1	17.79	Tesla-M
16	SPLref(Sd)	96.7	dB[Re]
17	Rub-index	0.08	

Method: Mass-loaded (40.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.16 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -23.6% (-20% to -50% is recommended).

MB12N301

MLSSA: Parameters

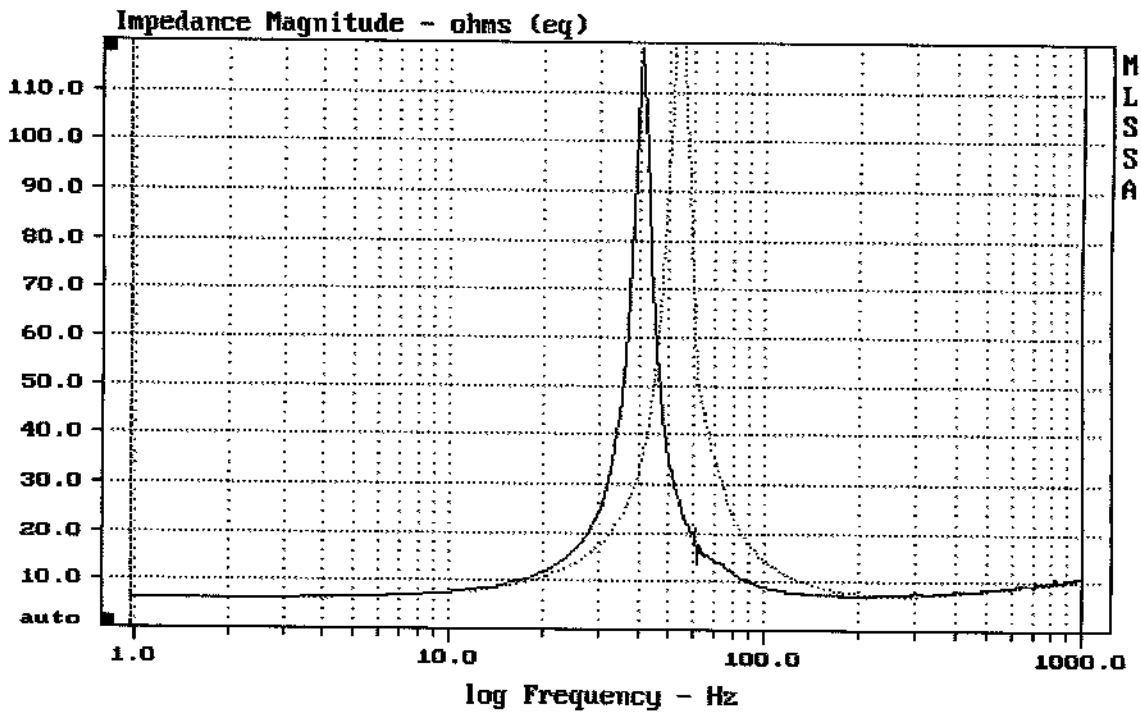

mean: 11.25, rms: 16.54, std: 12.12, max: 136.7, min: 6.148

MLSSA: Frequency Domain