


Level (100:3007 Hz) = 99.47 dB SPL/watt (8 ohms, @1.50 meters)

MB15N407

MLSSA: Frequency Domain

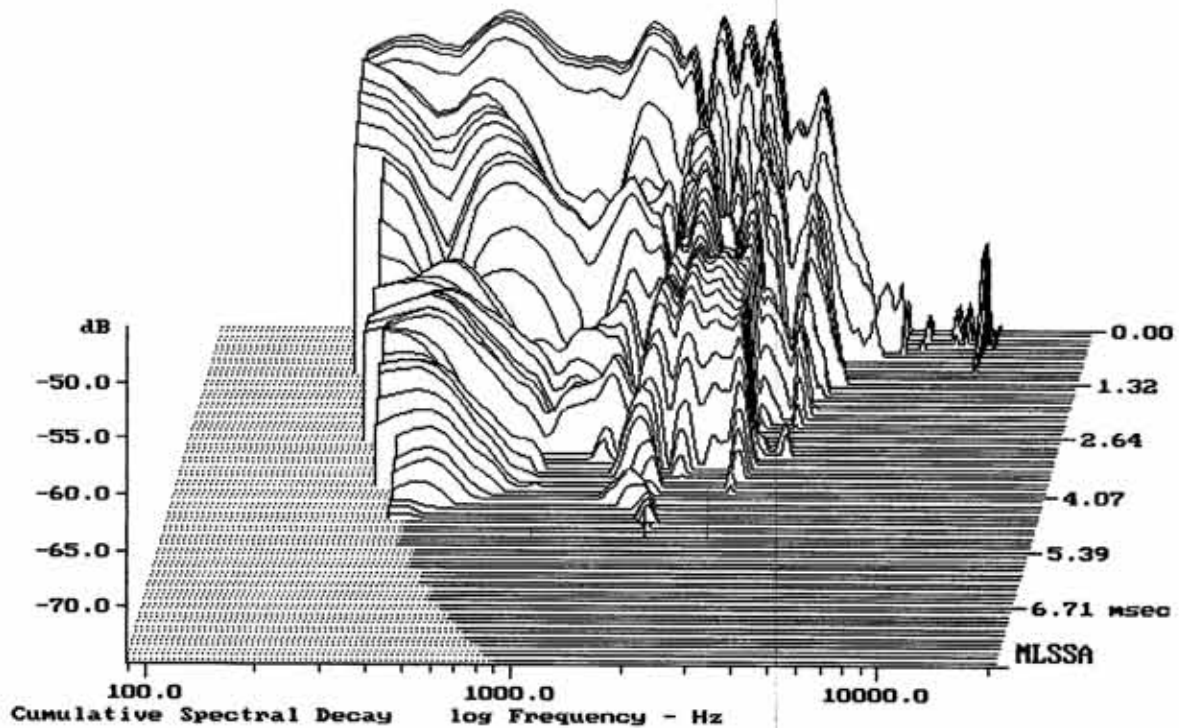

-74.59 dB, 1820 Hz (41), 4.840 msec (45)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.93	Ohms
2	Fs	48.40	Hz
3	Re	4.88	Ohms[dc]
4	Res	114.74	Ohms
5	Qms	5.60	
6	Qes	0.24	
7	Qts	0.23	
8	L1	0.90	mH
9	L2	1.54	mH
10	R2	5.18	Ohms
11	RMSE-load	0.67	Ohms
12	Vas(Sd)	114.17	liters
13	Mms	103.35	grams
14	Cms	105	$\mu\text{M}/\text{Newton}$
15	B1	25.38	Tesla-M
16	SPLref(Sd)	99.2	dB[Re]
17	Rub-index	0.15	

Method: Mass-loaded (80.00 grams)

Area (Sd): 881.41 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -25.1% (-20% to -50% is recommended).

MB15N407

MLSSA: Parameters

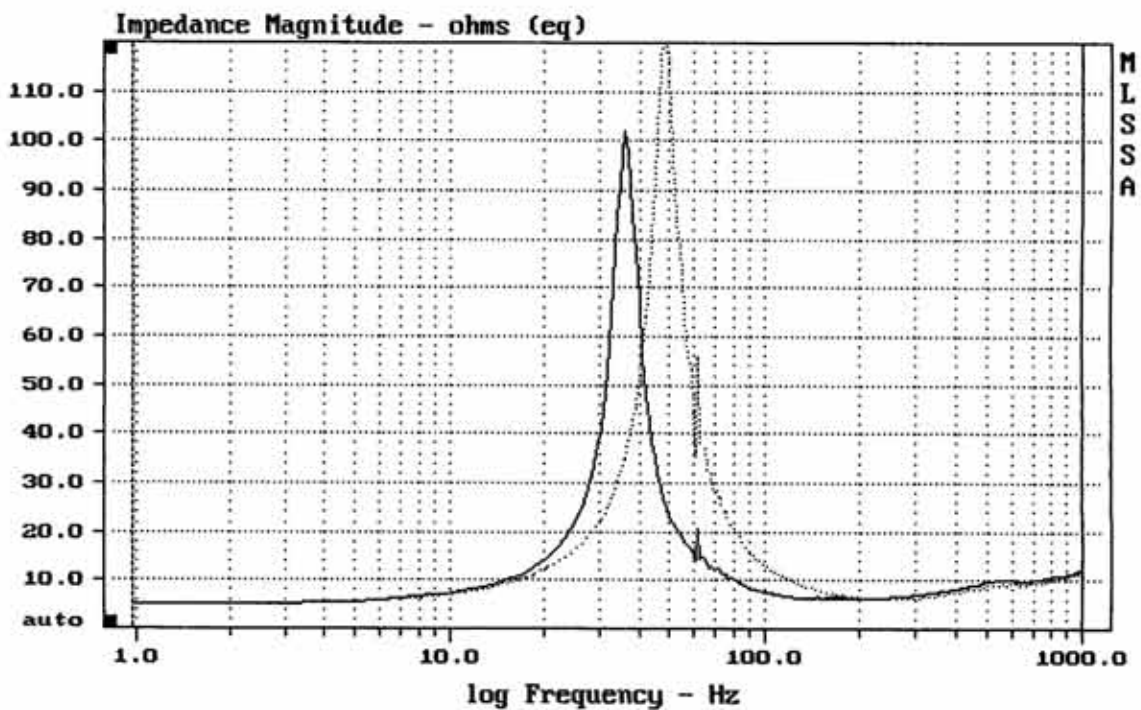

 mean: 11.11, rms: 15.98, std: 11.48, max: 122.3, min: 5.029

MLSSA: Frequency Domain