


Level (44:178 Hz) = 74.45 dB SPL/watt (2 ohms, @0.10 meters)

ROCKFORD FOSGATE POWER T110D4

MLSSA: Frequency Domain

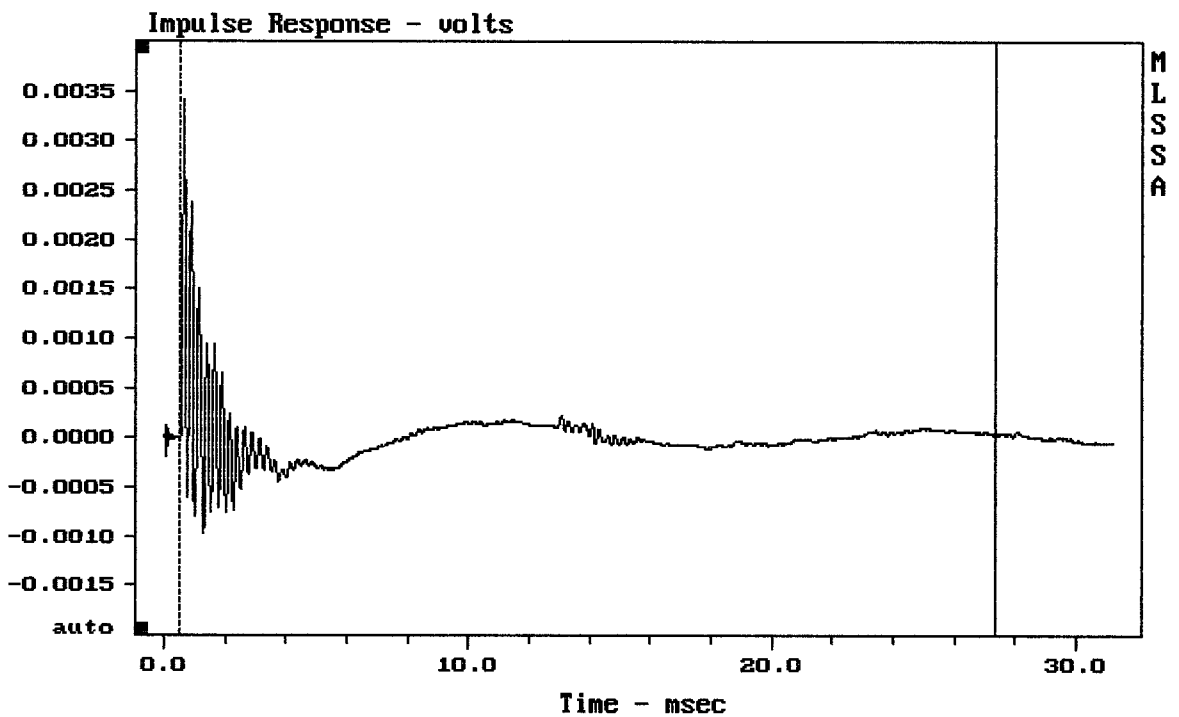

mean: 4.952e-006, rms: 0.0002977, std: 0.0002977, max: 0.003417, min: -0.00096

ROCKFORD FOSGATE POWER T110D4

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.36	Ohms
2	Fs	41.23	Hz
3	Re	1.51	Ohms[dc]
4	Res	9.89	Ohms
5	Qms	5.95	
6	Qes	0.91	
7	Qts	0.79	
8	L1	0.67	mH
9	L2	1.62	mH
10	R2	6.13	Ohms
11	RMSE-load	0.33	Ohms
12	Vas(Sd)	12.25	liters
13	Mms	152.29	grams
14	Cms	98	$\mu\text{M}/\text{Newton}$
15	Bl	8.10	Tesla-M
16	SPLref(Sd)	81.6	dB[Re]
17	Rub-index	0.03	

Method: Mass-loaded (120.00 grams)

Area (Sd): 298.65 sq cm


DCR mode: Measure (-0.12 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -21.2% (-20% to -50% is recommended).

ROCKFORD FOSGATE POWER T110D4

MLSSA: Parameters

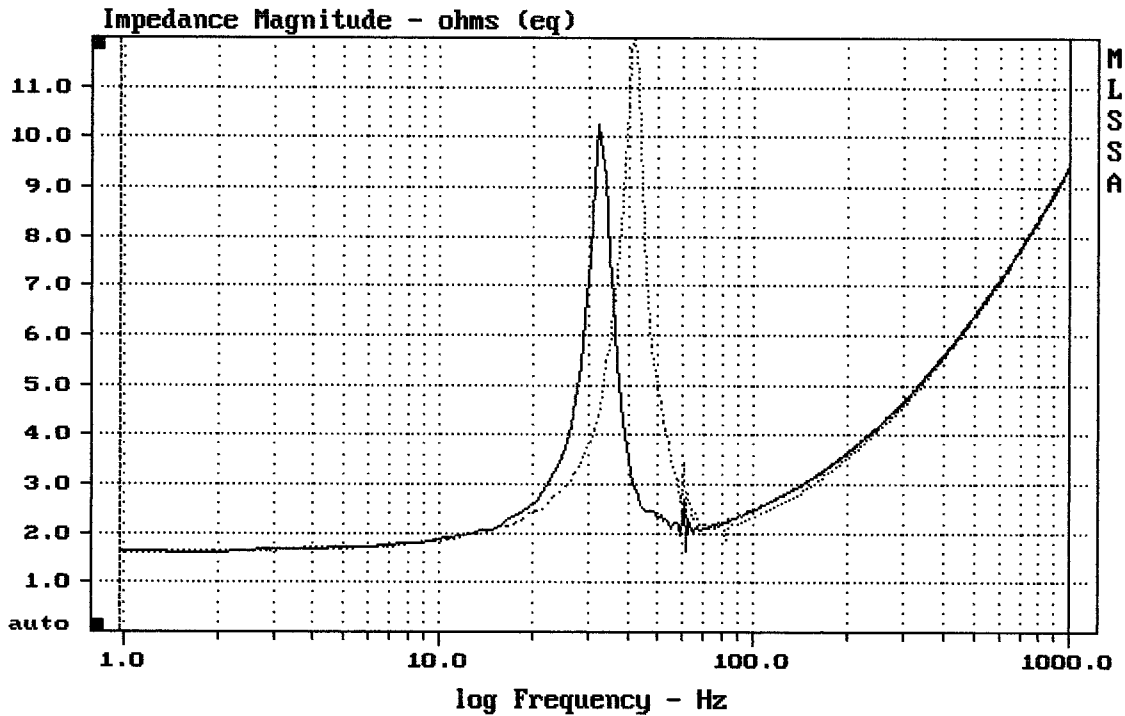

mean: 6.14, rms: 6.533, std: 2.232, max: 11.95, min: 1.605

MLSSA: Frequency Domain