

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.39	Ohms
2	Fs	63.56	Hz
3	Re	6.23	Ohms [dc]
4	Res	74.01	Ohms
5	Qms	15.88	
6	Qes	1.34	
7	Qts	1.23	
8	L1	0.40	mH
9	L2	0.74	mH
10	R2	4.44	Ohms
11	RMSE-load	0.34	Ohms
12	Vas (Sd)	110.72	liters
13	Mms	54.74	grams
14	Cms	115	μ M/Newton
15	B1	10.09	Tesla-M
16	SPLref (Sd)	95.1	dB [Re]
17	Rub-index	0.00	

EBP:51,7

Method: Mass-loaded (60.00 grams)

Area (Sd): 829.58 sq cm


DCR mode: Measure (-0.08 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -27.1% (-20% to -50% is recommended).

SELENIUM 15CV3

MLSSA: Parameters

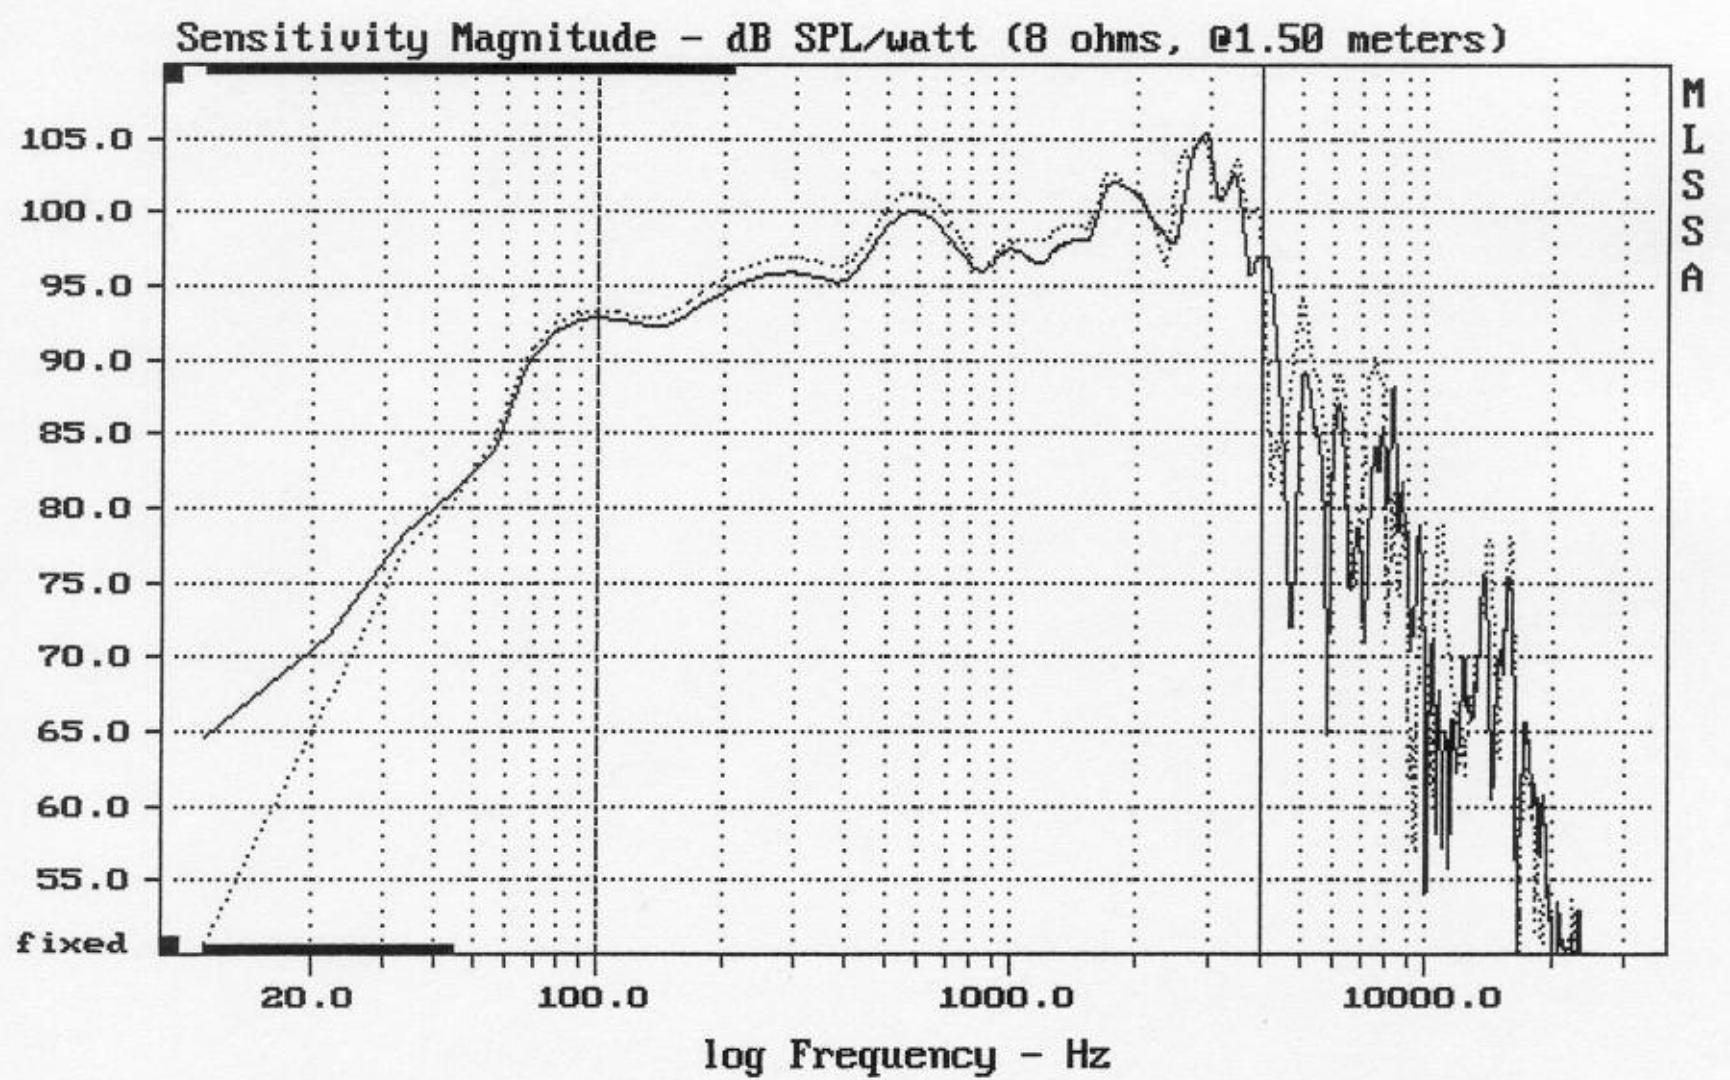

Level (100:3995 Hz) = 99.11 dB SPL/watt (8 ohms, @1.50 meters)

SELENIUM 15CV3