

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.63	Ohms
2	Fs	48.52	Hz
3	Re	6.41	Ohms [dc]
4	Res	278.93	Ohms
5	Qms	14.97	
6	Qes	0.34	
7	Qts	0.34	
8	L1	1.24	mH
9	L2	2.18	mH
10	R2	7.19	Ohms
11	RMSE-load	1.87	Ohms
12	Vas (Sd)	42.44	liters
13	Mms	85.80	grams
14	Cms	125	$\mu\text{M}/\text{Newton}$
15	B1	22.08	Tesla-M
16	SPLref (Sd)	93.3	dB [Re]
17	Rub-index	0.11	

Method: Mass-loaded (80.00 grams)

Area (Sd): 490.87 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -28.9% (-20% to -50% is recommended).

SELENIUM WPU1207


MLSSA: Parameters

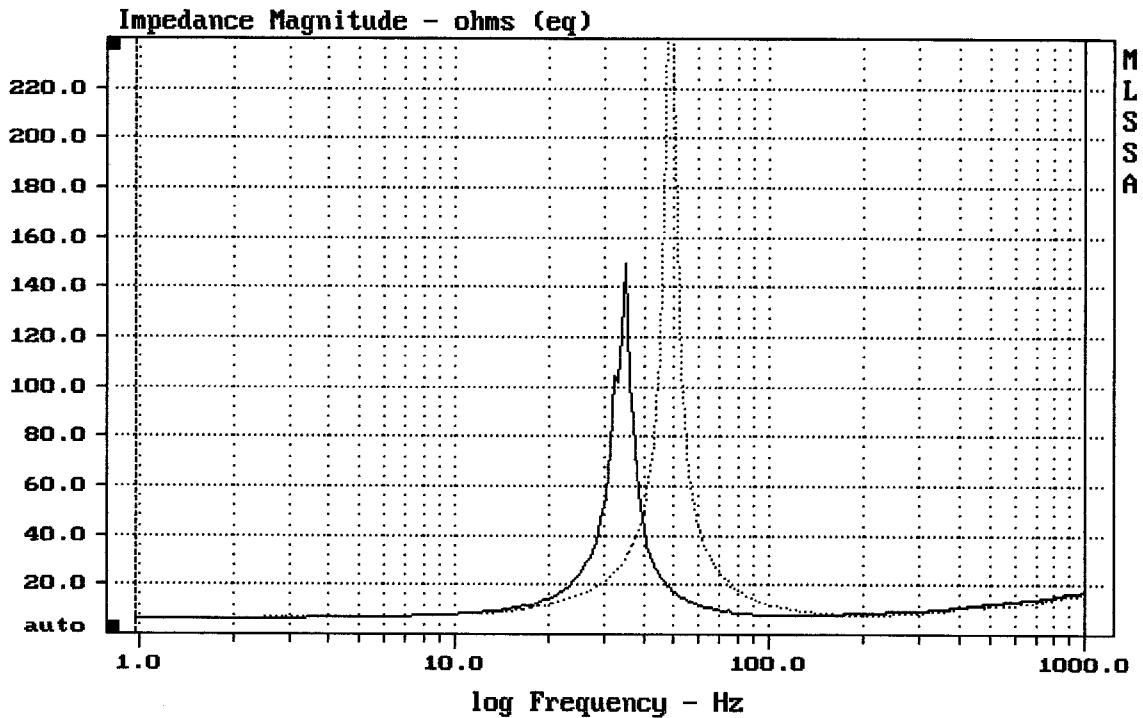

CURSOR: dy = -0.794052 x = 1025.9766 (1025)

DTTO

MLSSA: Frequency Domain

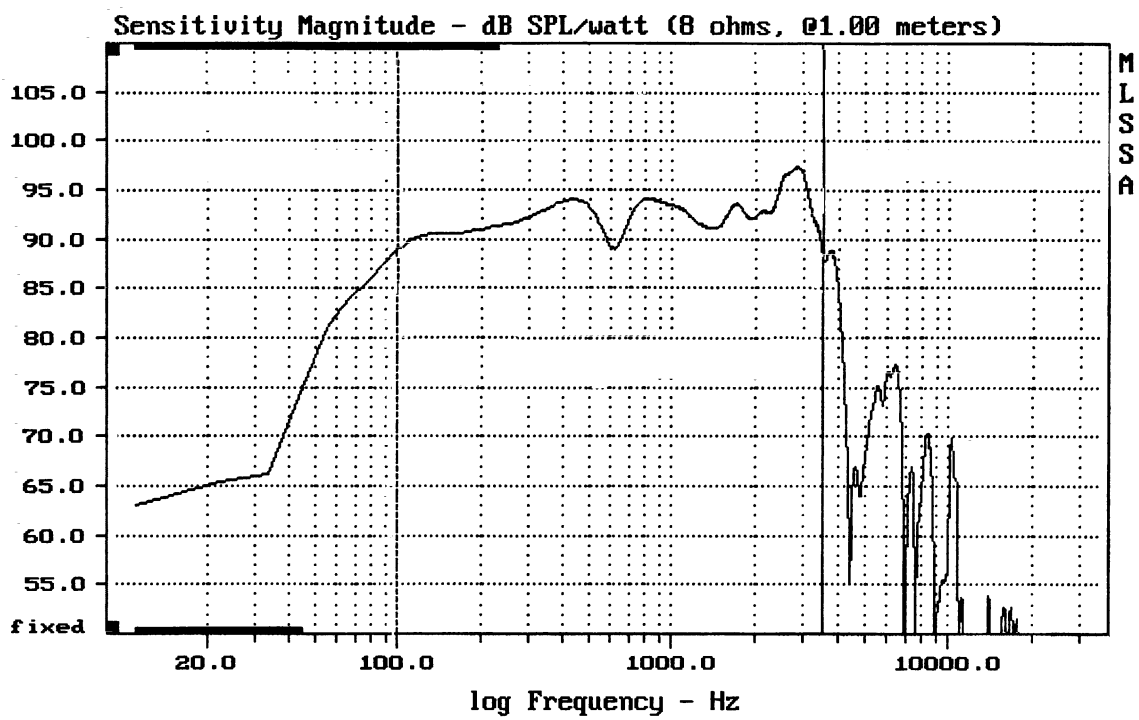

Level (100:3496 Hz) = 92.62 dB SPL/watt (8 ohms, @1.00 meters)

SELENIUM WPU1207