


Level (100:5804 Hz) = 99.72 dB SPL/watt (8 ohms, @1.00 meters)

SELENIUM 12G1

MLSSA: Frequency Domain

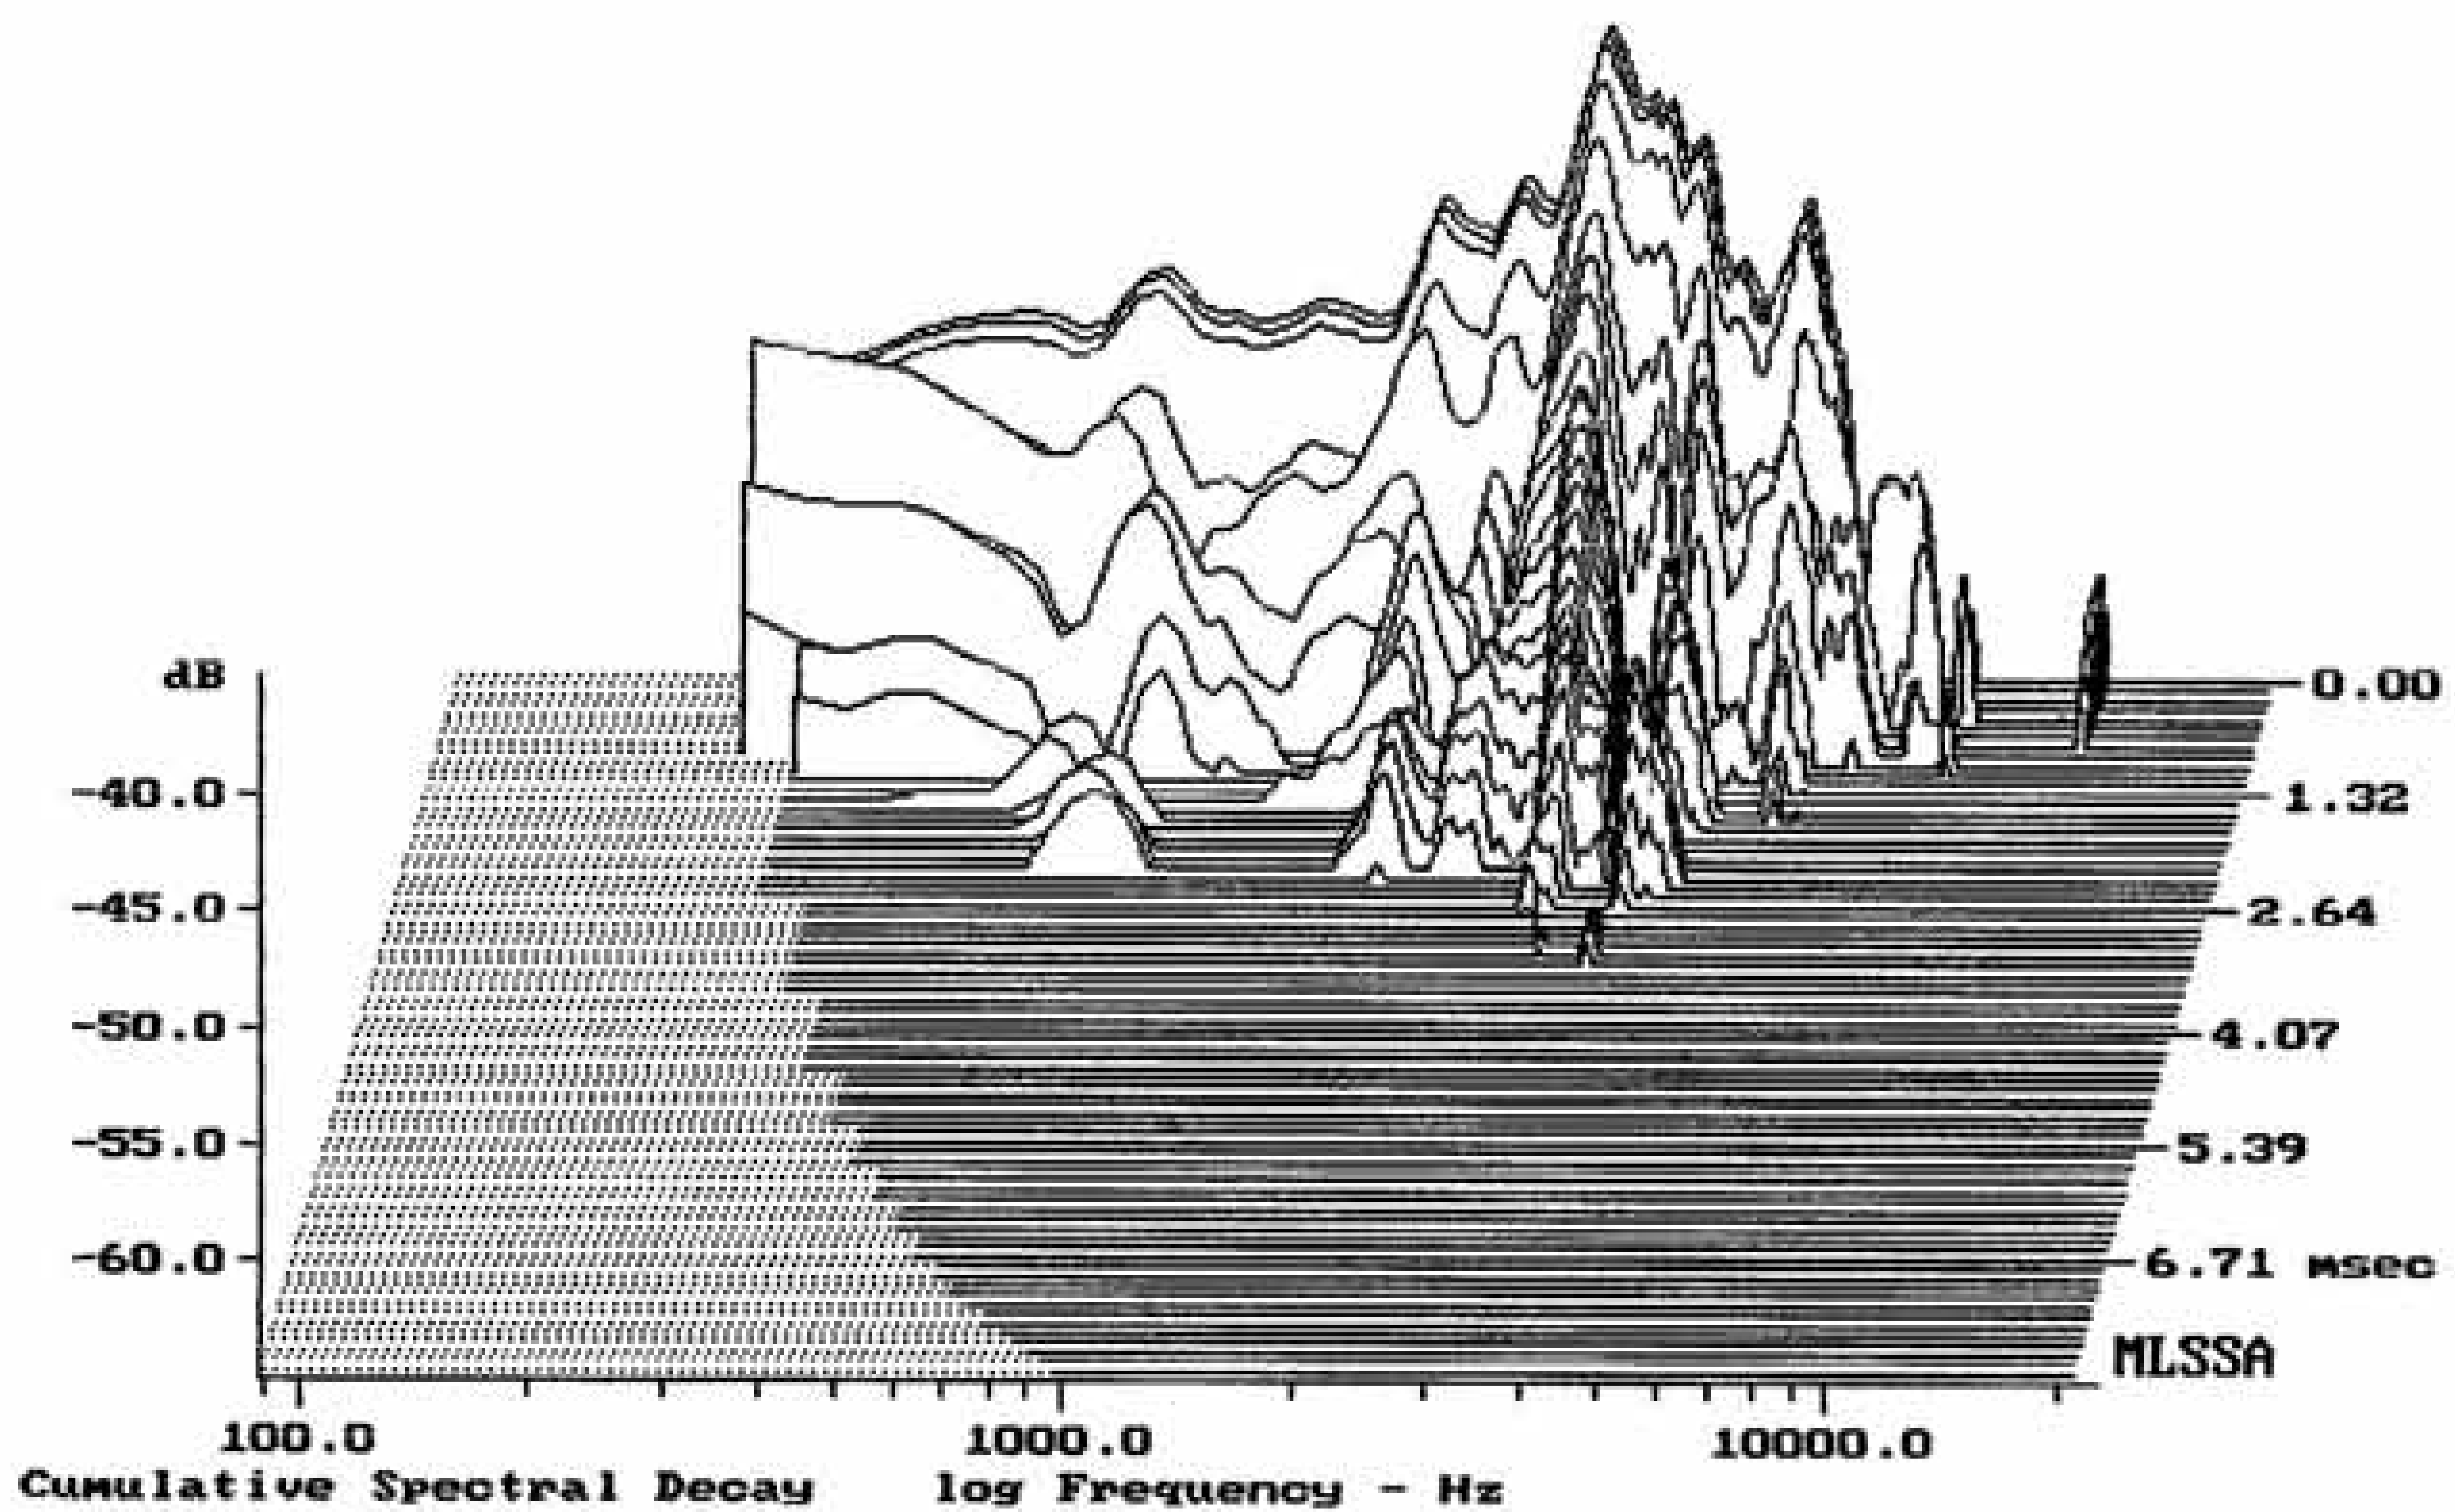

-65.00 dB, 2797 Hz (63), 2.750 msec (26)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.31	Ohms
2	Fs	76.96	Hz
3	Re	6.67	Ohms[dc]
4	Res	115.08	Ohms
5	Qms	15.63	
6	Qes	0.91	
7	Qts	0.86	
8	L1	0.31	mH
9	L2	0.65	mH
10	R2	3.99	Ohms
11	RMSE-load	0.55	Ohms
12	Vas(Sd)	46.01	liters
13	Mms	32.64	grams
14	Cms	131	$\mu\text{M}/\text{Newton}$
15	B1	10.78	Tesla-M
16	SPLref(Sd)	95.5	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (40.00 grams)

Area (Sd): 500.00 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -32.6% (-20% to -50% is recommended).

SELENIUM 12G1

MLSSA: Parameters

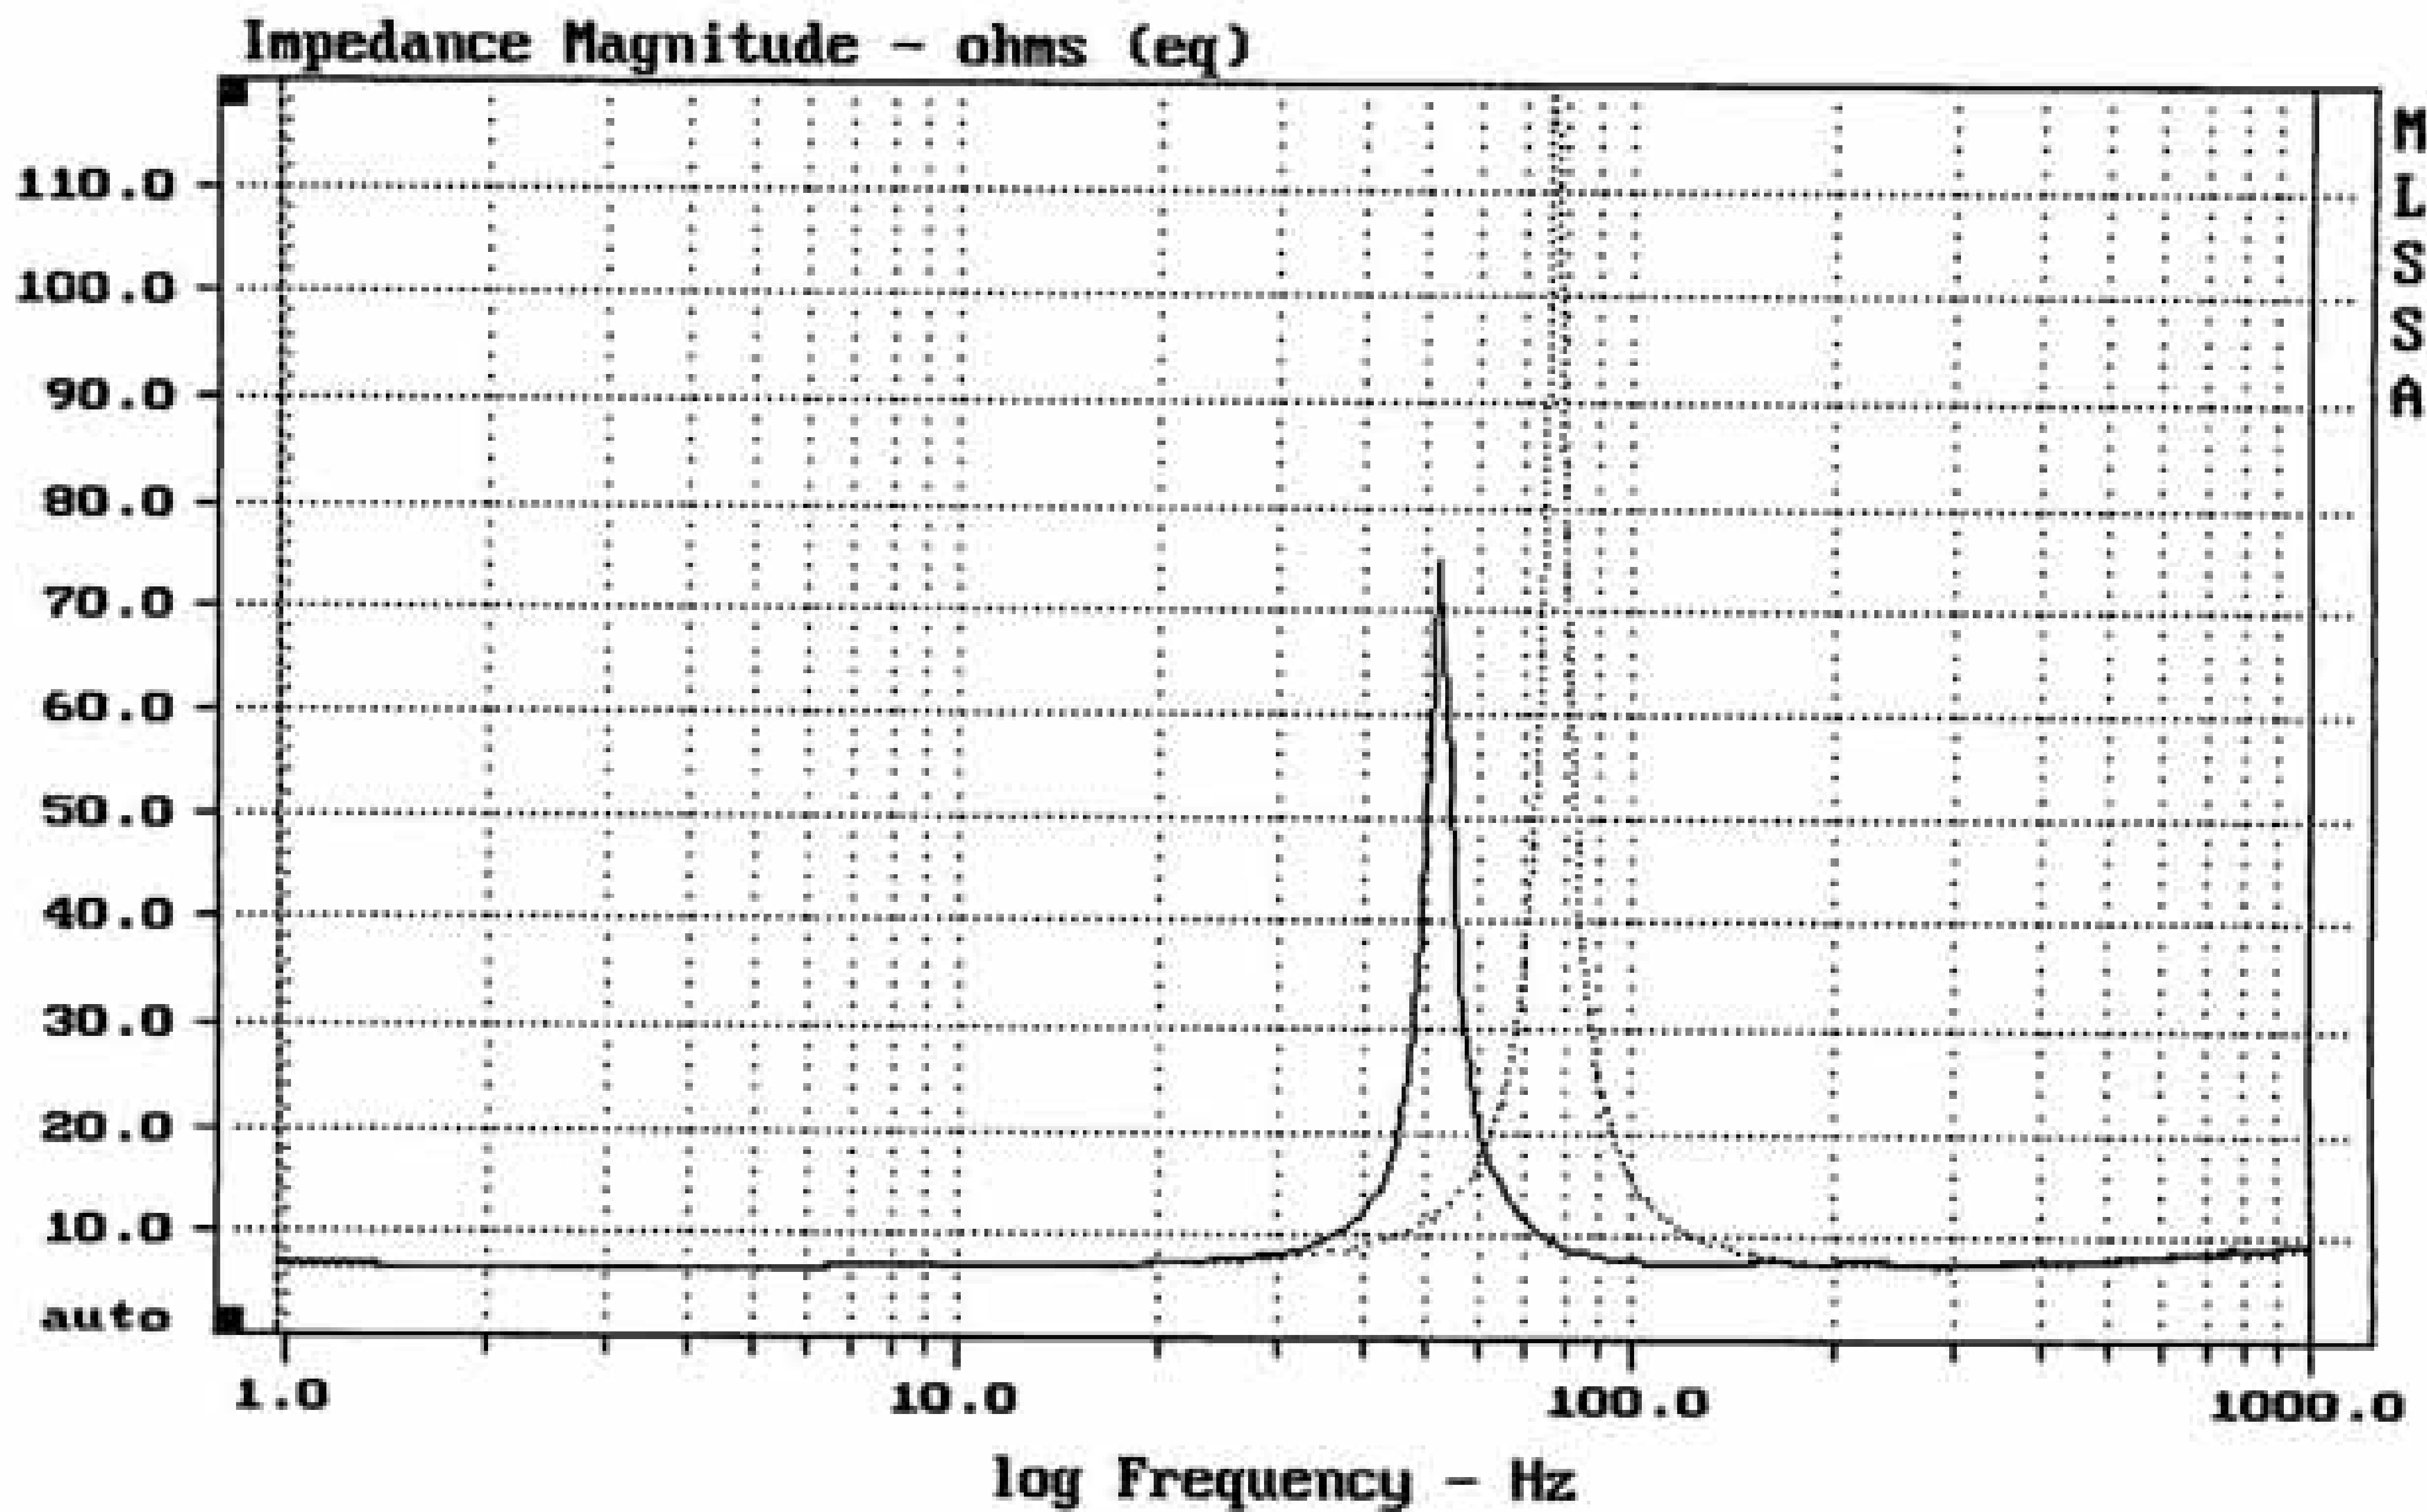

mean: 9.694, rms: 13.23, std: 9.001, max: 121.2, min: 6.702

DTT0

MLSSA: Frequency Domain