


Level (100:4006 Hz) = 97.63 dB SPL/watt (8 ohms, @1.50 meters)

SELENIUM 15B1

MLSSA: Frequency Domain

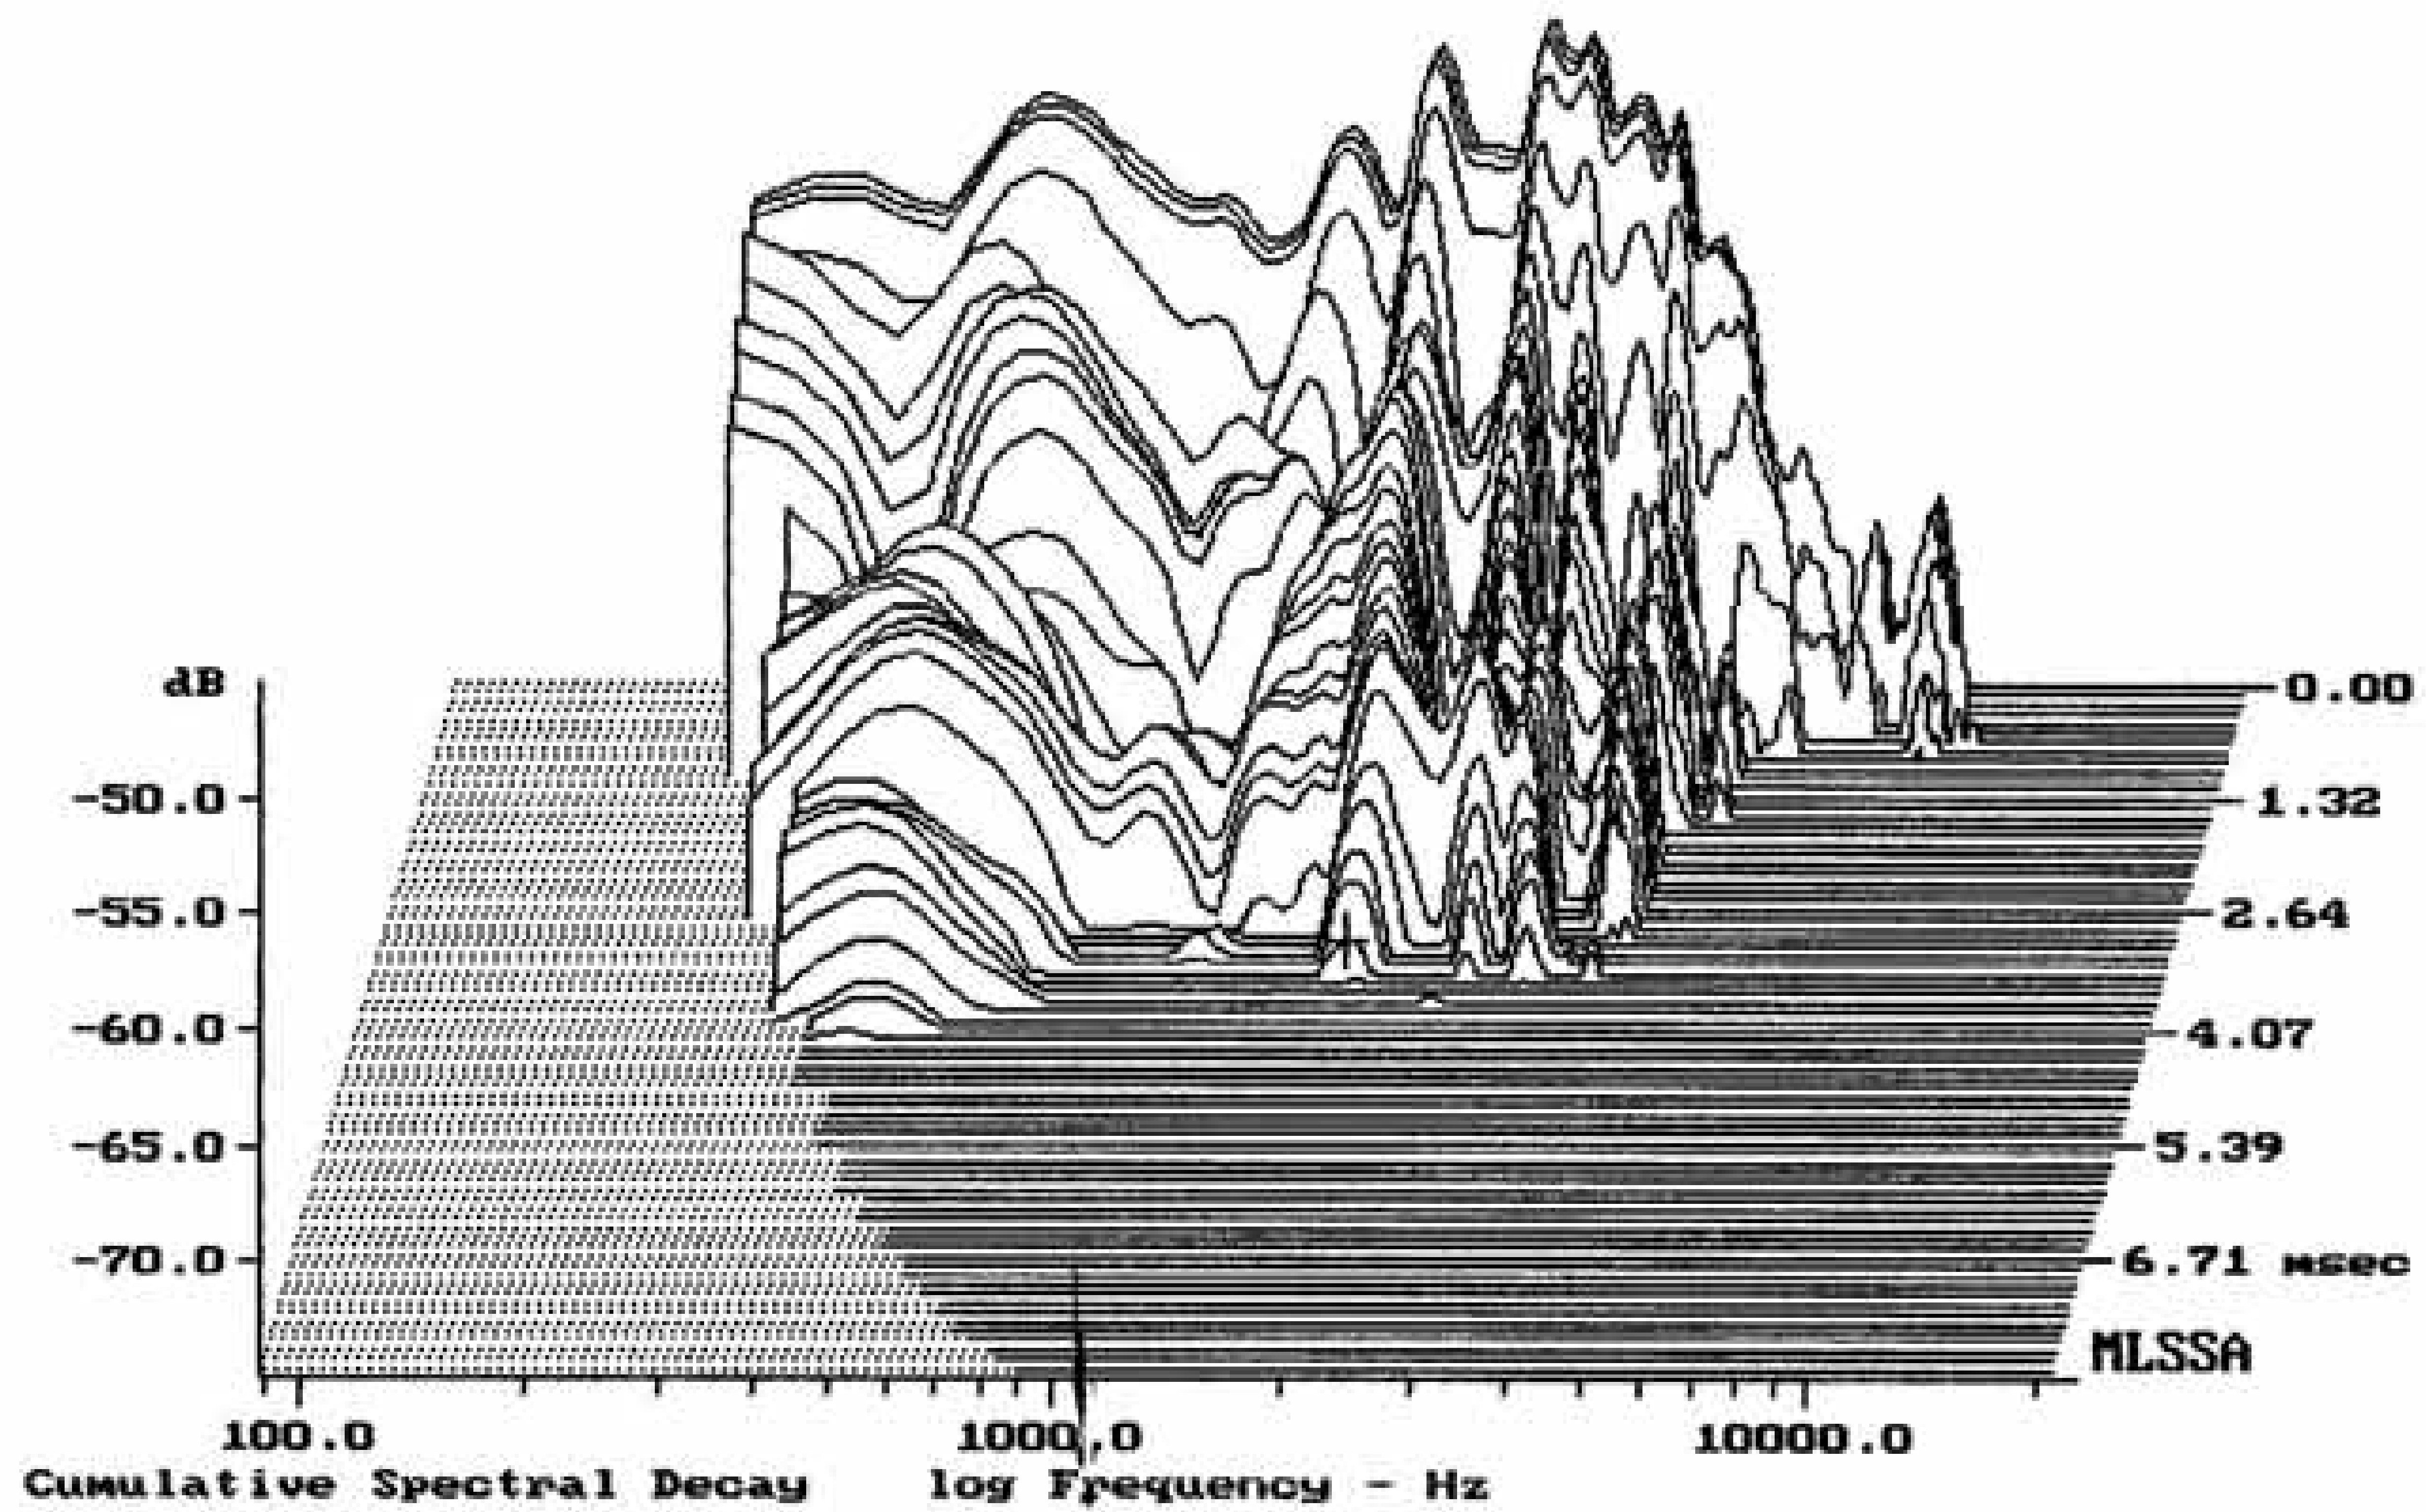

-73.59 dB, 1731 Hz (39), 3.410 msec (32)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.51	Ohms
2	Fs	43.20	Hz
3	Re	5.92	Ohms[dc]
4	Res	98.51	Ohms
5	Qms	12.36	
6	Qes	0.74	
7	Qts	0.70	
8	L1	0.65	mH
9	L2	1.02	mH
10	R2	4.54	Ohms
11	RMSE-load	0.33	Ohms
12	Vas(Sd)	169.01	liters
13	Mms	82.53	grams
14	Cms	164	μ M/Newton
15	B1	13.36	Tesla-M
16	SPLref(Sd)	94.5	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -29.0% (-20% to -50% is recommended).

SELENIUM 15B1

MLSSA: Parameters

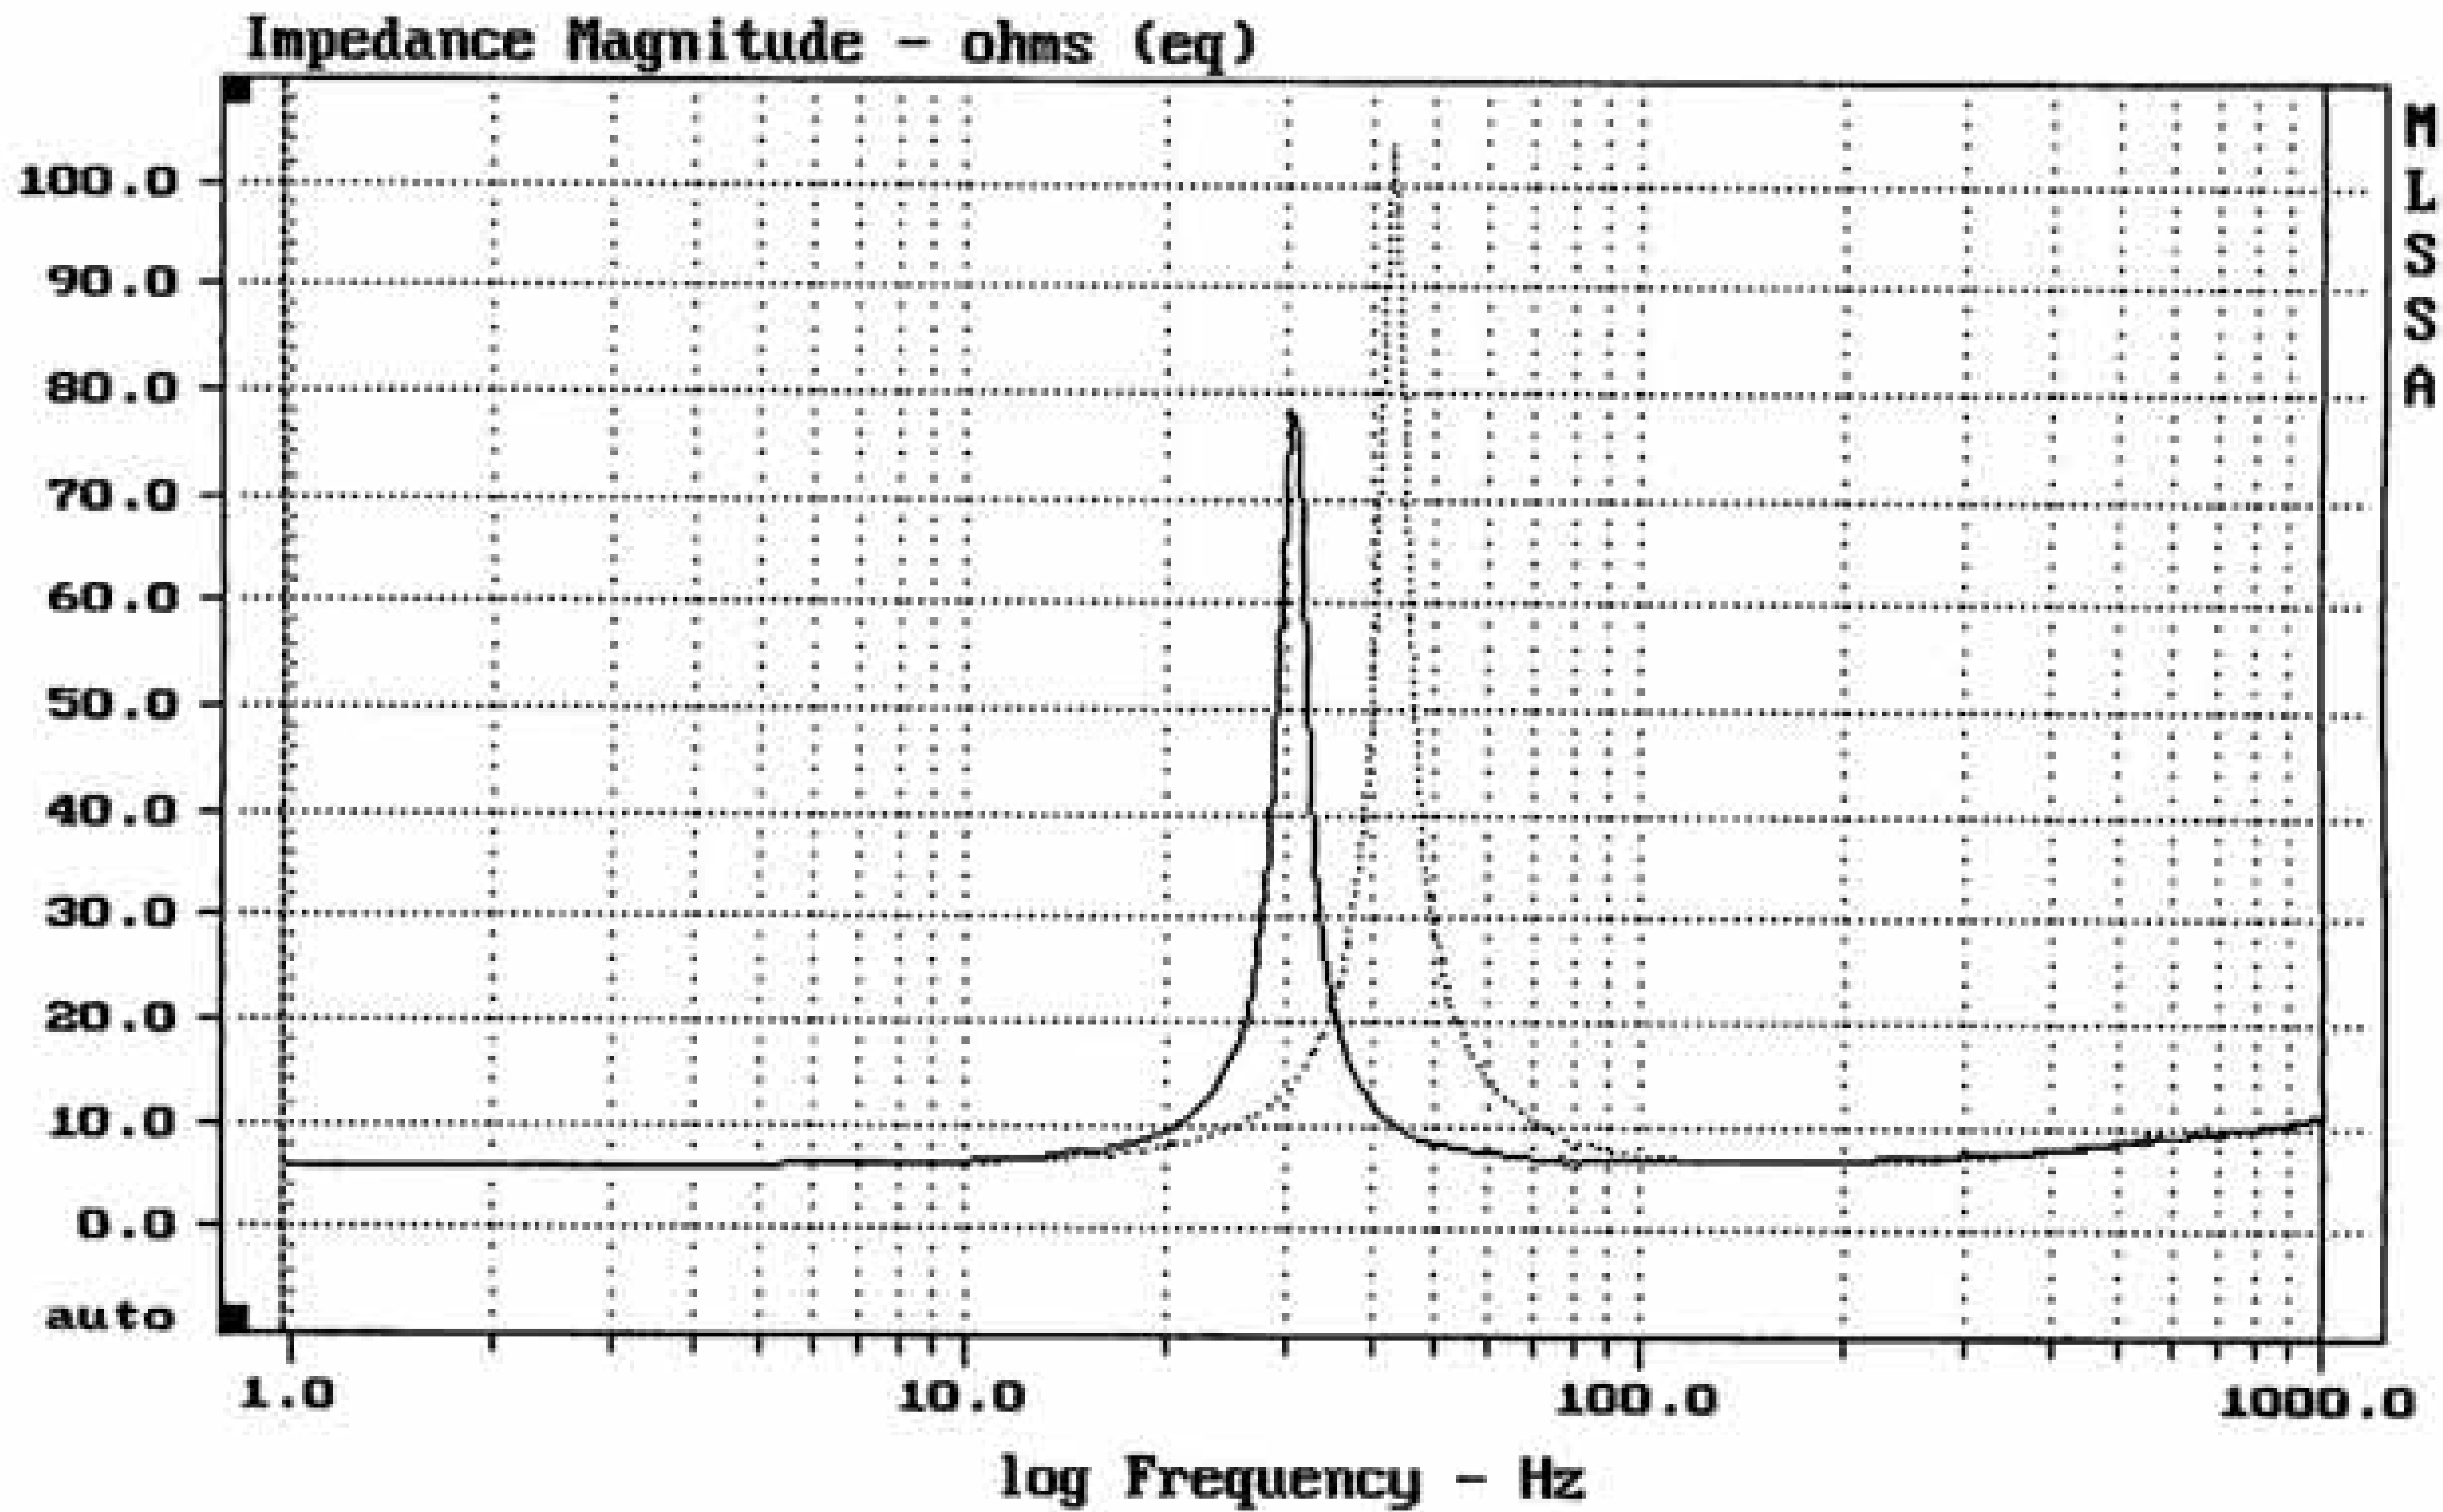

mean: 9.438, rms: 11.44, std: 6.456, max: 103.6, min: 5.983

DITO

MLSSA: Frequency Domain