

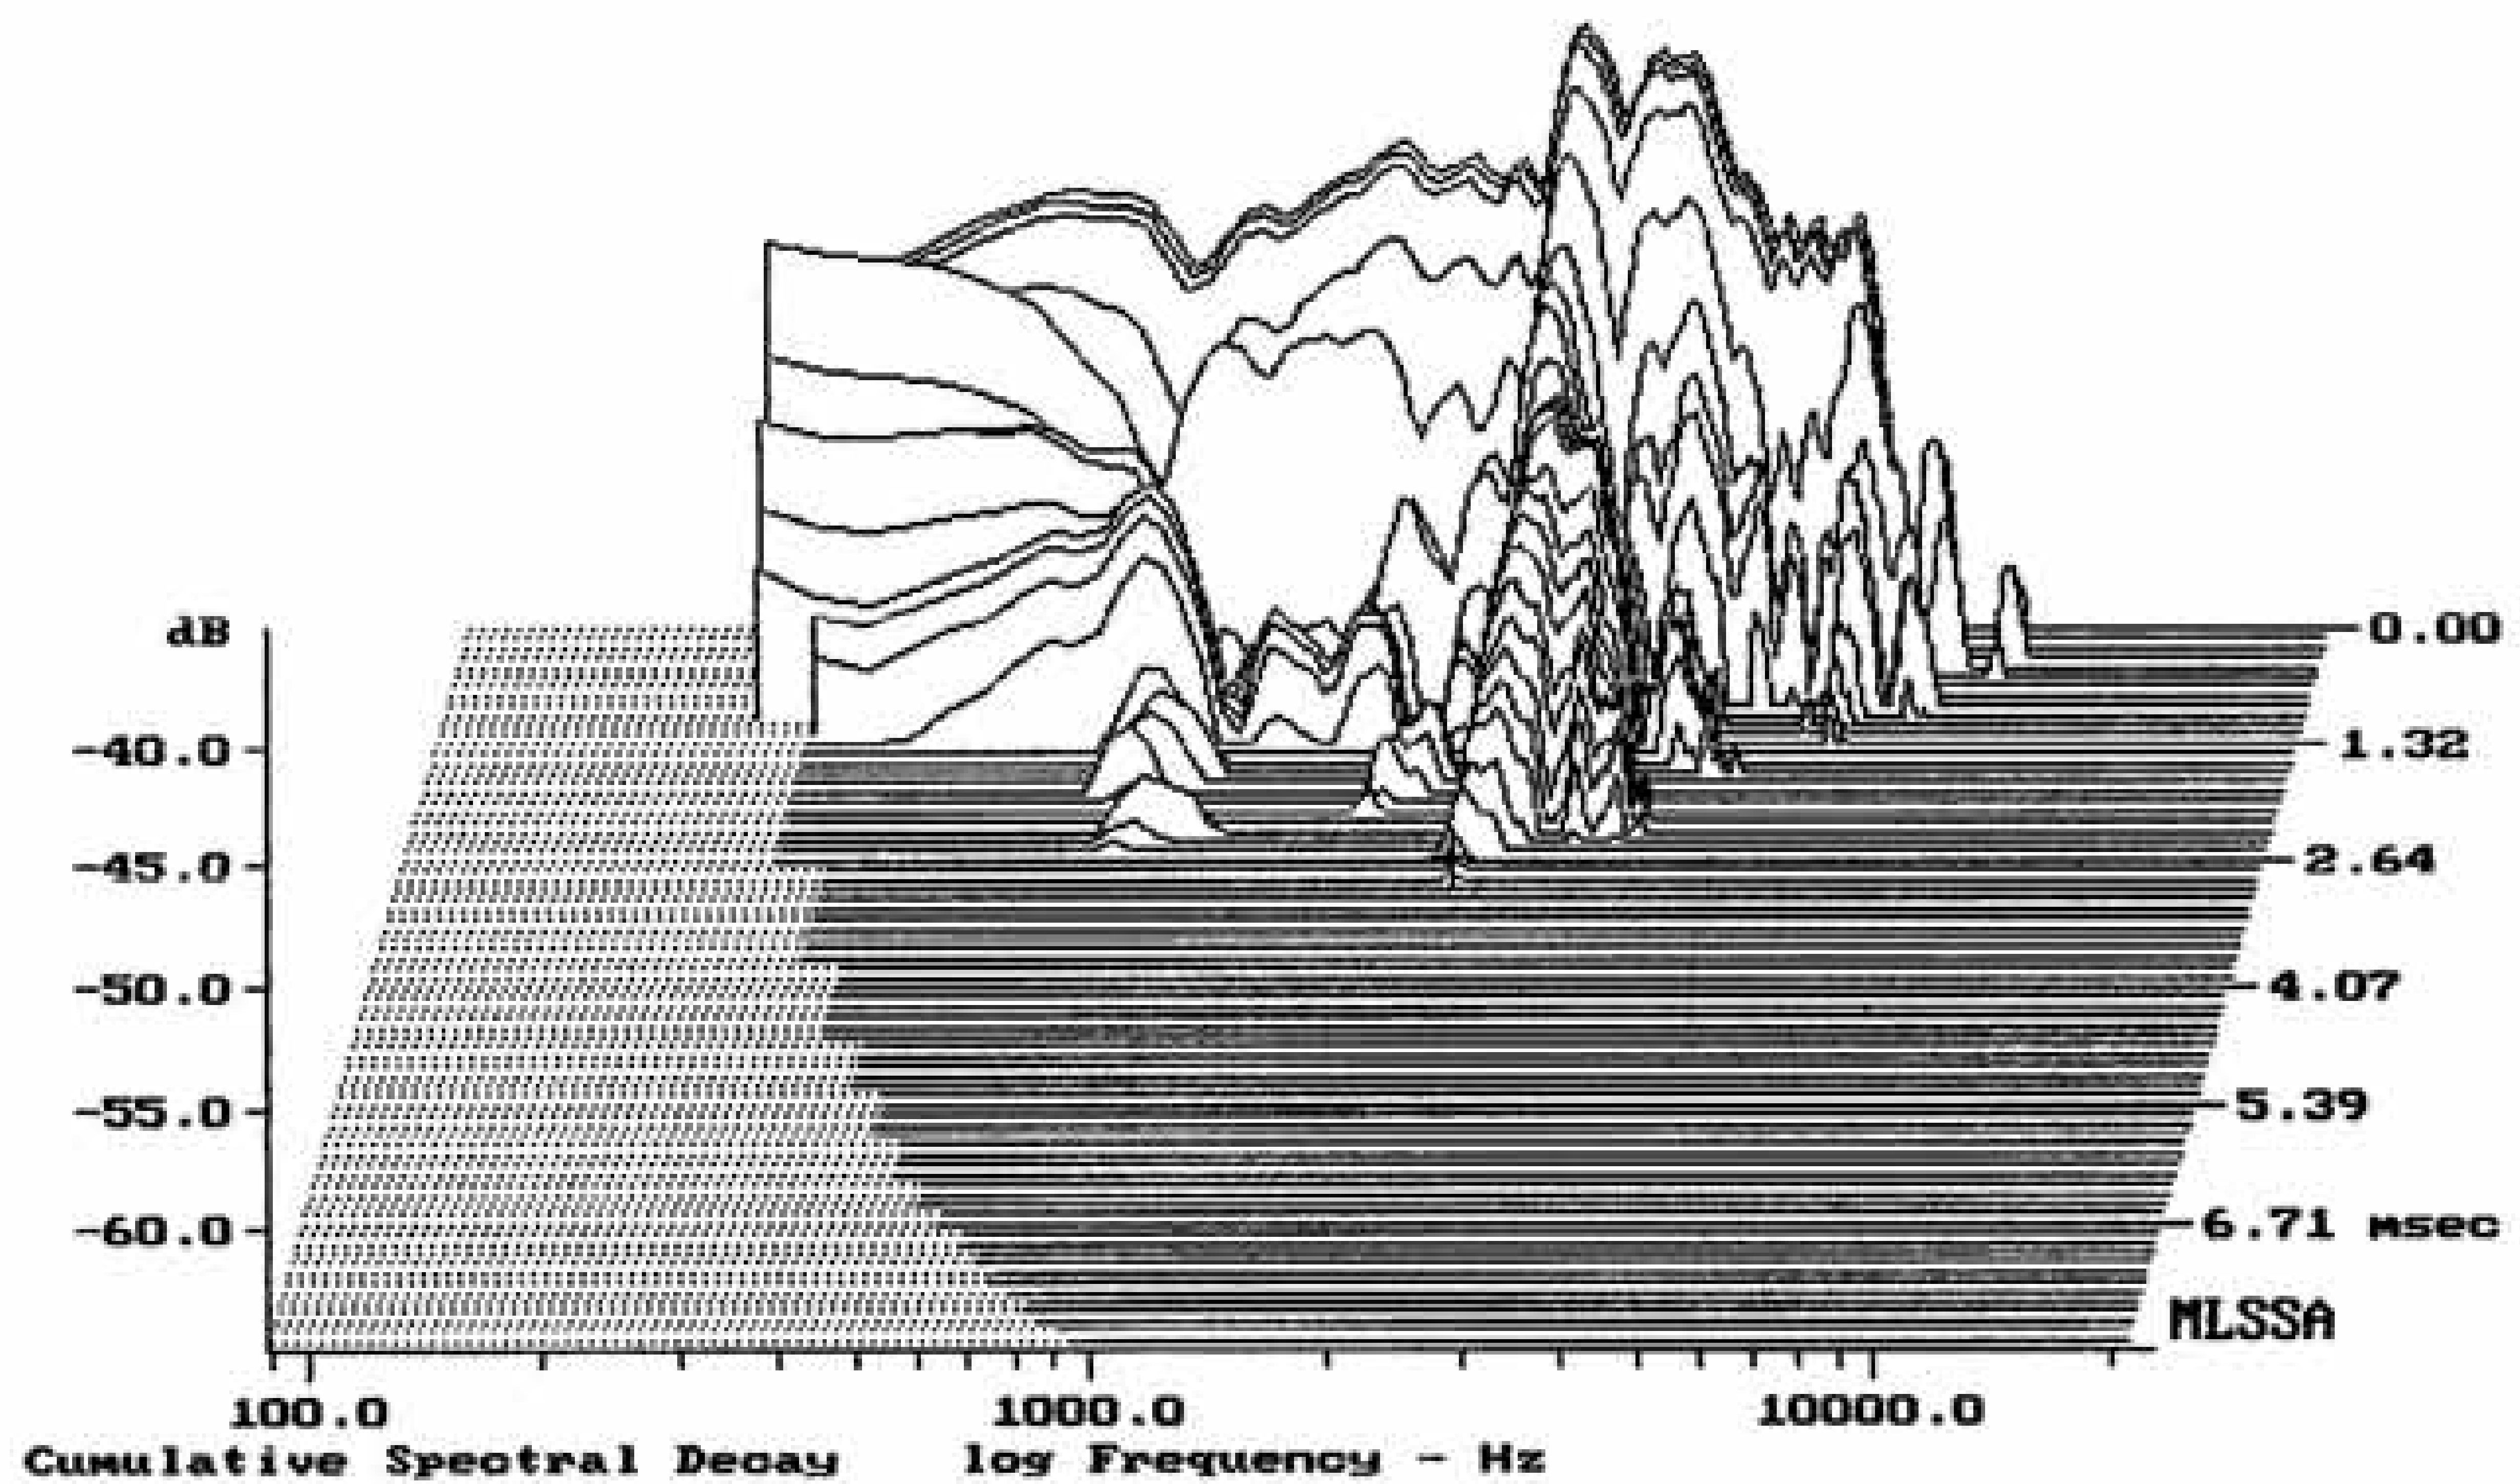

---

Level (100:5604 Hz) = 99.54 dB SPL/watt (8 ohms, @1.00 meters)

---

SELENIUM G12M

MLSSA: Frequency Domain



-64.51 dB, 1953 Hz (44), 2.750 msec (26)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.74	Ohms
2	Fs	67.53	Hz
3	Re	6.54	Ohms[dc]
4	Res	136.07	Ohms
5	Qms	12.32	
6	Qes	0.59	
7	Qts	0.57	
8	L1	0.22	mH
9	L2	0.85	mH
10	R2	6.58	Ohms
11	RMSE-load	0.59	Ohms
12	Vas(Sd)	70.15	liters
13	Mms	27.80	grams
14	Cms	200	$\mu\text{M}/\text{Newton}$
15	B1	11.41	Tesla-M
16	SPLref(Sd)	97.4	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (40.00 grams)

Area (Sd): 500.00 sq cm

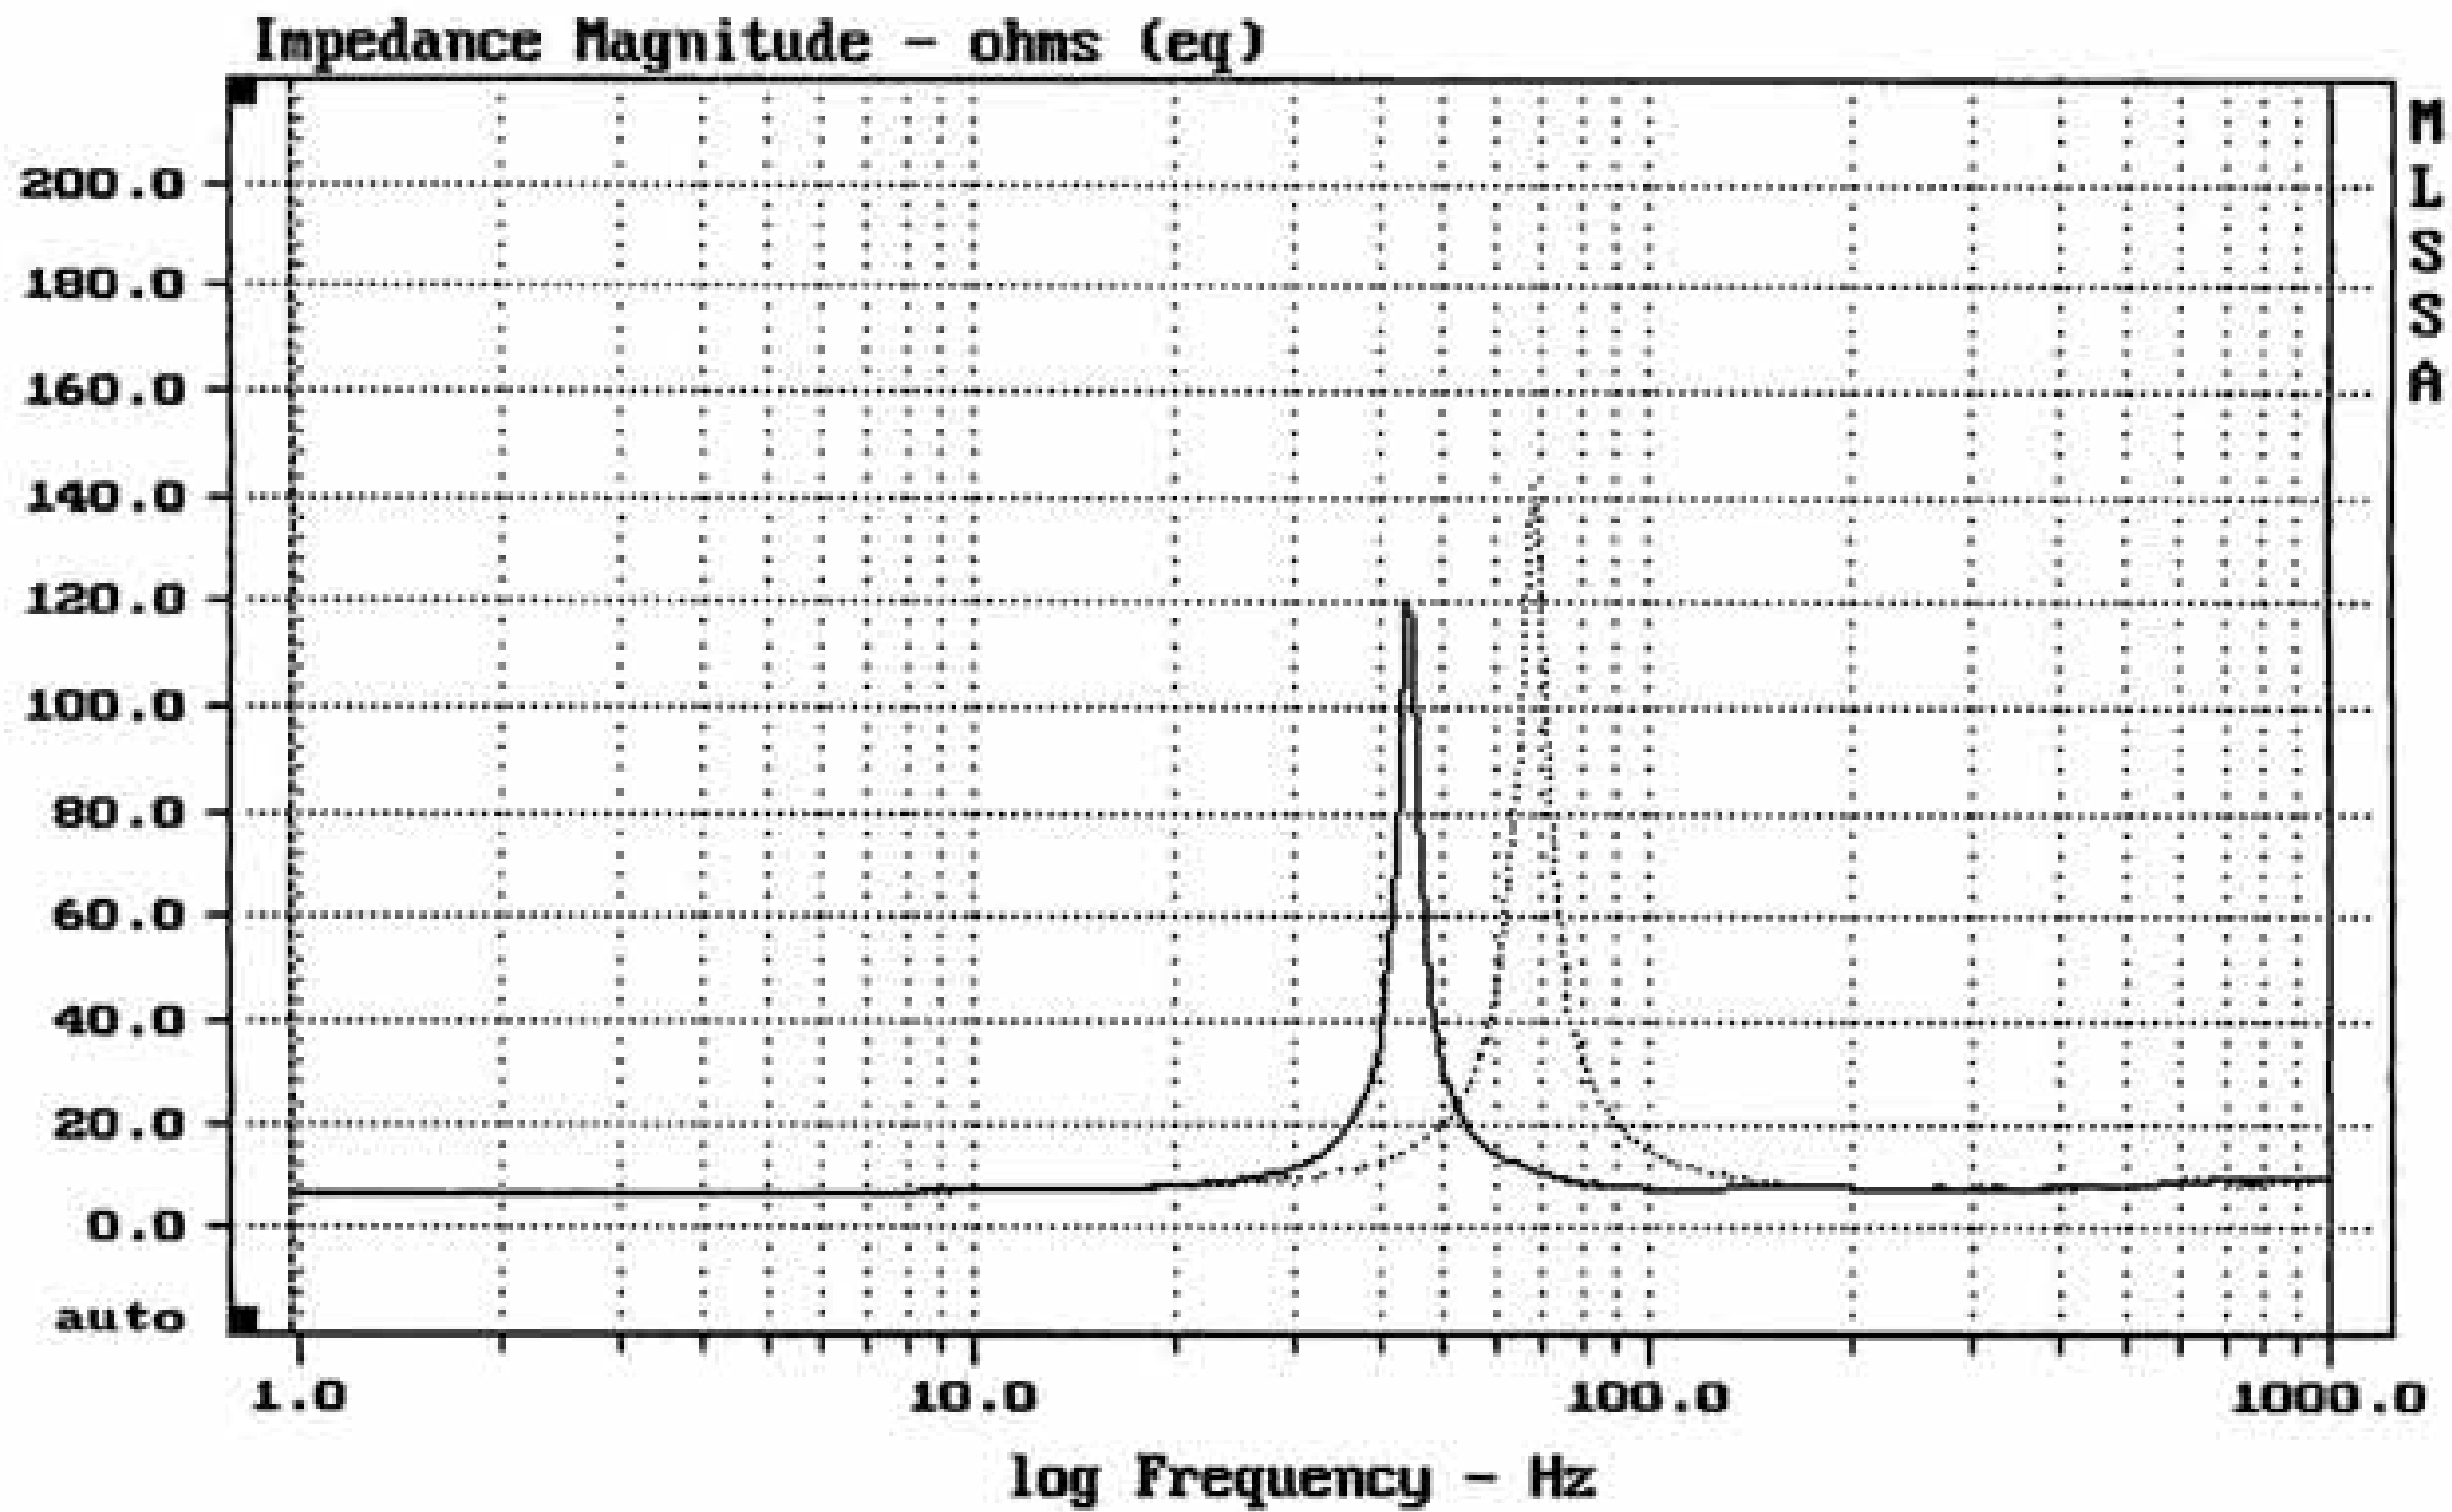
DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -34.4% (-20% to -50% is recommended).

SELENIUM G12M

MLSSA: Parameters



mean: 10.47, rms: 15.39, std: 11.28, max: 142.4, min: 6.582

DTTO

MLSSA: Frequency Domain