


Level (89:5504 Hz) = 97.81 dB SPL/watt (8 ohms, @1.00 meters)

SELENIUM 12CV3

MLSSA: Frequency Domain

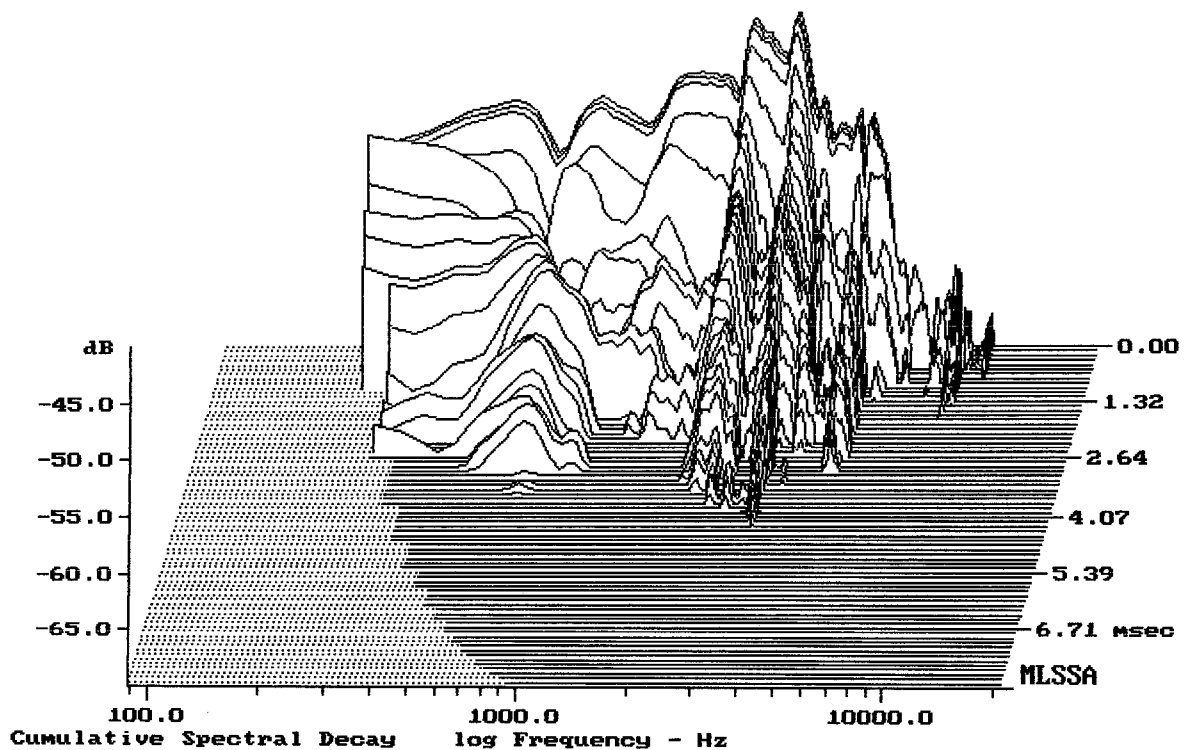

-69.02 dB, 3240 Hz (73), 4.180 msec (39)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.60	Ohms
2	Fs	66.23	Hz
3	Re	5.78	Ohms[dc]
4	Res	81.97	Ohms
5	Qms	12.97	
6	Qes	0.91	
7	Qts	0.85	
8	L1	0.45	mH
9	L2	0.61	mH
10	R2	2.11	Ohms
11	RMSE-load	0.64	Ohms
12	Vas(Sd)	76.23	liters
13	Mms	27.75	grams
14	Cms	208	$\mu\text{M}/\text{Newton}$
15	Bl	8.54	Tesla-M
16	SPLref(Sd)	95.7	dB[Re]
17	Rub-index	0.13	

Method: Mass-loaded (40.00 grams)

Area (Sd): 510.71 sq cm


DCR mode: Measure (-0.10 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -33.0% (-20% to -50% is recommended).

SELENIUM 12CV3

MLSSA: Parameters

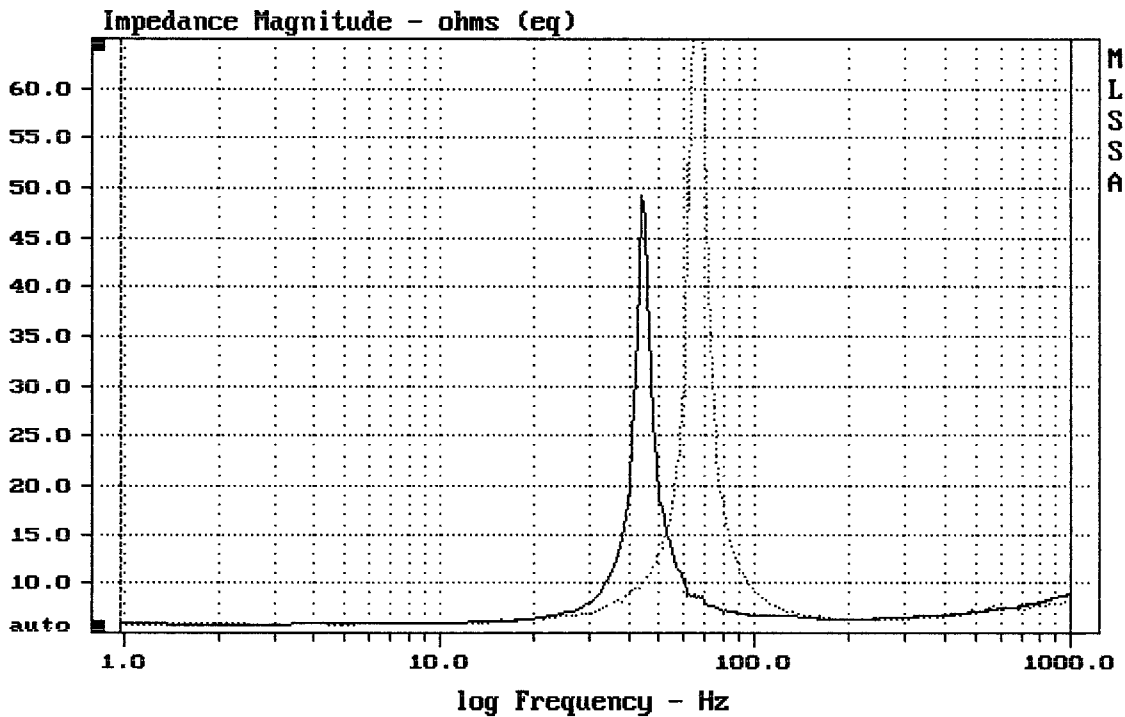

mean: 8.255, rms: 10.49, std: 6.471, max: 85.77, min: 5.795

MLSSA: Frequency Domain