


Level (100:2200 Hz) = 96.73 dB SPL/watt (8 ohms, @1.00 meters)

SELENIUM 12W10P-ND/SLF

MLSSA: Frequency Domain

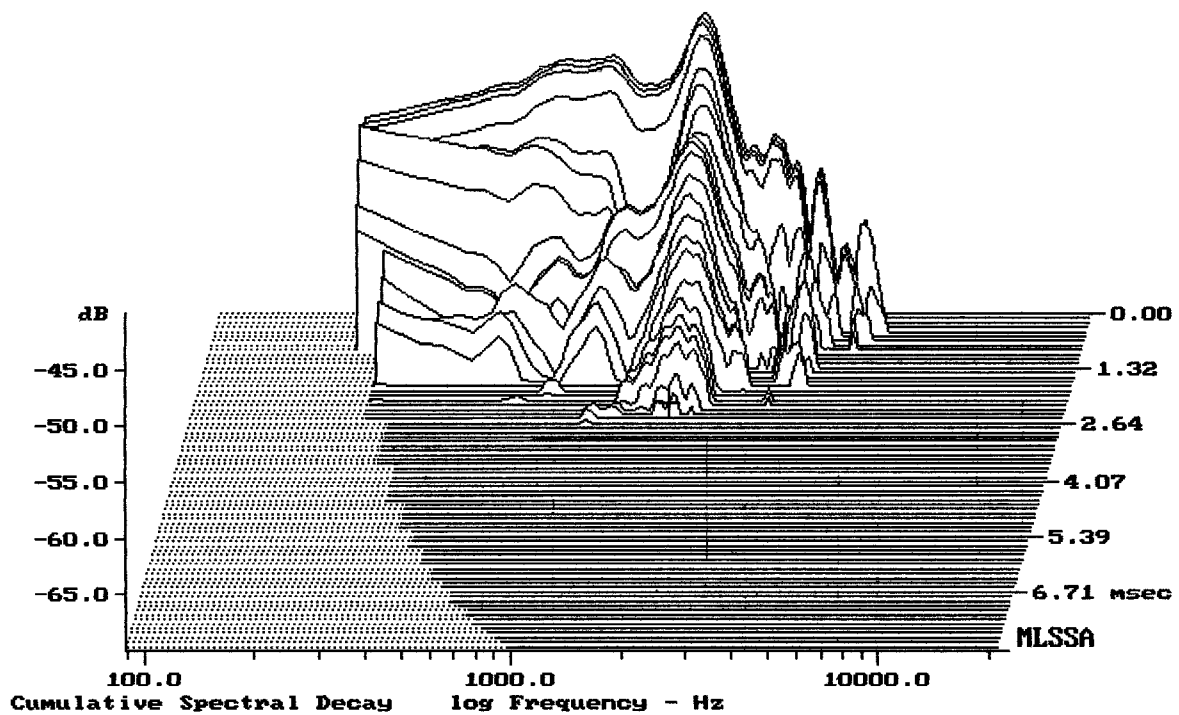

-69.04 dB, 1776 Hz (40), 2.420 msec (23)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.82	Ohms
2	Fs	55.69	Hz
3	Re	5.41	Ohms[dc]
4	Res	150.34	Ohms
5	Qms	11.73	
6	Qes	0.42	
7	Qts	0.41	
8	L1	0.74	mH
9	L2	1.40	mH
10	R2	4.82	Ohms
11	RMSE-load	0.64	Ohms
12	Vas(Sd)	64.87	liters
13	Mms	46.13	grams
14	Cms	177	$\mu\text{M}/\text{Newton}$
15	B1	14.39	Tesla-M
16	SPLref(Sd)	96.1	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 510.71 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -37.4% (-20% to -50% is recommended).

12W10P-ND/SLF

MLSSA: Parameters

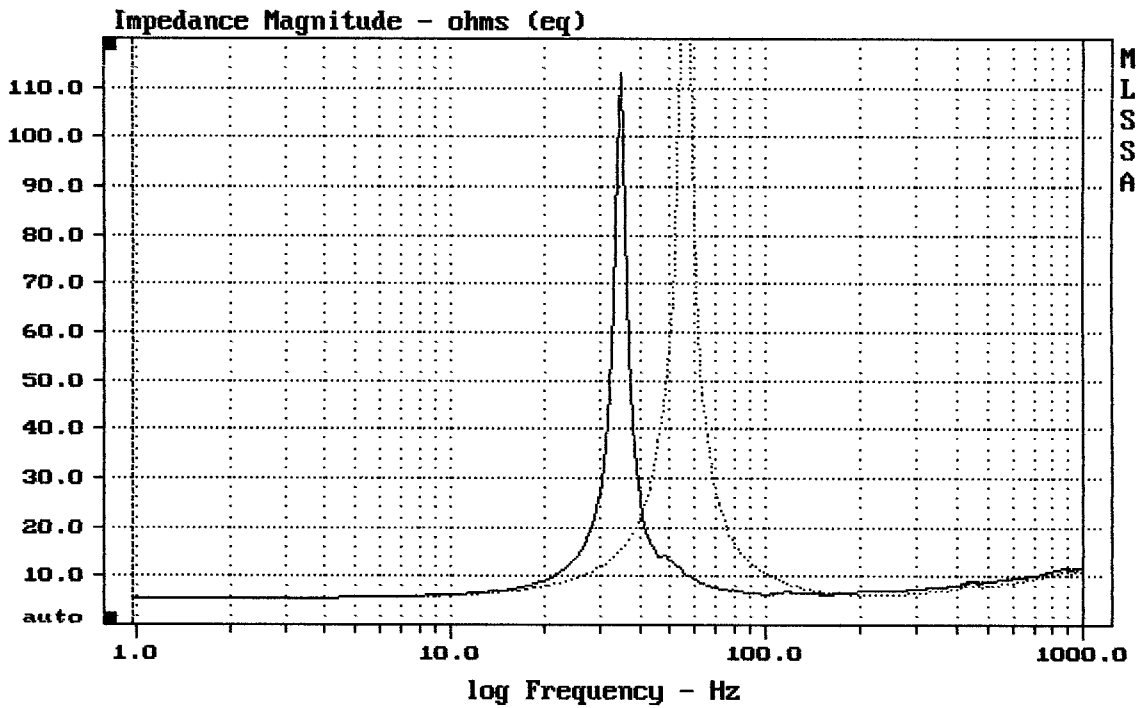

mean: 10.51, rms: 15.63, std: 11.56, max: 158.3, min: 5.464

MLSSA: Frequency Domain