


Level (100:4006 Hz) = 97.42 dB SPL/watt (8 ohms, @1.00 meters)

SELENIUM 12W12P-Nd

MLSSA: Frequency Domain

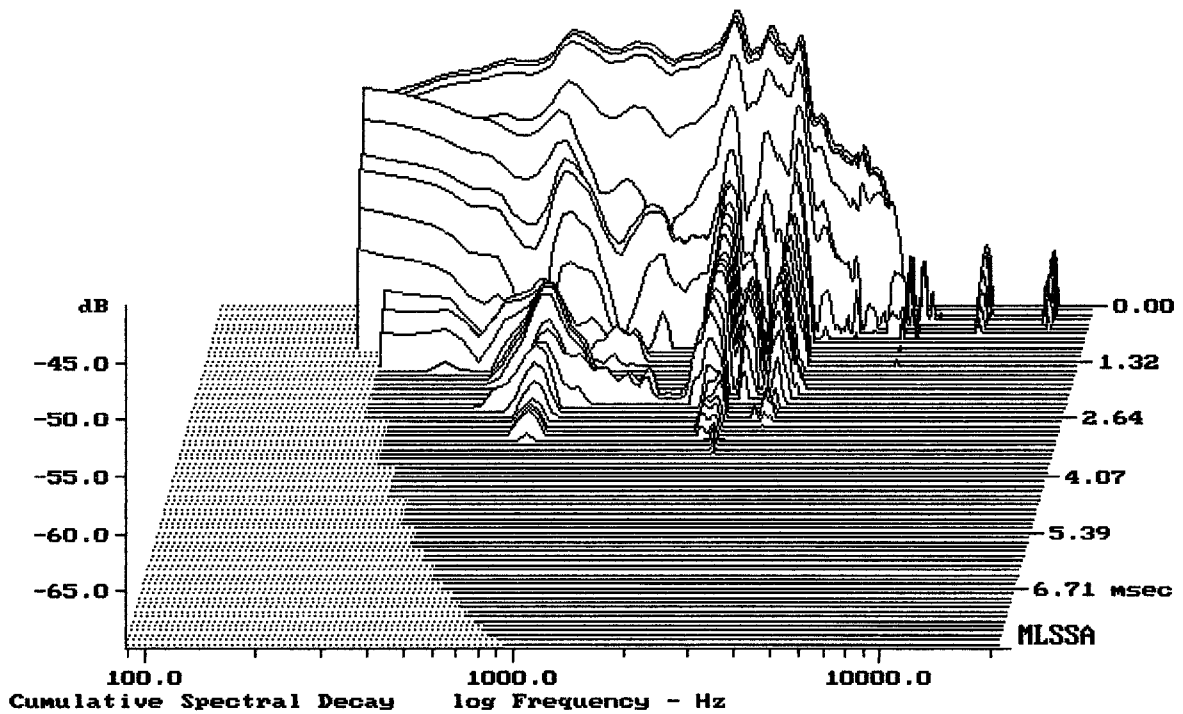

-69.53 dB, 2486 Hz (56), 3.300 msec (31)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.51	Ohms
2	Fs	52.72	Hz
3	Re	5.63	Ohms[dc]
4	Res	87.93	Ohms
5	Qms	10.44	
6	Qes	0.67	
7	Qts	0.63	
8	L1	0.17	mH
9	L2	0.82	mH
10	R2	8.64	Ohms
11	RMSE-load	0.42	Ohms
12	Vas(Sd)	90.51	liters
13	Mms	36.89	grams
14	Cms	247	$\mu$ M/Newton
15	Bl	10.15	Tesla-M
16	SPLref(Sd)	94.8	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (40.00 grams)

Area (Sd): 510.71 sq cm


DCR mode: Measure (-0.12 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -28.3% (-20% to -50% is recommended).

SELENIUM 12W12P-Nd

MLSSA: Parameters

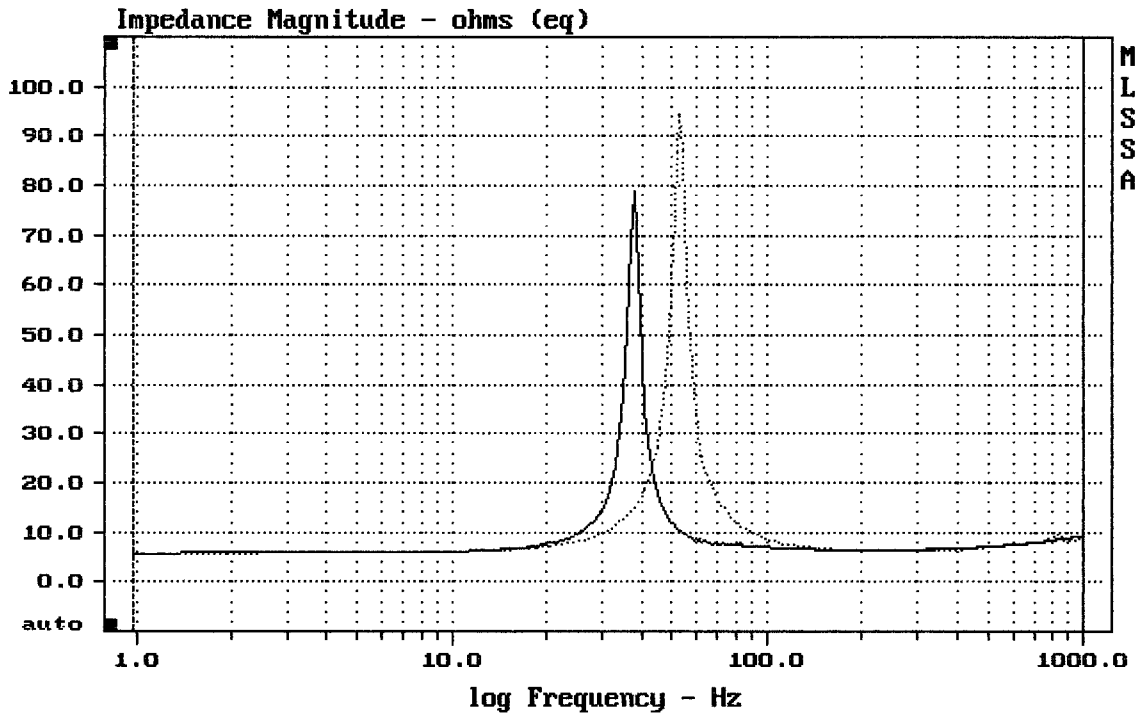

mean: 8.565, rms: 10.99, std: 6.892, max: 94.46, min: 5.706

MLSSA: Frequency Domain