


Level (100:3007 Hz) = 100.13 dB SPL/watt (8 ohms, @1.50 meters)

SELENIUM 15W10P-Nd

MLSSA: Frequency Domain

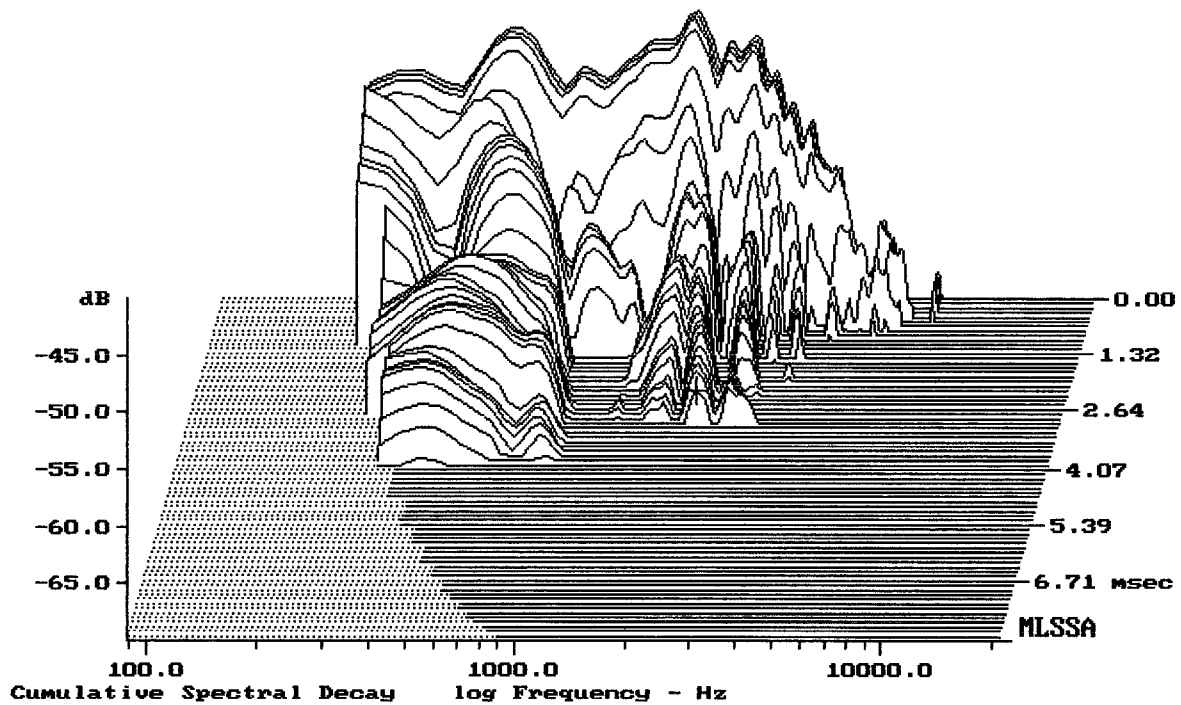

-67.19 dB, 2131 Hz (48), 2.970 msec (28)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	1.36	Ohms
2	Fs	47.70	Hz
3	Re	5.60	Ohms[dc]
4	Res	117.50	Ohms
5	Qms	8.52	
6	Qes	0.41	
7	Qts	0.39	
8	L1	0.85	mH
9	L2	1.02	mH
10	R2	4.77	Ohms
11	RMSE-load	0.93	Ohms
12	Vas(Sd)	200.08	liters
13	Mms	57.18	grams
14	Cms	195	$\mu\text{M}/\text{Newton}$
15	Bl	15.38	Tesla-M
16	SPLref(Sd)	99.1	dB[Re]
17	Rub-index	0.05	

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.12 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -28.5% (-20% to -50% is recommended).

SELENIUM 15W10P-Nd

MLSSA: Parameters

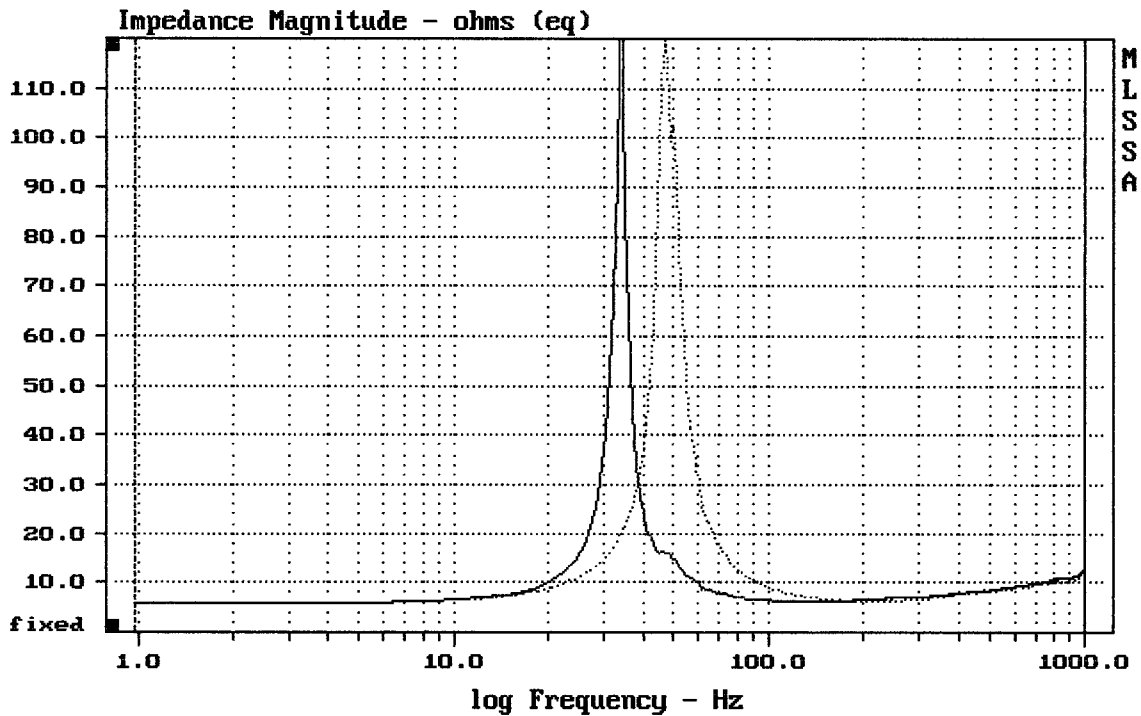

mean: 10.18, rms: 14.16, std: 9.845, max: 119.7, min: 5.704

MLSSA: Frequency Domain