


Level (100:2500 Hz) = 92.14 dB SPL/watt (8 ohms, @1.00 meters)

SA1203 OPR.

MLSSA: Frequency Domain

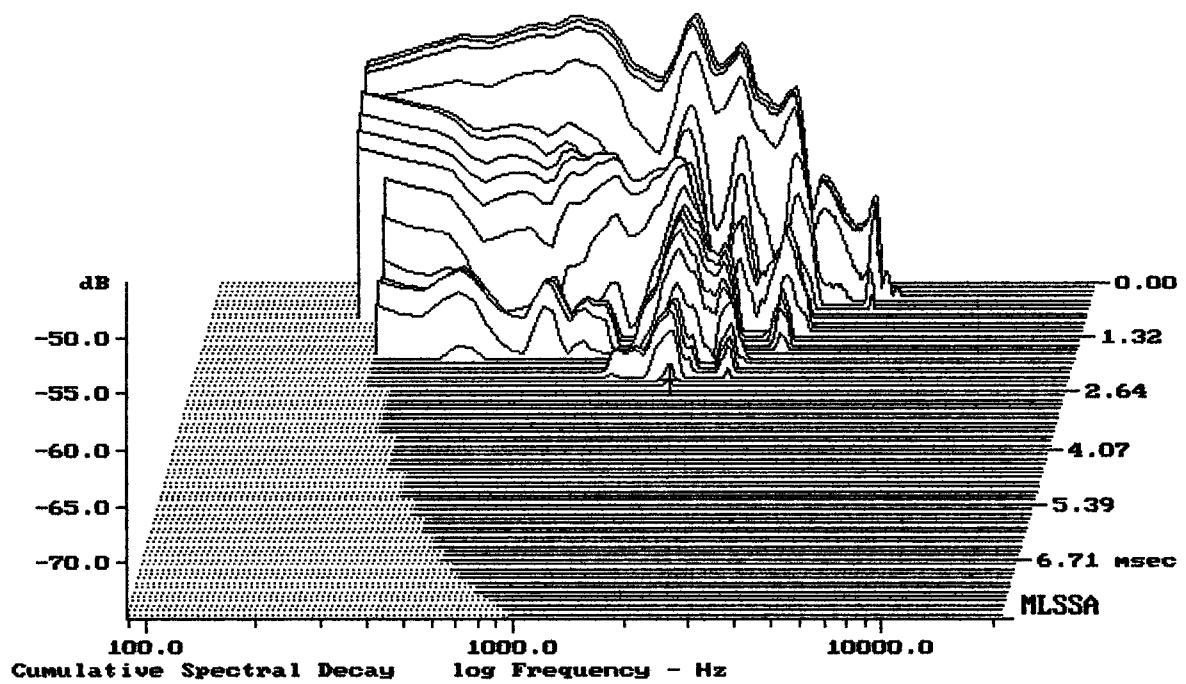

-74.51 dB, 1776 Hz (40), 2.530 msec (24)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.45	Ohms
2	Fs	32.56	Hz
3	Re	5.79	Ohms[dc]
4	Res	44.77	Ohms
5	Qms	2.23	
6	Qes	0.29	
7	Qts	0.26	
8	L1	0.86	mH
9	L2	1.05	mH
10	R2	7.59	Ohms
11	RMSE-load	0.75	Ohms
12	Vas(Sd)	110.53	liters
13	Mms	85.56	grams
14	Cms	279	$\mu\text{M}/\text{Newton}$
15	B1	18.75	Tesla-M
16	SPLref(Sd)	93.0	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.08 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -24.9% (-20% to -50% is recommended).

SA1203 OPR.

MLSSA: Parameters

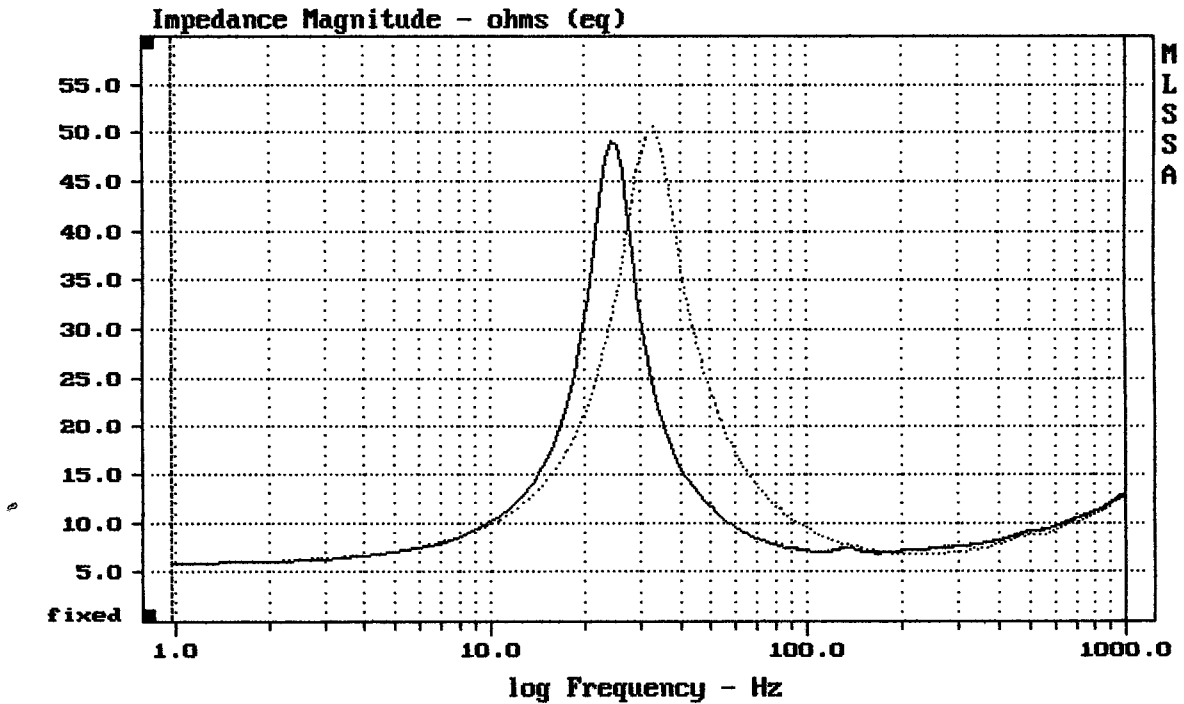

mean: 10.3, rms: 11.61, std: 5.357, max: 50.6, min: 5.929

MLSSA: Frequency Domain