

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.68	Ohms
2	Fs	54.12	Hz
3	Re	6.49	Ohms[dc]
4	Res	66.82	Ohms
5	Qms	6.21	
6	Qes	0.60	
7	Qts	0.55	
8	L1	0.32	mH
9	L2	1.13	mH
10	R2	7.68	Ohms
11	RMSE-load	0.40	Ohms
12	Vas(Sd)	241.98	liters
13	Mms	34.54	grams
14	Cms	250	$\mu\text{M}/\text{Newton}$
15	B1	11.24	Tesla-M
16	SPLref(Sd)	99.9	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (80.00 grams)

Area (Sd): 829.58 sq cm


DCR mode: Measure (-0.26 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -38.9% (-20% to -50% is recommended).


FANE STUDIO 15B

MLSSA: Parameters

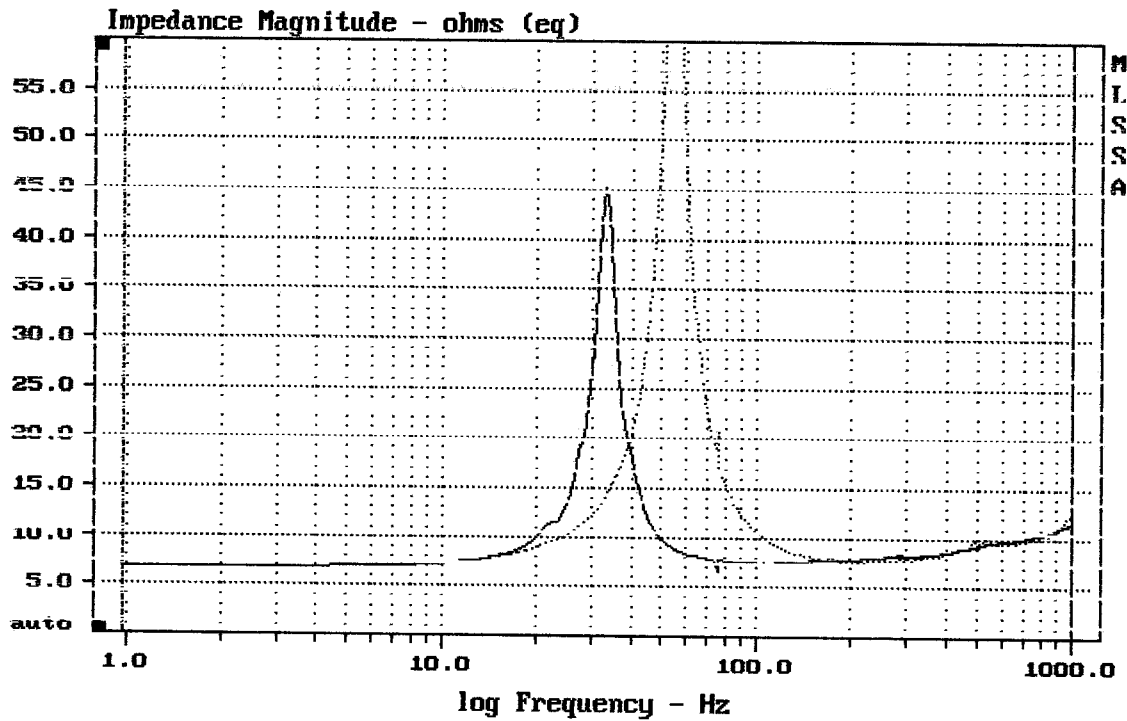

CURSOR: dy = 0.587388 x = 1000.9766 (1025)

MLSSA: Frequency Domain

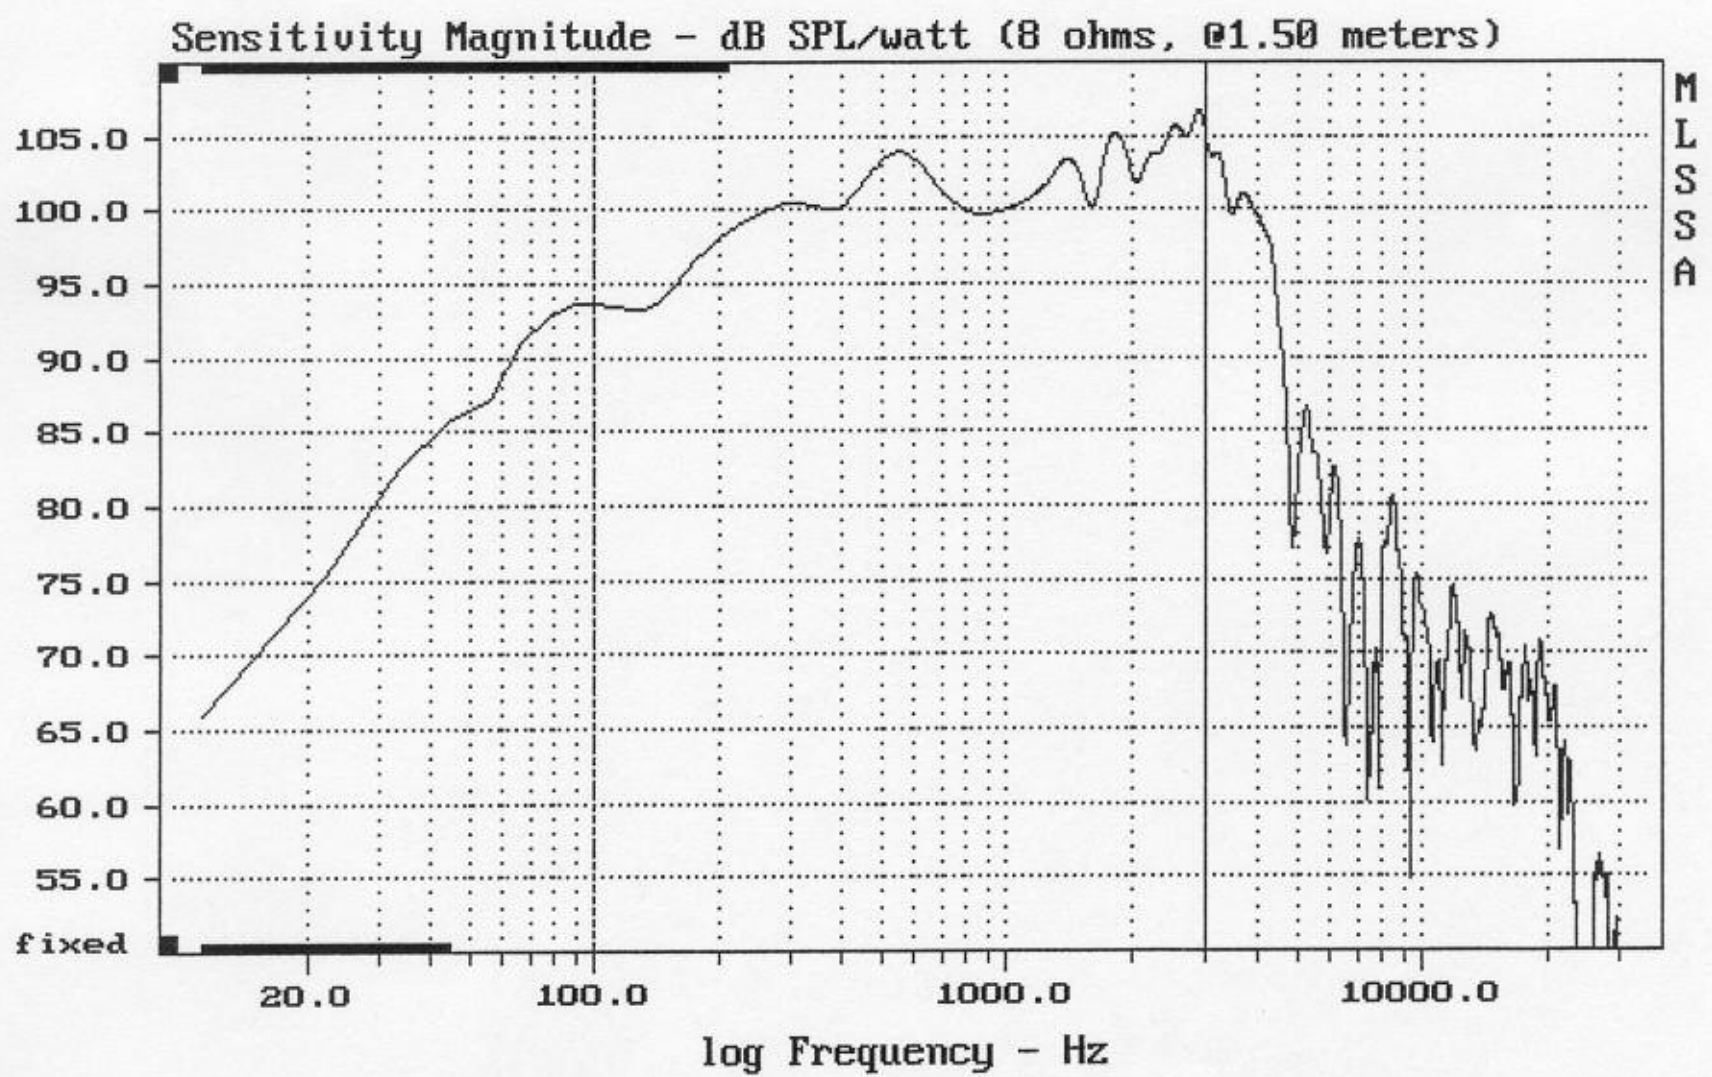

Level (100:2996 Hz) = 101.35 dB SPL/watt (8 ohms, @1.50 meters)

FANE STUDIO 15B