


Level (100:5005 Hz) = 97.31 dB SPL/watt (15 ohms, @1.50 meters)

AR0932

MLSSA: Frequency Domain

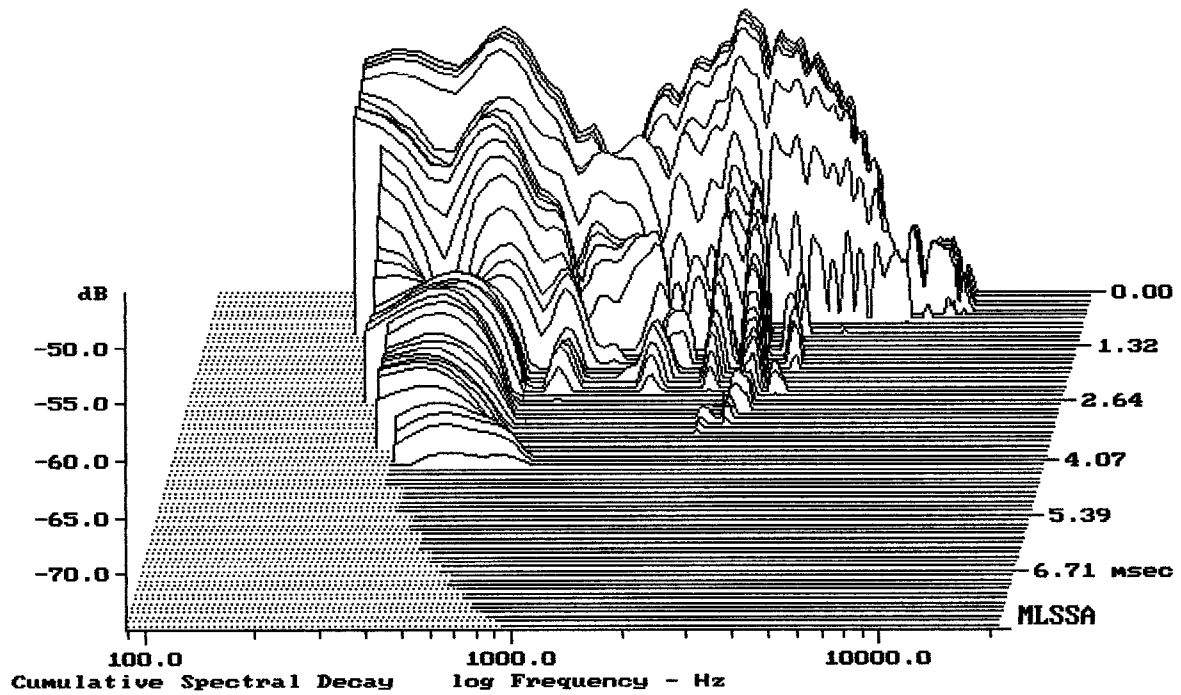

-73.90 dB, 2619 Hz (59), 3.080 msec (29)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	4.04	Ohms
2	Fs	39.28	Hz
3	Re	14.05	Ohms[dc]
4	Res	764.48	Ohms
5	Qms	10.43	
6	Qes	0.19	
7	Qts	0.19	
8	L1	2.73	mH
9	L2	5.37	mH
10	R2	15.93	Ohms
11	RMSE-load	2.70	Ohms
12	Vas(Sd)	282.43	liters
13	Mms	59.71	grams
14	Cms	275	$\mu\text{M}/\text{Newton}$
15	B1	32.87	Tesla-M
16	SPLref(Sd)	101.3	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (60.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -25.1% (-20% to -50% is recommended).

ARO932

MLSSA: Parameters

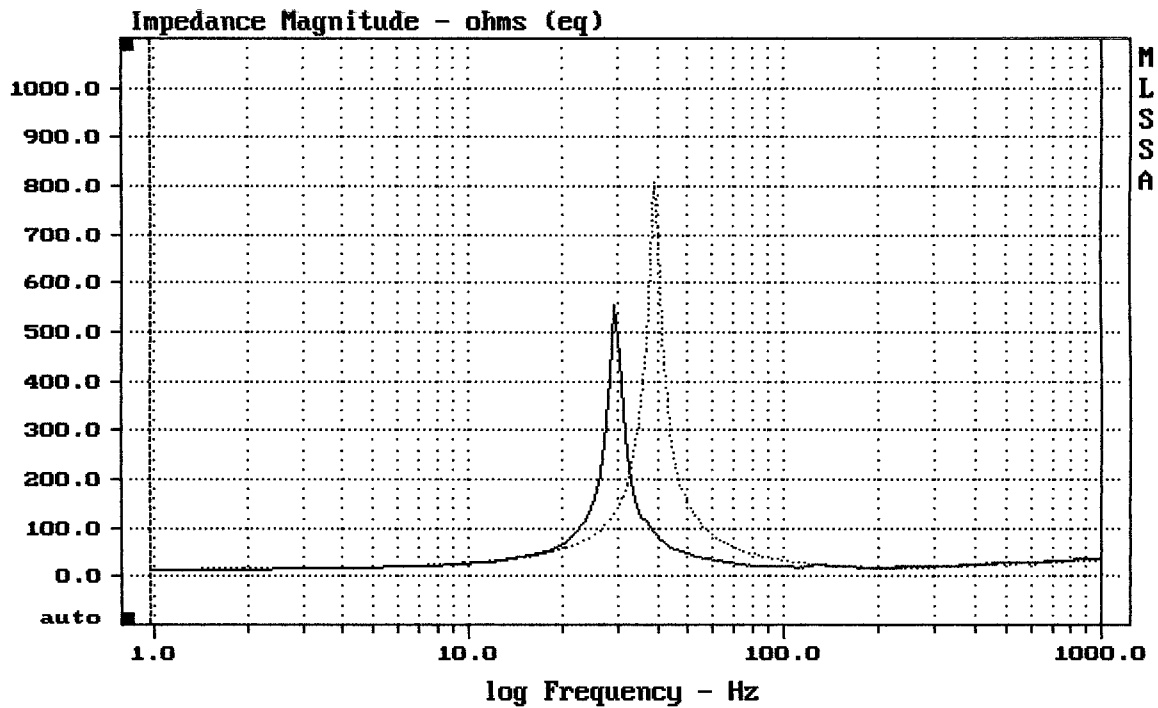

mean: 35.19, rms: 64.28, std: 53.79, max: 807.6, min: 14.46

MLSSA: Frequency Domain