


Level (100:3906 Hz) = 97.66 dB SPL/watt (8 ohms, @1.50 meters)

WPU1505-X

MLSSA: Frequency Domain

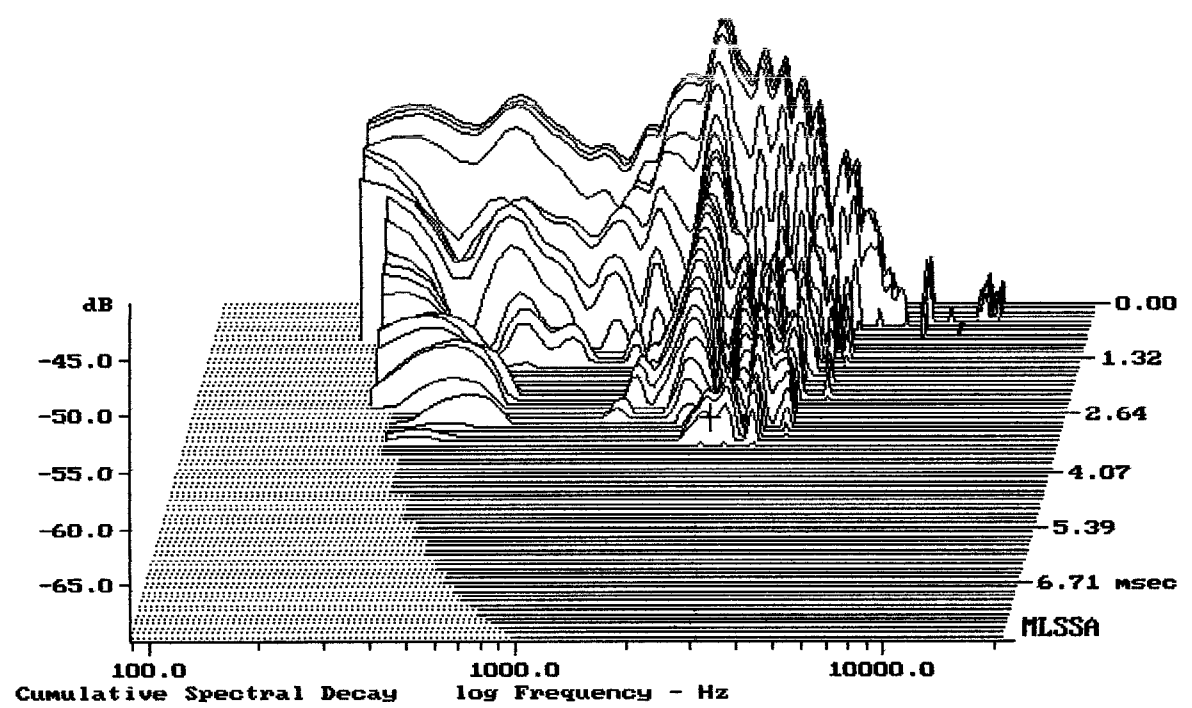

-67.94 dB, 2397 Hz (54), 3.300 msec (31)

Line	Parameter	Value	Units
1	RMSE-free	0.54	Ohms
2	Fs	46.54	Hz
3	Re	5.46	Ohms[dc]
4	Res	140.16	Ohms
5	Qms	15.25	
6	Qes	0.59	
7	Qts	0.57	
8	L1	0.65	mH
9	L2	1.42	mH
10	R2	2.89	Ohms
11	RMSE-load	0.30	Ohms
12	Vas(Sd)	128.73	liters
13	Mms	87.79	grams
14	Cms	133	$\mu\text{M}/\text{Newton}$
15	Bl	15.36	Tesla-M
16	SPLref(Sd)	95.2	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 829.58 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -25.9% (-20% to -50% is recommended).

WPU1505-X

MLSSA: Parameters

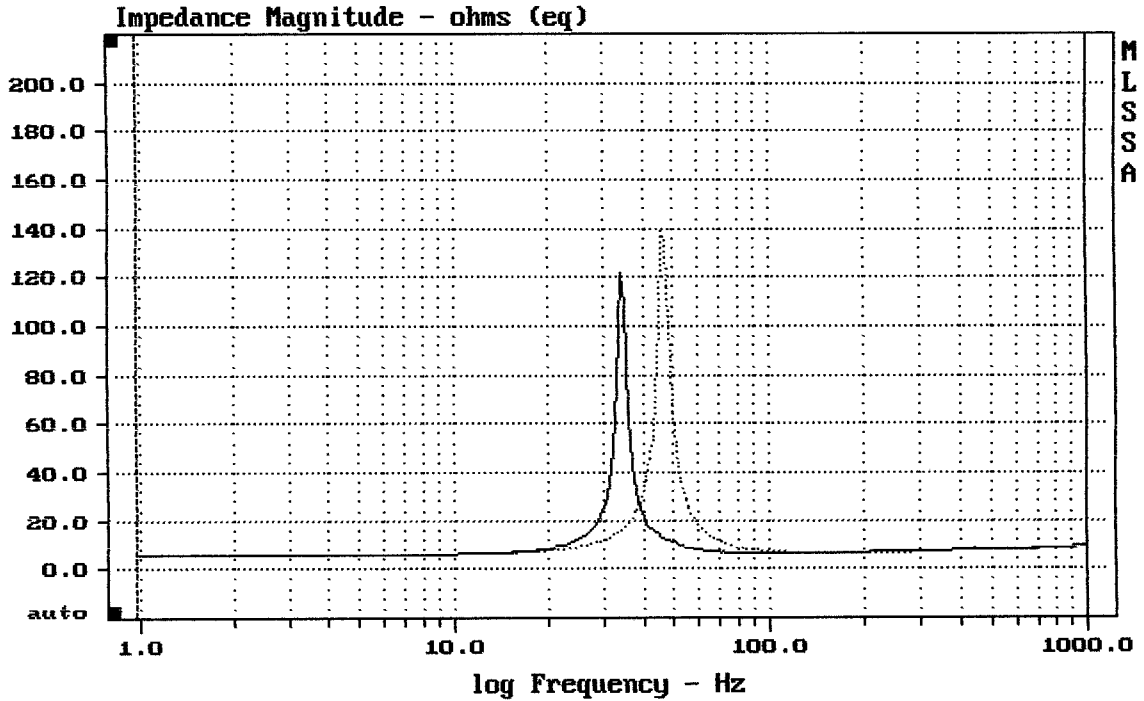

mean: 9.152, rms: 12.66, std: 8.753, max: 138.9, min: 5.518

MLSSA: Frequency Domain