


Level (67:2020 Hz) = 95.53 dB SPL/watt (4 ohms, @1.50 meters)

SELENIUM WPU1809 4ohm

MLSSA: Frequency Domain

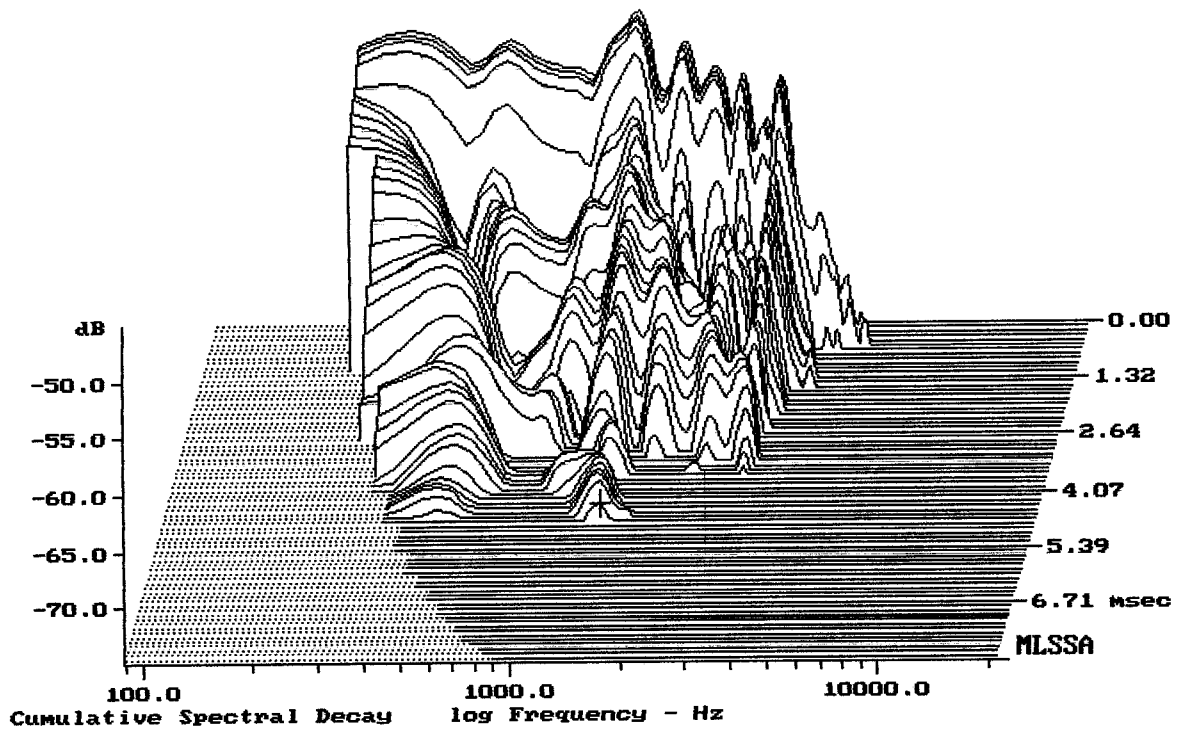

-73.41 dB, 1376 Hz (31), 4.730 msec (44)

Measured Data			QC Limits
Line	Parameter	Value	Units
1	RMSE-free	0.52	Ohms
2	Fs	32.84	Hz
3	Re	3.33	Ohms[dc]
4	Res	127.71	Ohms
5	Qms	16.35	
6	Qes	0.43	
7	Qts	0.42	
8	L1	0.86	mH
9	L2	0.99	mH
10	R2	5.29	Ohms
11	RMSE-load	0.46	Ohms
12	Vas(Sd)	324.75	liters
13	Mms	152.57	grams
14	Cms	154	μ M/Newton
15	B1	15.68	Tesla-M
16	SPLref(Sd)	96.1	dB[Re]
17	Rub-index	0.02	

Method: Mass-loaded (120.00 grams)

Area (Sd): 1225.42 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -25.2% (-20% to -50% is recommended).

WPU1809 4ohm

MLSSA: Parameters

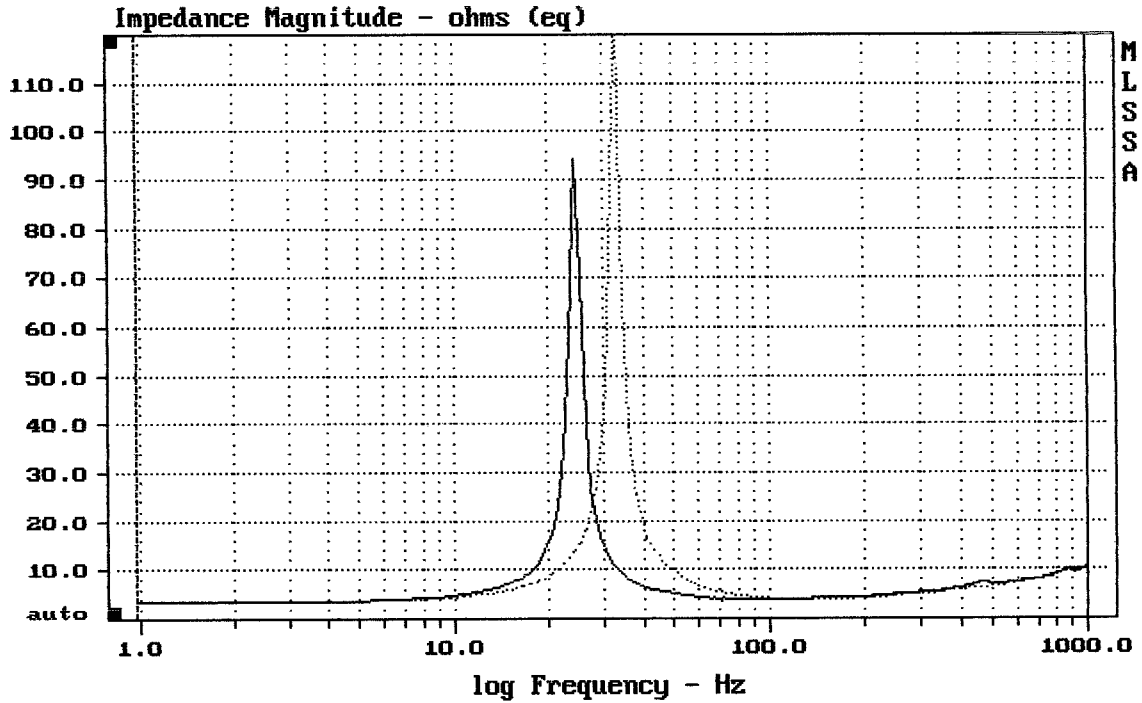

mean: 7.529, rms: 10.06, std: 6.676, max: 126.9, min: 3.416

MLSSA: Frequency Domain