

# NTG-1

Directional Condenser Microphone

**RØDE**<sup>®</sup>  
MICROPHONES




## Features

- Broadcast sound quality
- Low noise circuitry
- Condenser transducer
- Rugged metal construction
- Two step High Pass Filter (Flat/80Hz)
- Low handling noise
- Low weight - 105g (3 oz.)
- Designed and manufactured in Australia
- Full 10 year warranty\*


## Specifications

Acoustic Principle	Line Gradient	Directional Pattern	Super-Cardioid
Frequency Range	20Hz ~ 20,000Hz (selectable HPF@80Hz)	Sensitivity	-36dB $\pm$ 2dB re 1V/Pa @ 1kHz
Nominal Impedence	50 $\Omega$	Equivalent Noise	18dBA SPL (A - weighted per IEC651)
Maximum Output	+6.9dBu (@ 1% THD into 1k $\Omega$ )	Dynamic Range	121dB (per IEC651)
Maximum SPL	139dB (@ 1kHz, 1% THD into 1k $\Omega$ load)	Signal/Noise	76dB SPL (A - weighted per IEC651)
Power Req.	48V Phantom Power	Dimensions	Length - 217mm Diameter - $\varnothing$ 22mm
Output Connection	3 pin XLR, balanced output between Pin 2 (+), Pin 3 (-) and Pin 1 (ground)	Net Weight	105g

## Frequency Response

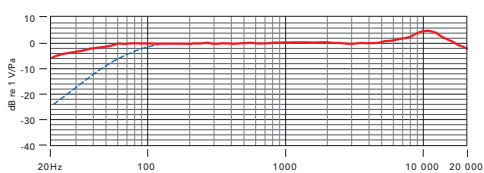

## Frequency Response



## Included Accessories

- WSVM Wind shield
- ZP1 Zip pouch
- RM5 Mic clip



[www.rodemic.com](http://www.rodemic.com)

\*After online registration

Australia  
107 Carnarvon st, Silverwater NSW 2128 Australia  
Ph: +61 2 9648 5855    Fx: +61 2 9648 2455

USA  
6385 Rose Lane, Carpinteria CA 93013 USA  
Ph: +1 805 566 7777    Fx: +1 805 566 0071