



Sensitivity Magnitude - dB SPL/watt (4 ohms, @1.75 meters)

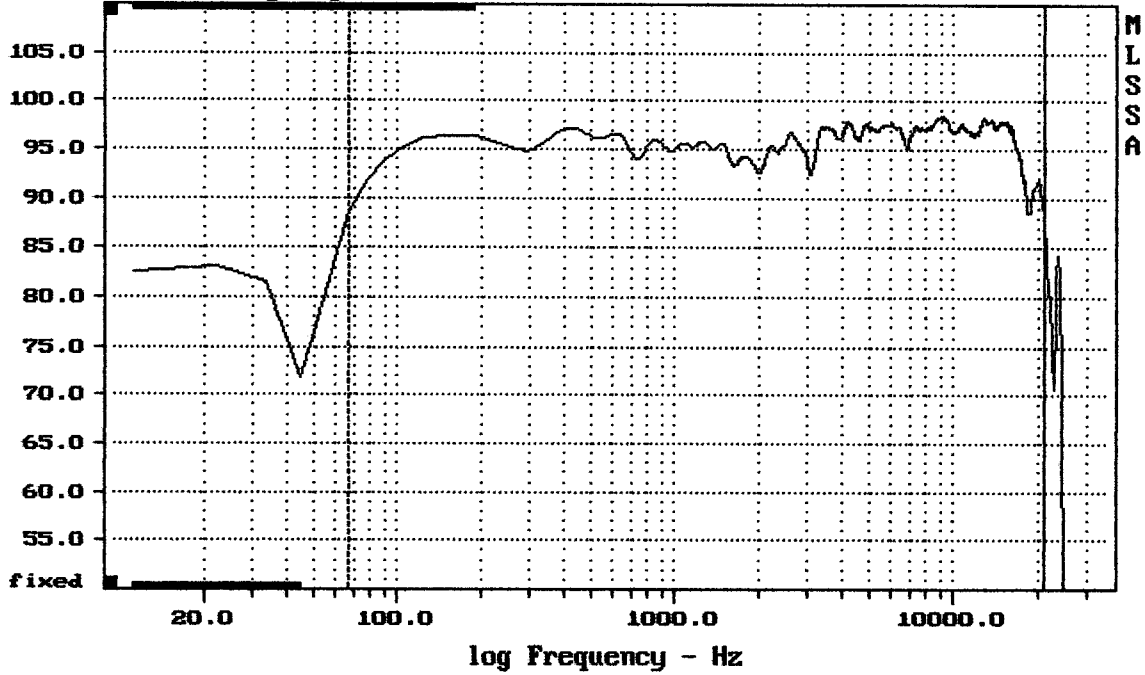

mean: 96.82, rms: 96.28, std: 1.93, max: 98.45, min: 88.50


SRM550

MLSSA: Frequency Domain

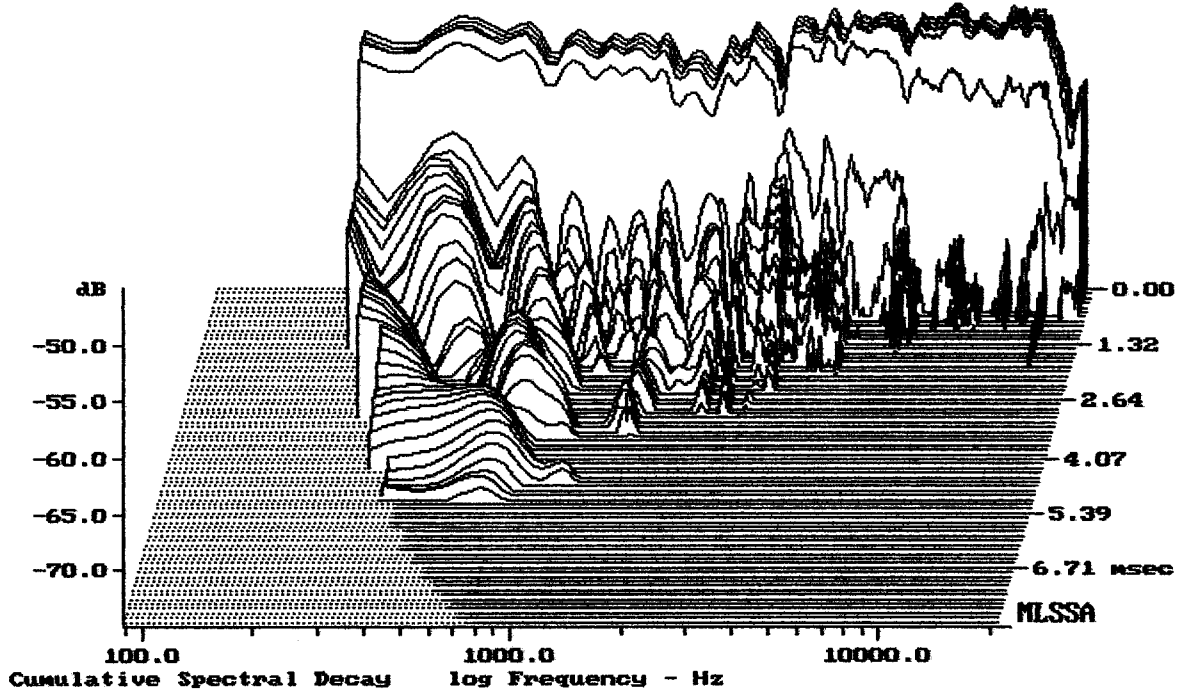

-72.88 dB, 1465 Hz (33), 3.410 msec (32)


DTTO

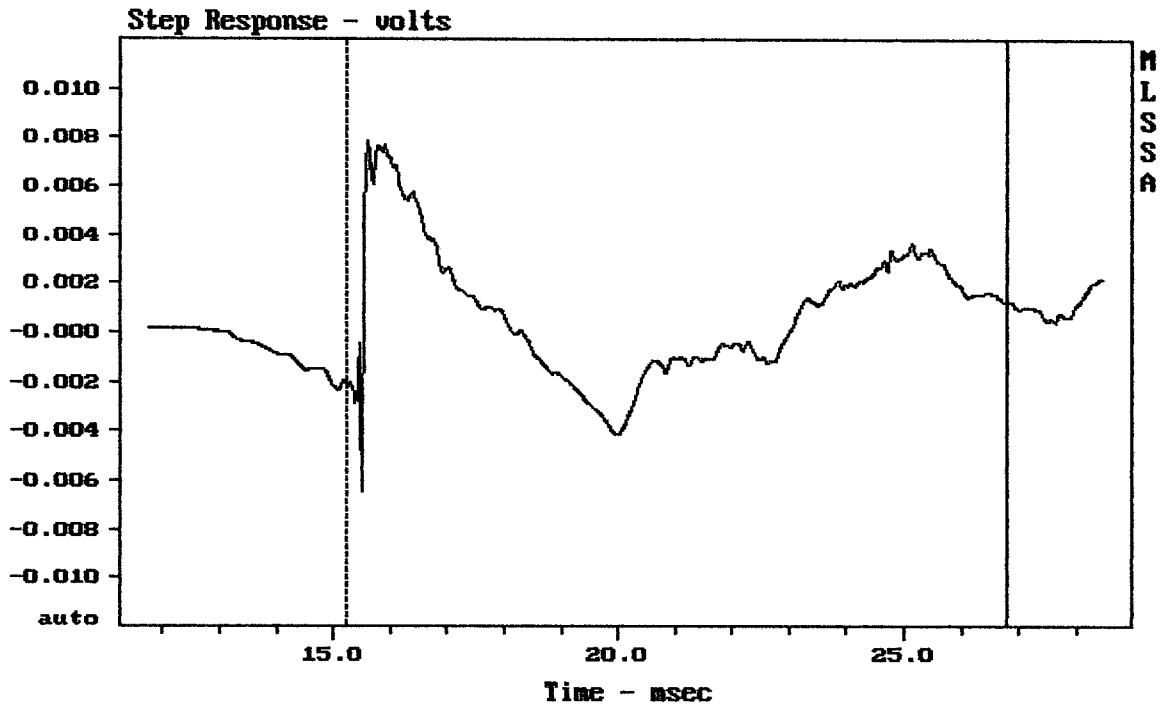

mean: 0.0007929, rms: 0.002771, std: 0.002655, max: 0.007905, min: -0.006488

SRM550


MLSSA: Time Domain

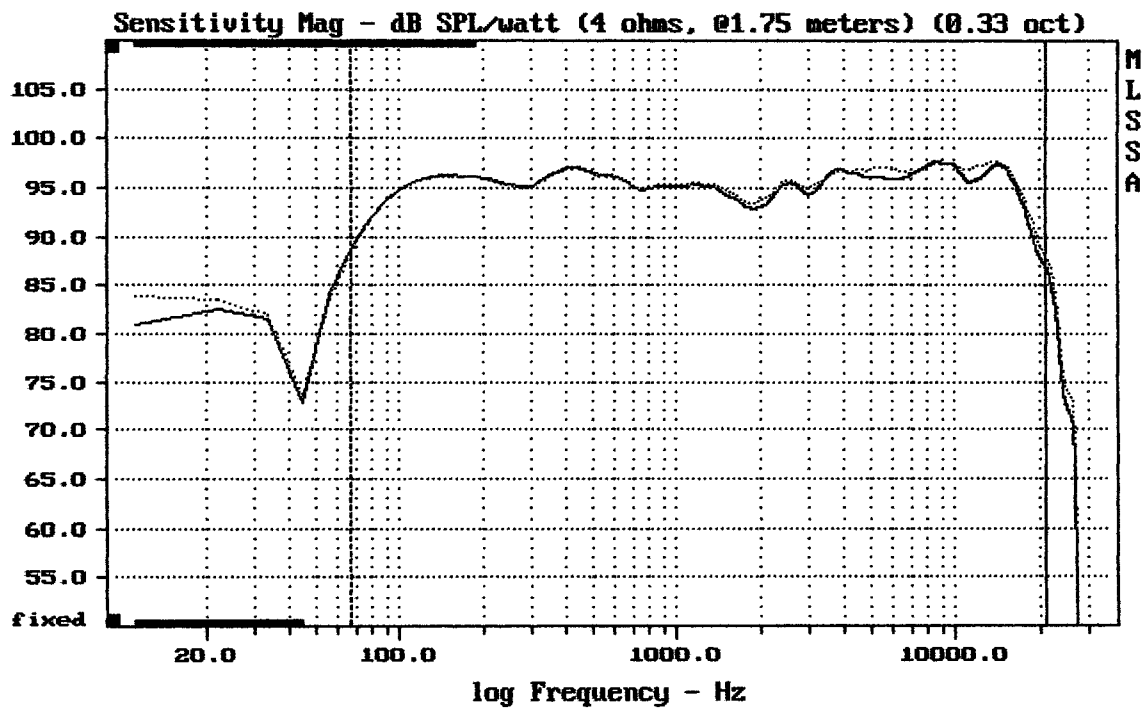

Overlay Compare: dev= +0.94/-0.95, std= 0.5, avg= -0.6

SRM550


MLSSA: Frequency Domain

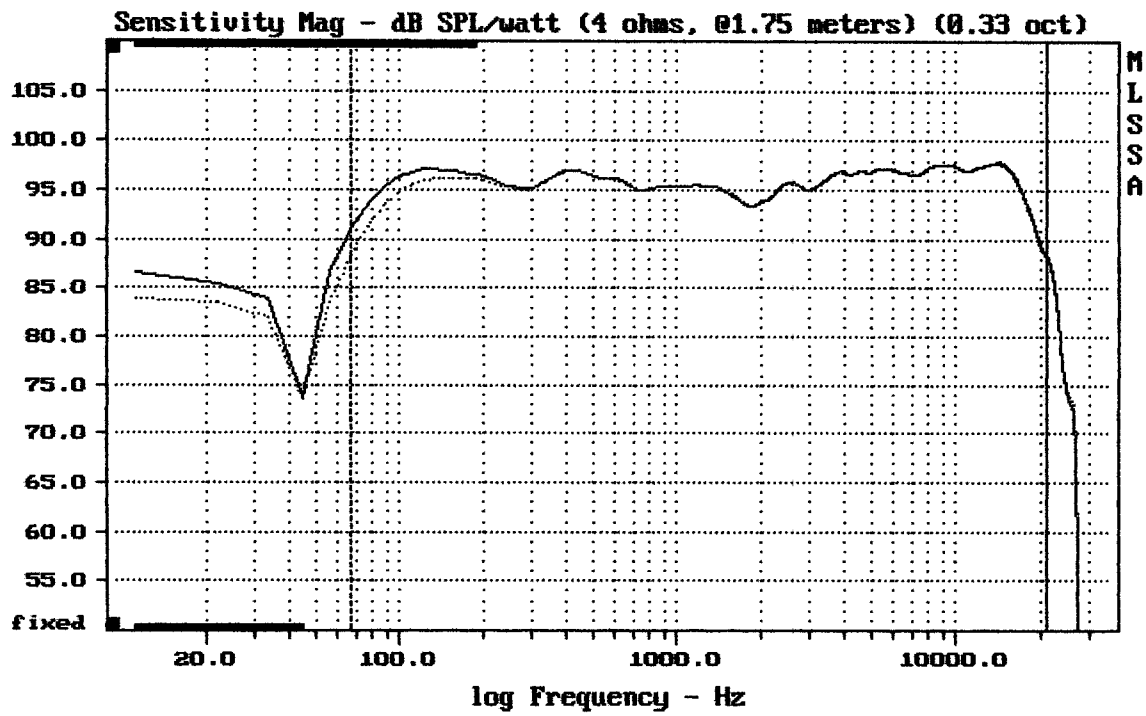

Overlay Compare: dev= +2.6/-0.1, std= 0.12, avg= 0.034

EQ DJ \_\_\_\_


MLSSA: Frequency Domain

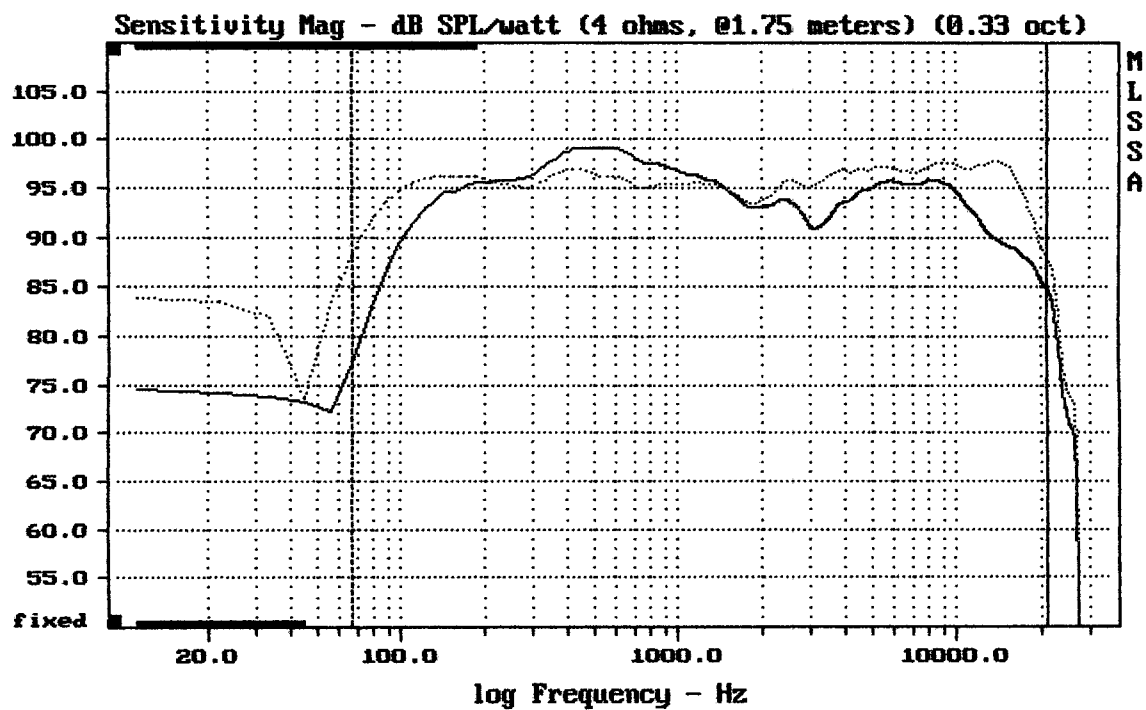

Overlay Compare: dev= +6.7/-7.3, std= 2.7, avg= -3.8

EQ MON \_\_\_\_


MLSSA: Frequency Domain

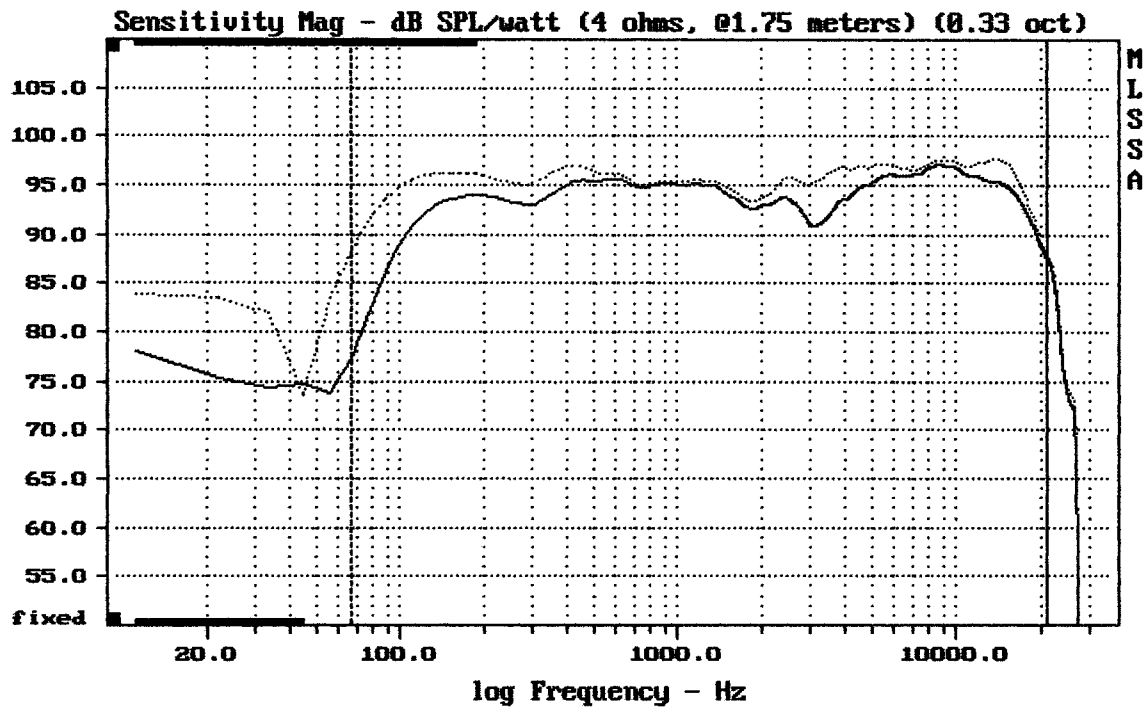

Overlay Compare: dev= +1.2/-9.8, std= 1, avg= -1.4

EQ SOLO \_\_\_\_


MLSSA: Frequency Domain

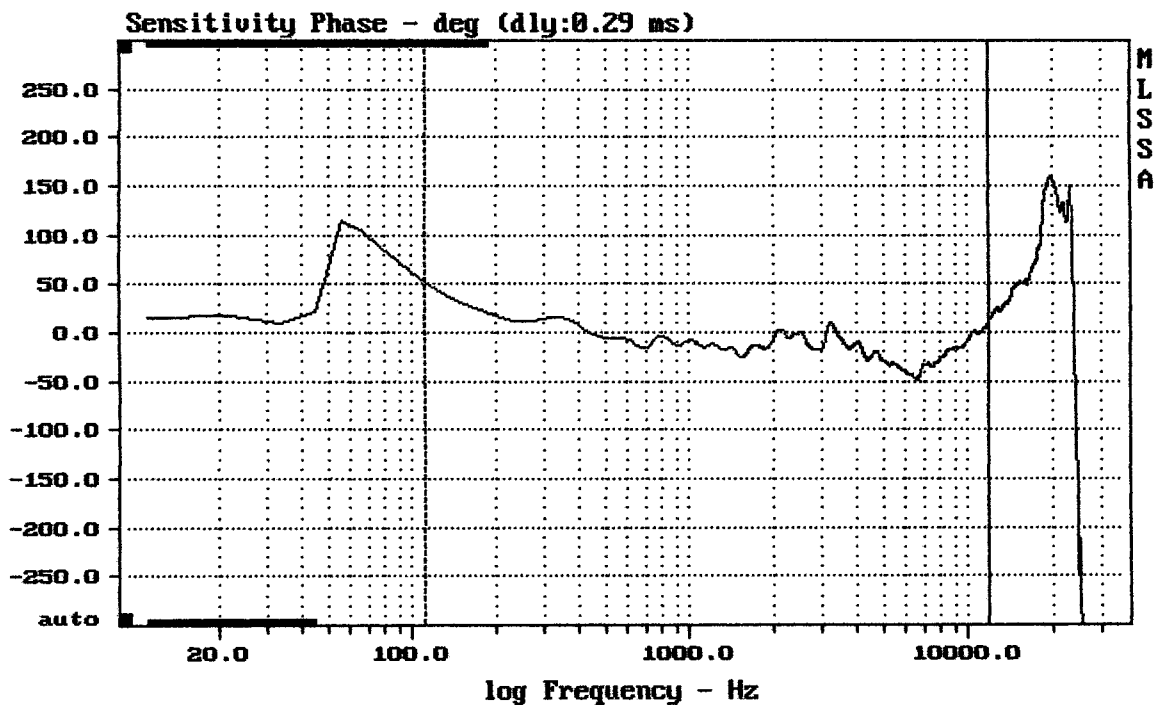

mean: -16.27, rms: 22.45, std: 15.47, max: 53.5, min: -48.03

EQ SRM 550


MLSSA: Frequency Domain

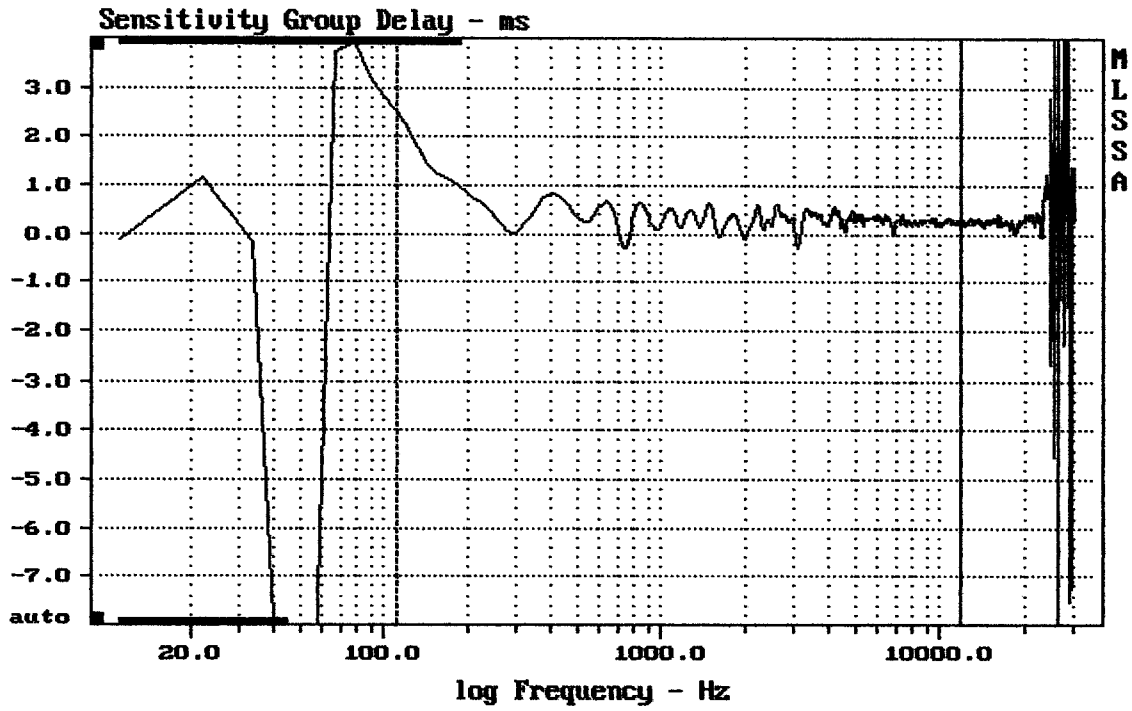

mean: 0.3033, rms: 0.3525, std: 0.1796, max: 2.535, min: -0.2976

SRM550

MLSSA: Frequency Domain

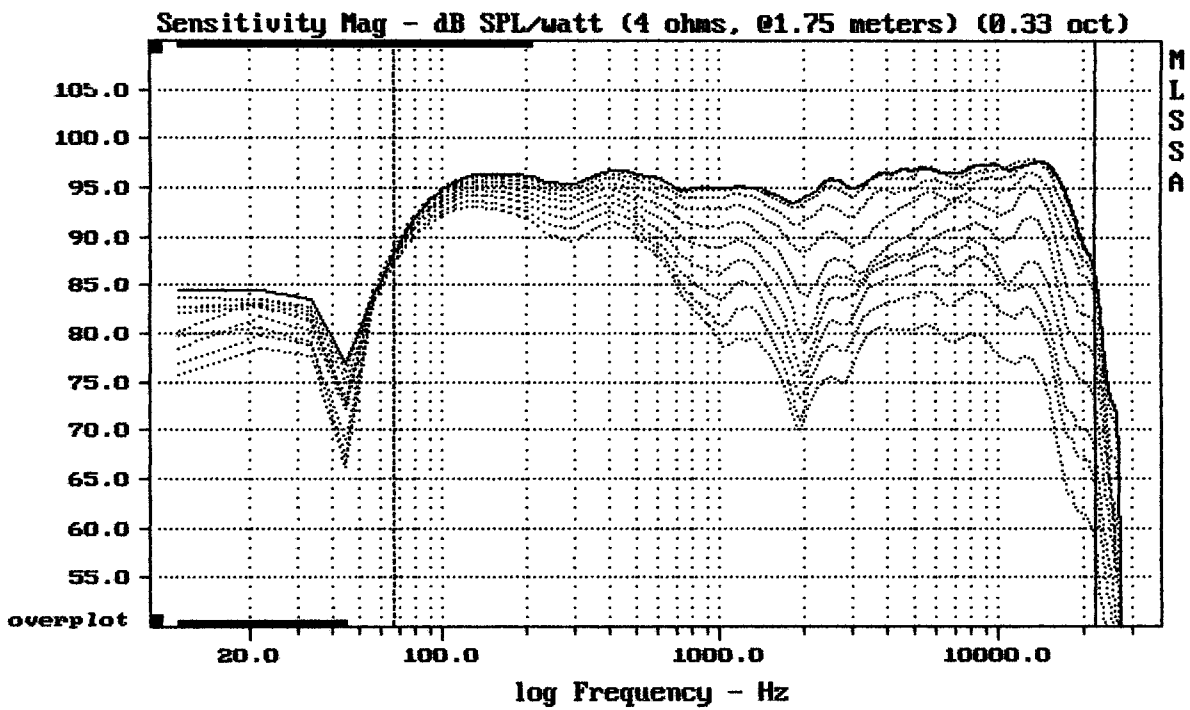


Overlay Compare: dev= +20/-9.2, std= 5.7, avg= -21

SRM550

MLSSA: Frequency Domain

Sensitivity Mag - dB SPL/watt (4 ohms, @1.75 meters) (0.33 oct)

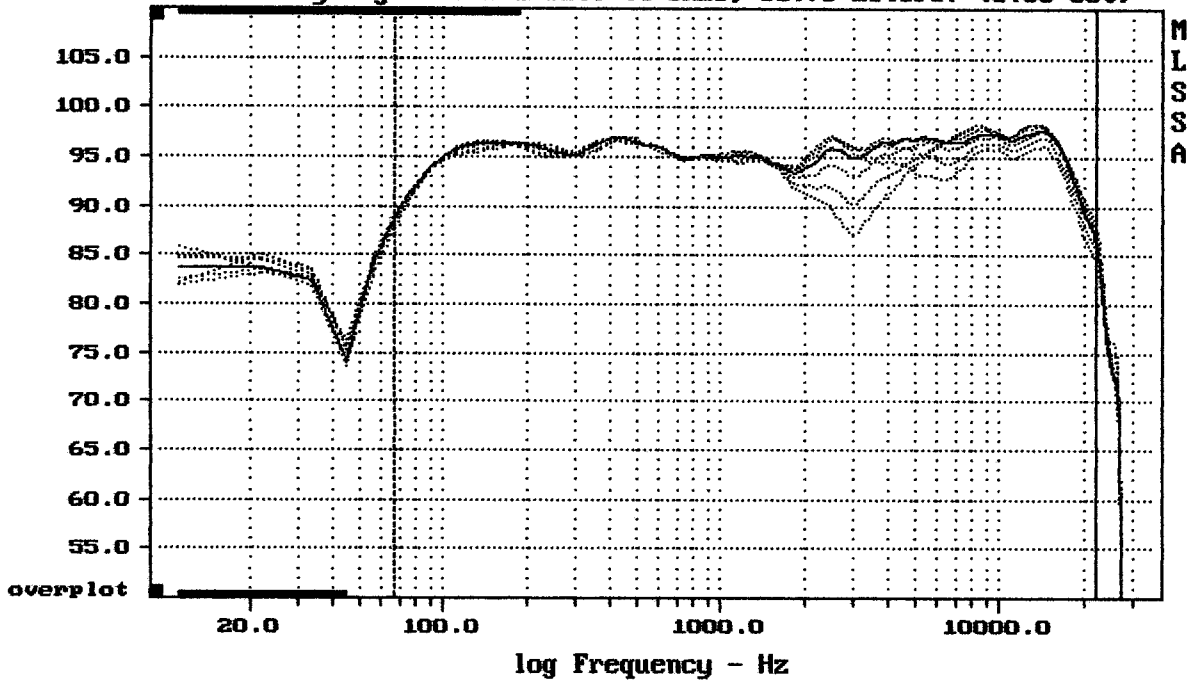


CURSOR: y = 88.3541 x = 22005.9475 (1983)

SRM550

MLSSA: Frequency Domain


Sensitivity Mag - dB SPL/watt (4 ohms, @1.80 meters) (0.33 oct)

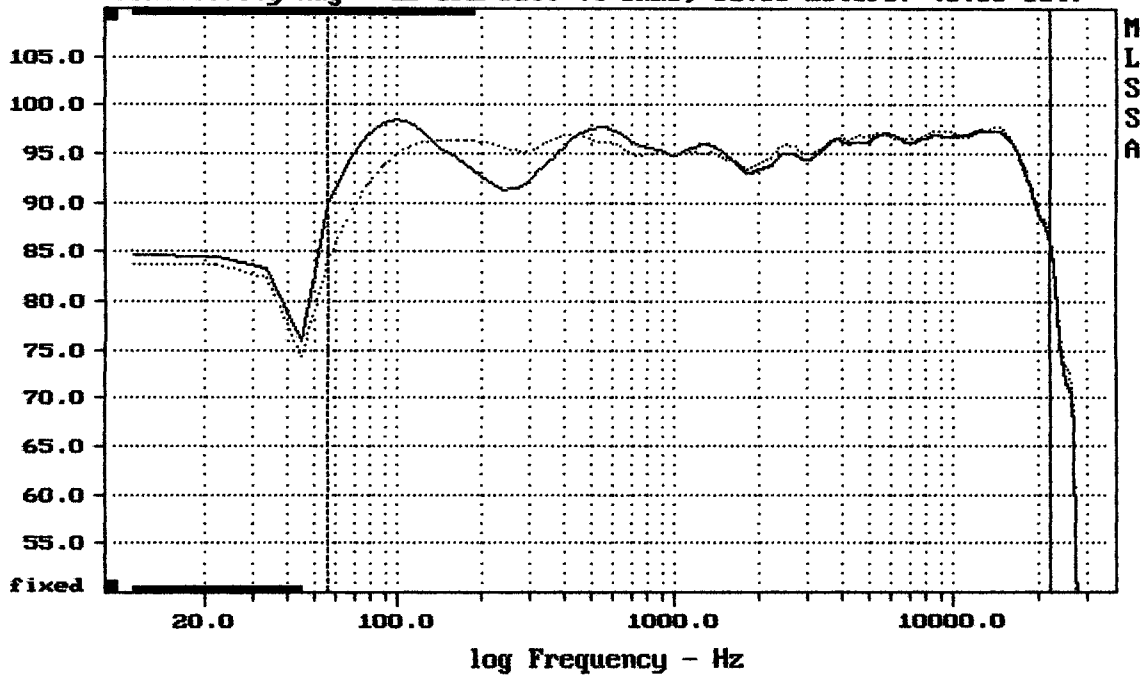

Overlay Compare: dev= +5.9/-3.9, std= 0.51, avg= -0.26

STAGE MONITOR \_\_\_\_\_


MLSSA: Frequency Domain

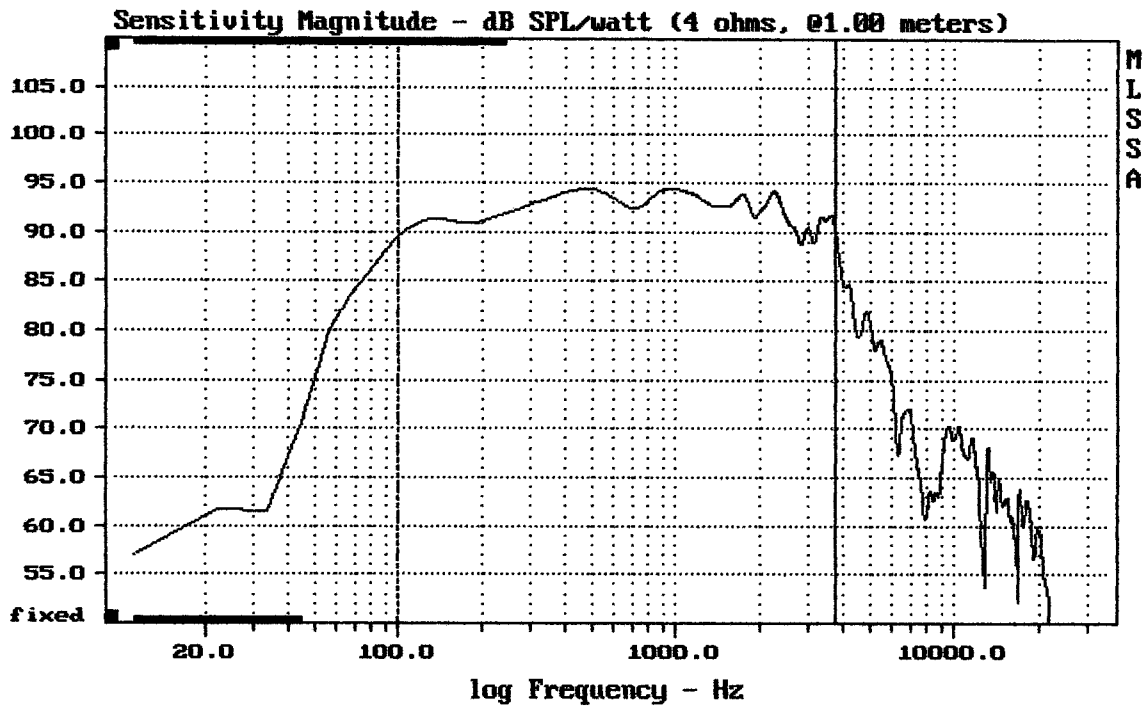

Level (100:3751 Hz) = 92.63 dB SPL/watt (4 ohms, @1.00 meters)

SRM550

MLSSA: Frequency Domain

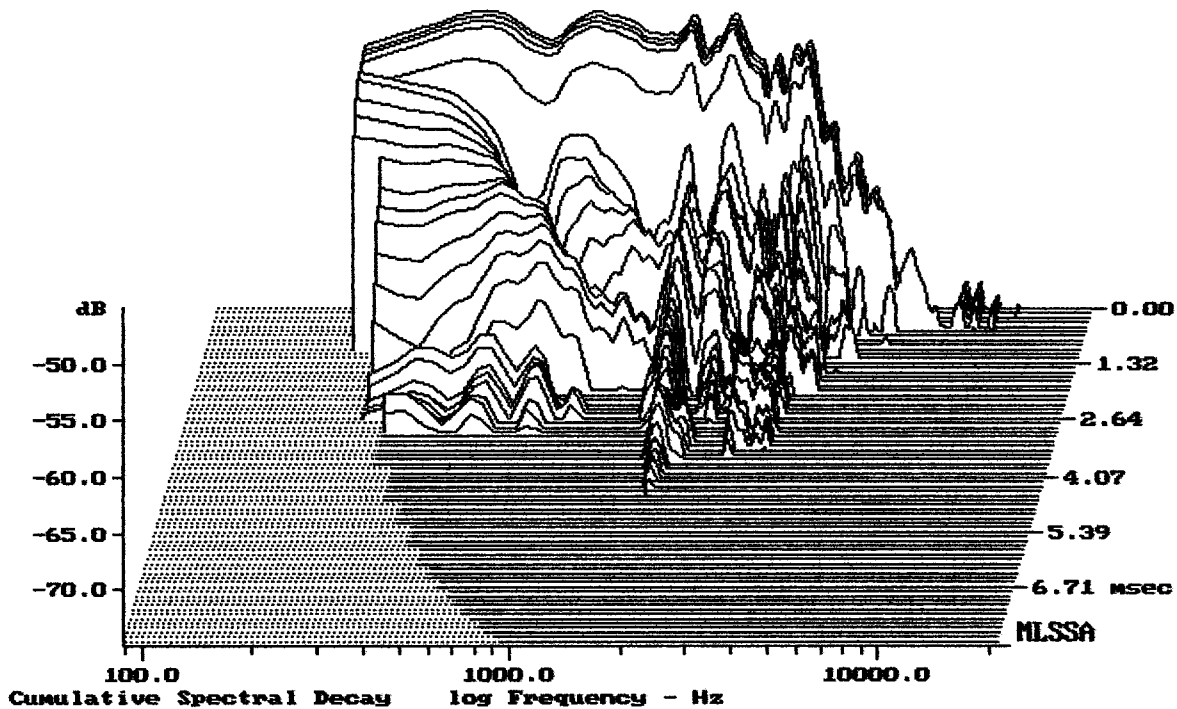

-74.48 dB, 1776 Hz (40), 4.290 msec (40)

DTTO

## Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.16	Ohms
2	Fs	55.22	Hz
3	Re	3.21	Ohms[dc]
4	Res	34.88	Ohms
5	Qms	4.83	
6	Qes	0.44	
7	Qts	0.41	
8	L1	0.57	mH
9	L2	0.85	mH
10	R2	3.00	Ohms
11	RMSE-load	0.28	Ohms
12	Vas(Sd)	72.39	liters
13	Mms	49.02	grams
14	Cms	169	$\mu\text{M}/\text{Newton}$
15	B1	11.09	Tesla-M
16	SPLref(Sd)	96.2	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (60.00 grams)

Area (Sd): 551.55 sq cm


DCR mode: Measure (-0.11 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -31.7% (-20% to -50% is recommended).

SRM550

MLSSA: Parameters

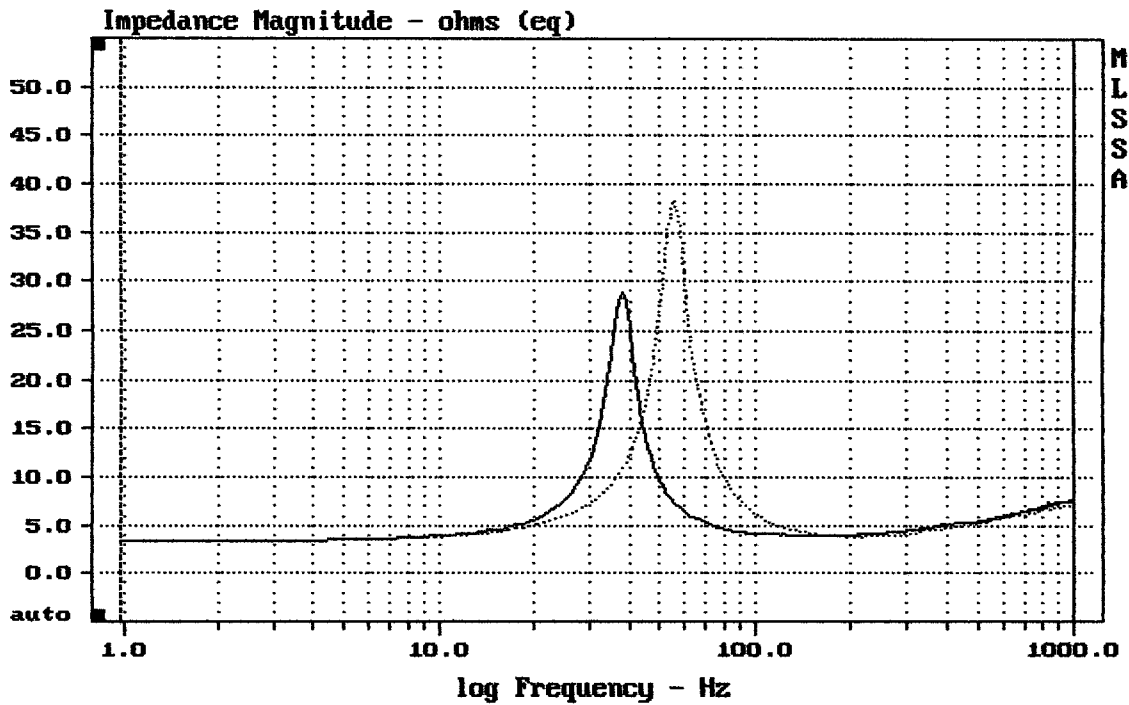


---

 mean: 6.2, rms: 7.26, std: 3.777, max: 38.34, min: 3.283
 

---

DTTO

MLSSA: Frequency Domain