


Level (100:1898 Hz) = 93.78 dB SPL/watt (4 ohms, @1.50 meters)

15TBX100-4

MLSSA: Frequency Domain

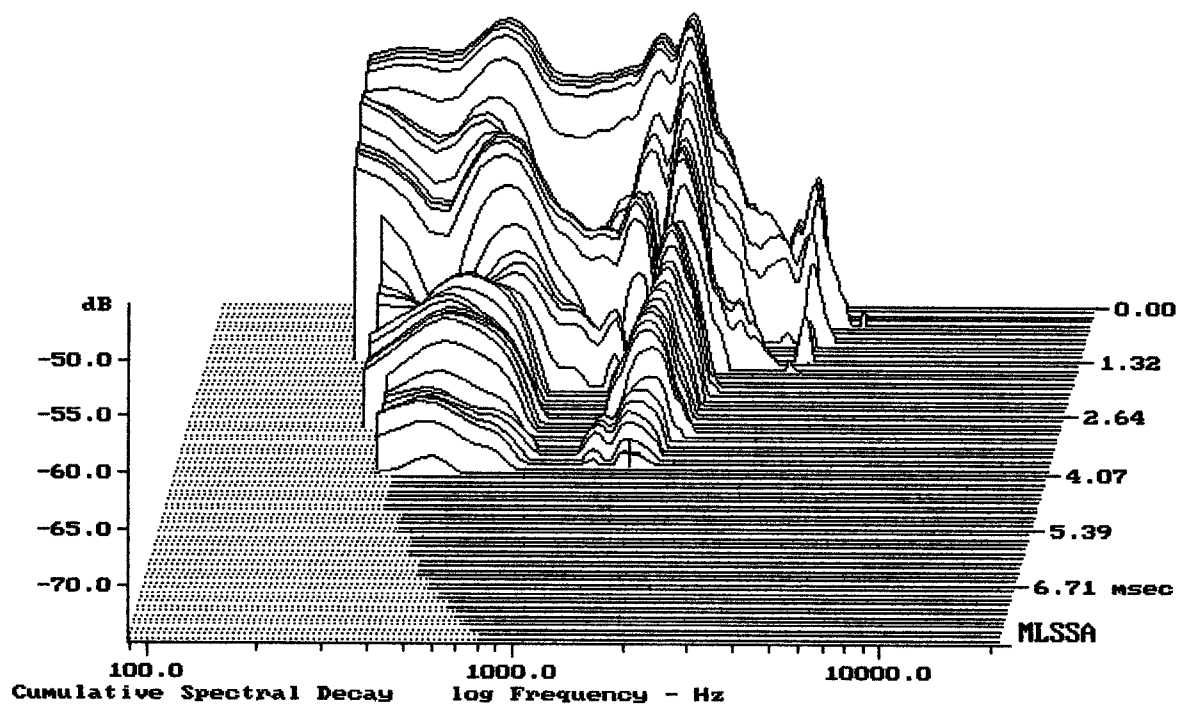

-73.90 dB, 1509 Hz (34), 3.850 msec (36)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.58	Ohms
2	Fs	40.24	Hz
3	Re	3.57	Ohms[dc]
4	Res	66.01	Ohms
5	Qms	5.74	
6	Qes	0.31	
7	Qts	0.29	
8	L1	1.21	mH
9	L2	1.21	mH
10	R2	4.98	Ohms
11	RMSE-load	0.49	Ohms
12	Vas(Sd)	122.66	liters
13	Mms	139.14	grams
14	Cms	112	$\mu\text{M}/\text{Newton}$
15	B1	20.11	Tesla-M
16	SPLref(Sd)	95.9	dB[Re]
17	Rub-index	0.03	

Method: Mass-loaded (120.00 grams)

Area (Sd): 881.41 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -25.2% (-20% to -50% is recommended).

15TBX100-4ohm

MLSSA: Parameters

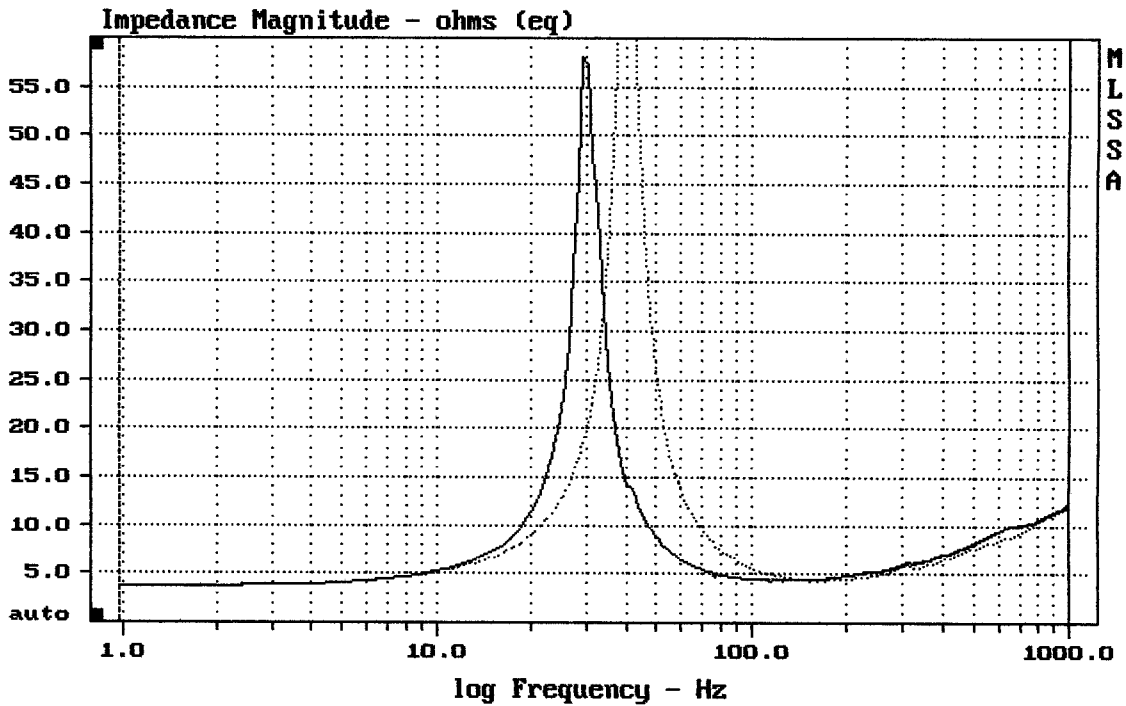

mean: 8.81, rms: 10.68, std: 6.035, max: 68.87, min: 3.668

MLSSA: Frequency Domain