


Level (100:2500 Hz) = 96.81 dB SPL/watt (8 ohms, @1.50 meters)

EMINENCE DELTA 15LF

MLSSA: Frequency Domain

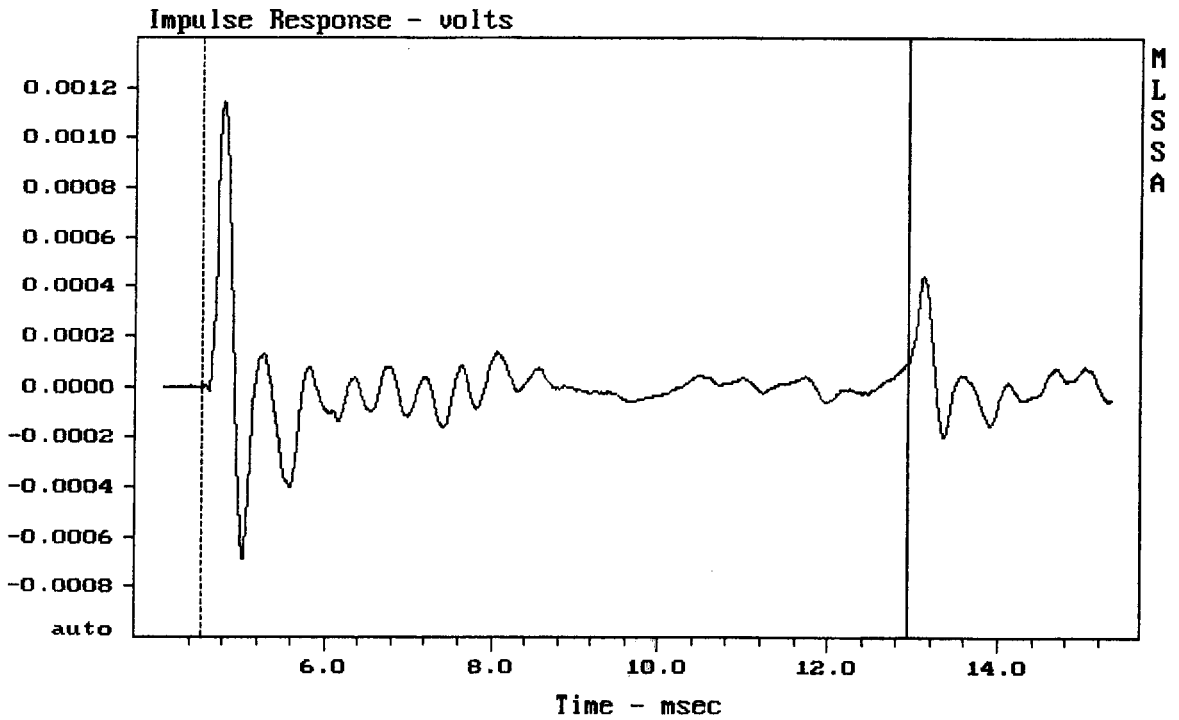

CURSOR: $y = 9.44896e-005$ $x = 12.9250$ (1175)

EMINENCE DELTA 15LF

Measured Data

Line	Parameter	Value	Units
1	RMSE-free	0.37	Ohms
2	Fs	36.70	Hz
3	Re	6.13	Ohms[dc]
4	Res	100.93	Ohms
5	Qms	8.14	
6	Qes	0.49	
7	Qts	0.47	
8	L1	1.17	mH
9	L2	2.06	mH
10	R2	6.90	Ohms
11	RMSE-load	0.63	Ohms
12	Vas(Sd)	270.94	liters
13	Mms	71.32	grams
14	Cms	264	$\mu\text{M}/\text{Newton}$
15	B1	14.28	Tesla-M
16	SPLref(Sd)	96.2	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -29.8% (-20% to -50% is recommended).

EMINENCE DELTA 15LF

MLSSA: Parameters

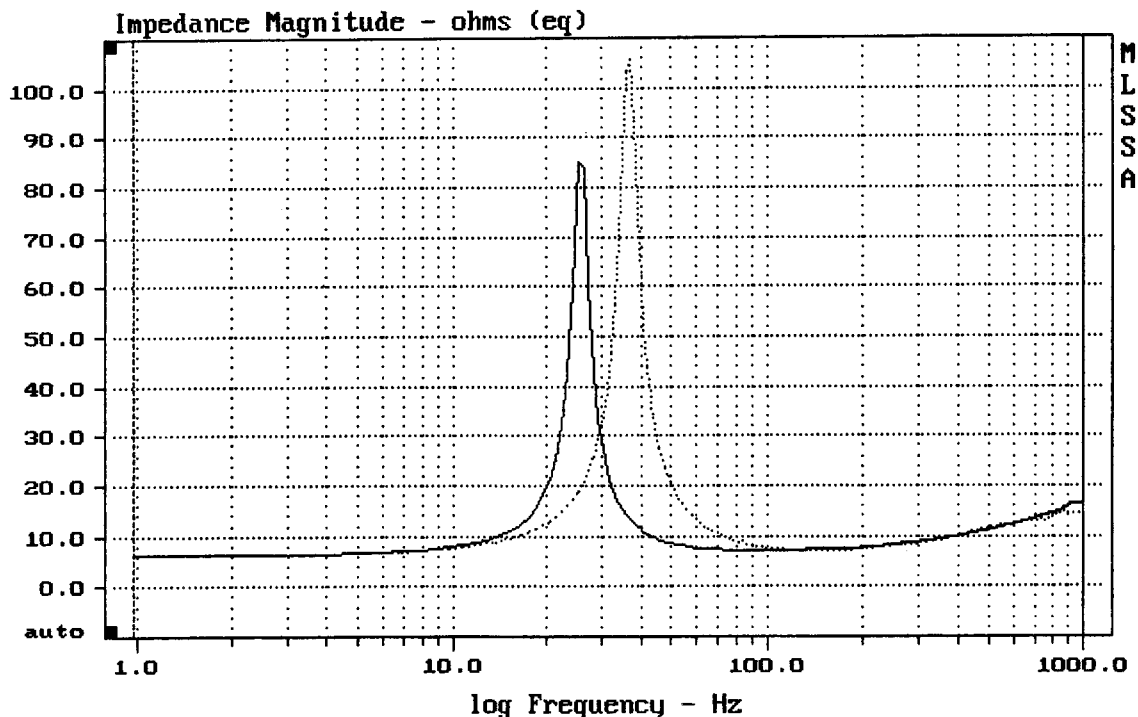

CURSOR: dy = -1.35761 x = 1000.9766 (1025)

DTTO

MLSSA: Frequency Domain