


Level (67:6004 Hz) = 90.13 dB SPL/watt (8 ohms, @1.00 meters)


EMINENCE BETA BCX

9-2-89 2:35 AM

MLSSA: Frequency Domain

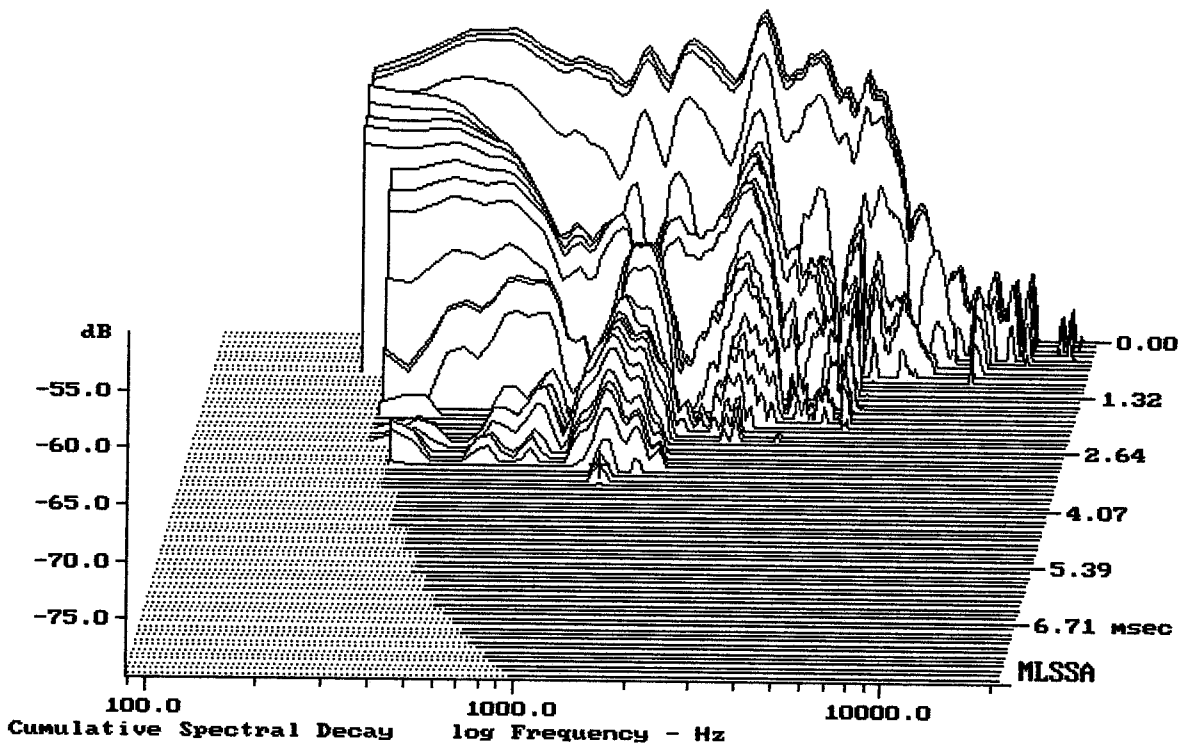

-78.51 dB, 1199 Hz (27), 3.410 msec (32)

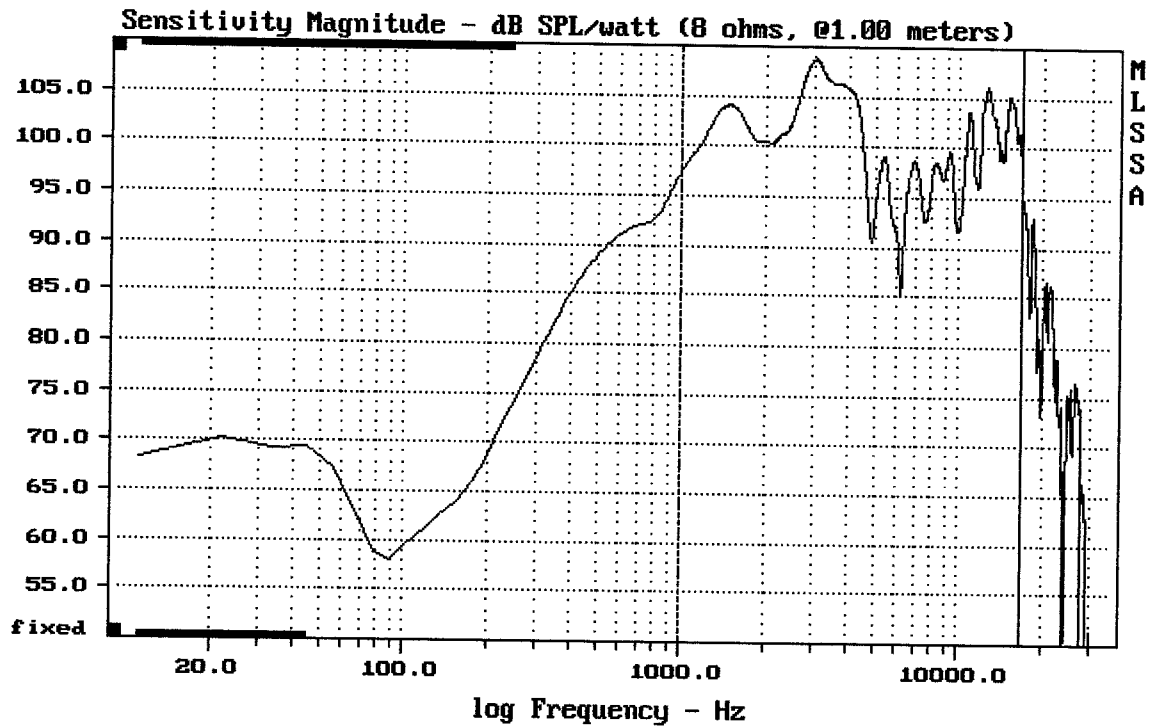


Level (999:16901 Hz) = 102.58 dB SPL/watt (8 ohms, @1.00 meters)


EMINENCE BETA 8CX + PSD2002S

9-2-89 2:39 AM

MLSSA: Frequency Domain

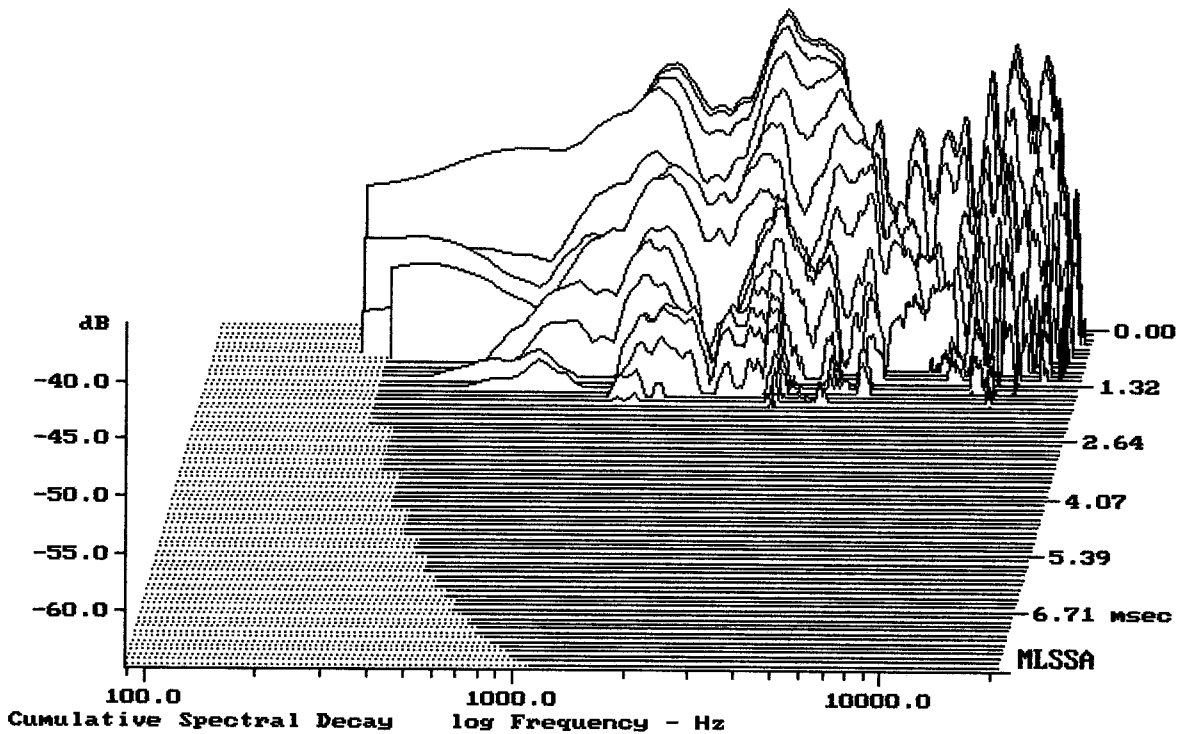

-63.84 dB, 3196 Hz (72), 1.870 msec (18)

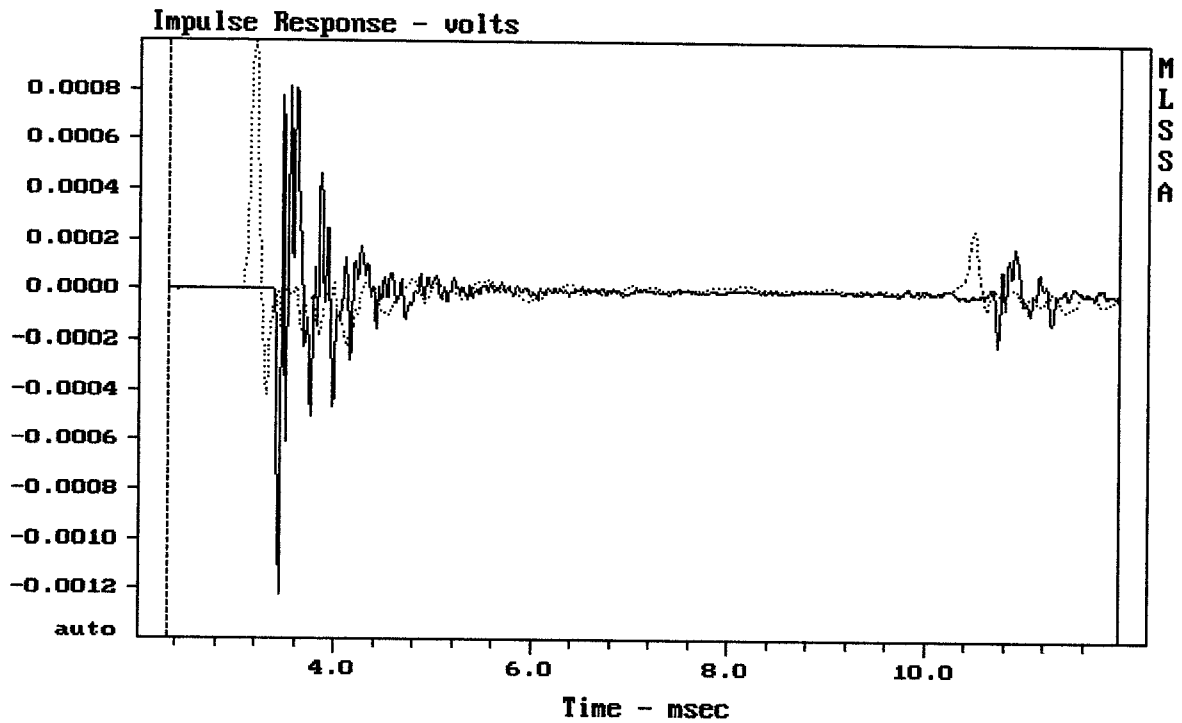


mean: $-3.216e-008$, rms: 0.000101 , std: 0.000101 , max: 0.001018 , min: -0.0004196

EMINENCE BETA BCX + PSD2002S

9-2-89 2:40 AM

MLSSA: Time Domain

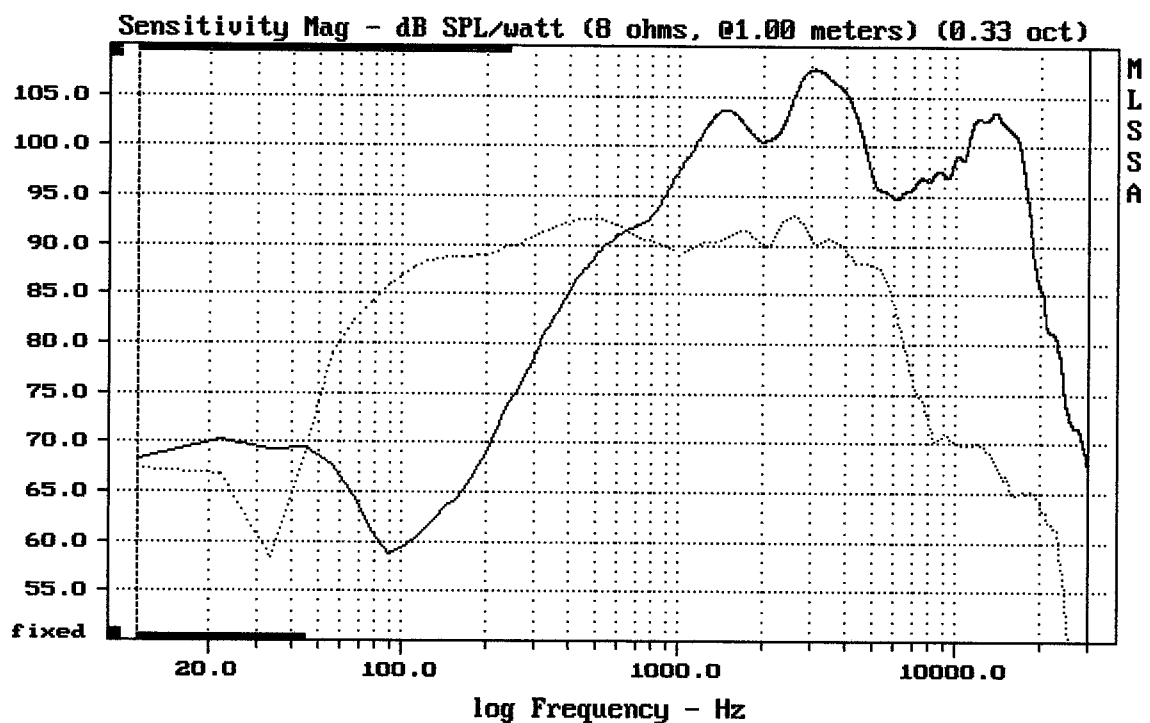

CURSOR: $dy = -27.0154$ $x = 30007.1014$ (2704)

EMINENCE BETA BCX + PSD2002S

MLSSA SPO 4.0D #960903-3057-3075 for Jiri Komon

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	1.05	Ohms
2	Fs	61.86	Hz
3	Re	5.43	Ohms[dc]
4	Res	111.66	Ohms
5	Qms	8.12	
6	Qes	0.39	
7	Qts	0.38	
8	L1	0.76	mH
9	L2	1.01	mH
10	R2	4.49	Ohms
11	RMSE-load	0.54	Ohms
12	Vas(Sd)	23.75	liters
13	Mms	17.90	grams
14	Cms	370	μ M/Newton
15	Bl	9.78	Tesla-M
16	SPLref(Sd)	93.4	dB[Re]
17	Rub-index	0.02	

Method: Mass-loaded (20.00 grams)

Area (Sd): 213.82 sq cm


DCR mode: Measure (-0.13 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -29.7% (-20% to -50% is recommended).

EMINENCE BETA 8CX

MLSSA: Parameters

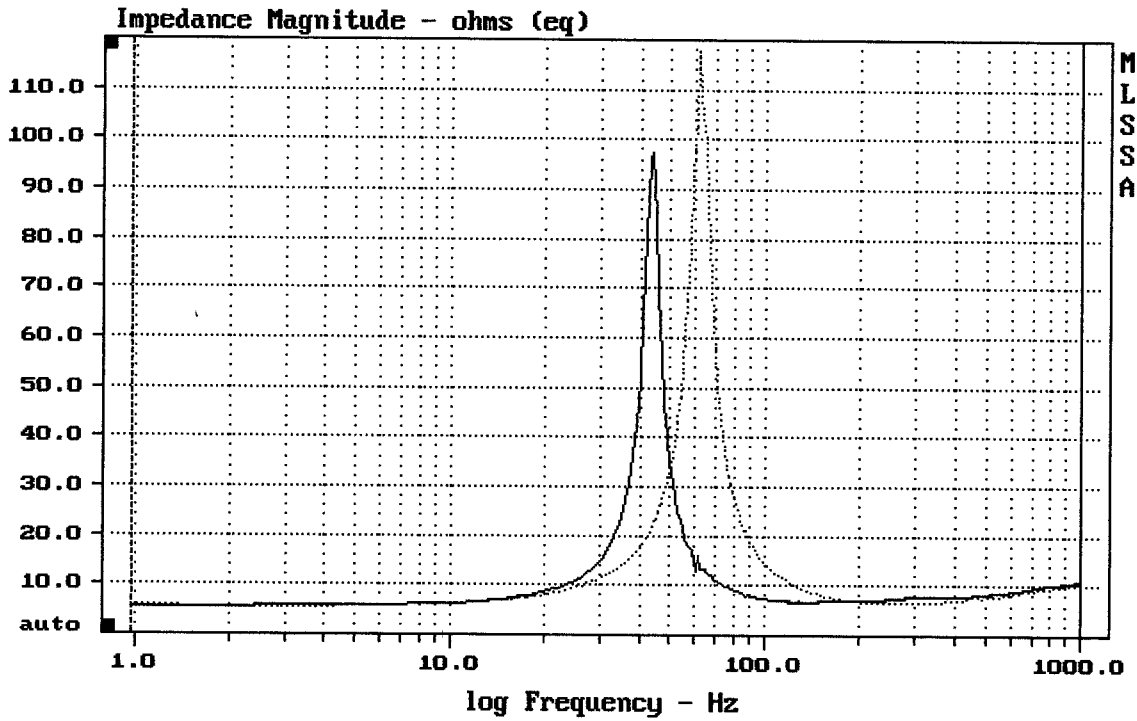

mean: 10.43, rms: 14.89, std: 10.63, max: 117.7, min: 5.54

9-2-89 8:26 PM

MLSSA: Frequency Domain