


Level (100:4506 Hz) = 99.77 dB SPL/watt (8 ohms, @1.50 meters)

EMINENCE KAPPA PRO 15

MLSSA: Frequency Domain

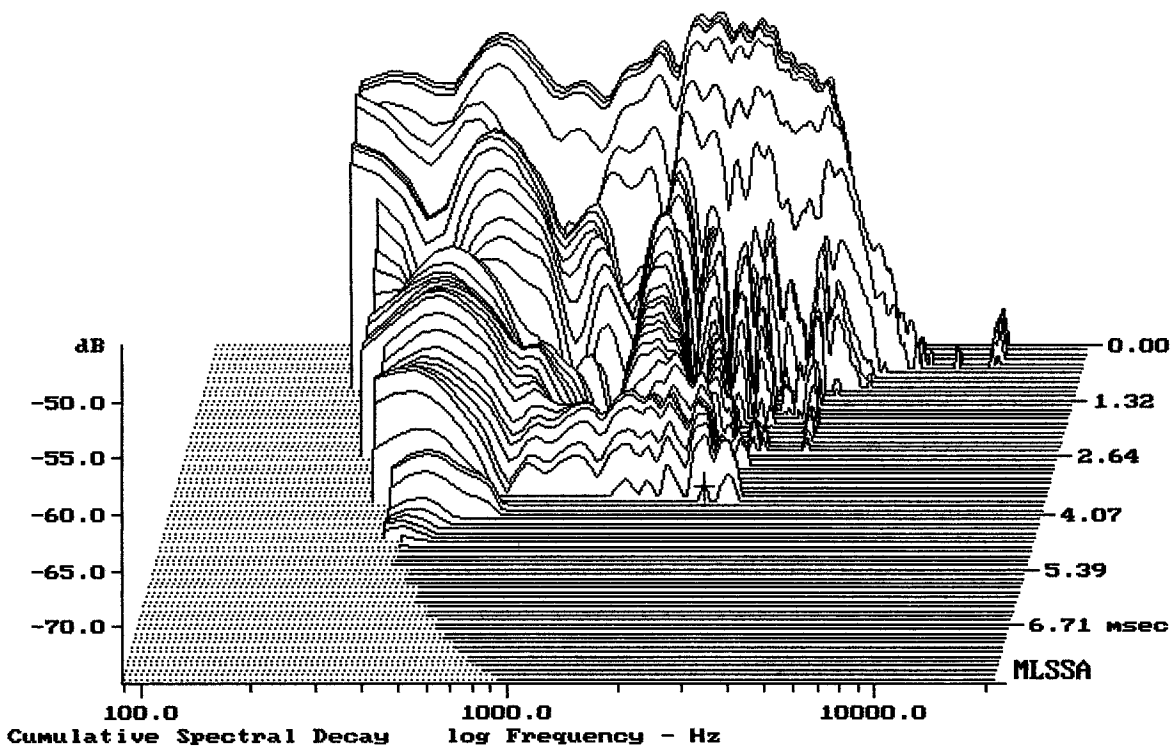

-73.64 dB, 2486 Hz (56), 3.740 msec (35)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.40	Ohms
2	Fs	49.40	Hz
3	Re	5.29	Ohms[dc]
4	Res	87.25	Ohms
5	Qms	7.48	
6	Qes	0.45	
7	Qts	0.43	
8	L1	0.79	mH
9	L2	1.15	mH
10	R2	3.91	Ohms
11	RMSE-load	0.38	Ohms
12	Vas(Sd)	173.08	liters
13	Mms	61.61	grams
14	Cms	168	$\mu\text{M}/\text{Newton}$
15	Bl	14.93	Tesla-M
16	SPLref(Sd)	98.5	dB[Re]
17	Rub-index	0.05	

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.19 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -33.3% (-20% to -50% is recommended).

EMINENCE KAPPA PRO 15

MLSSA: Parameters

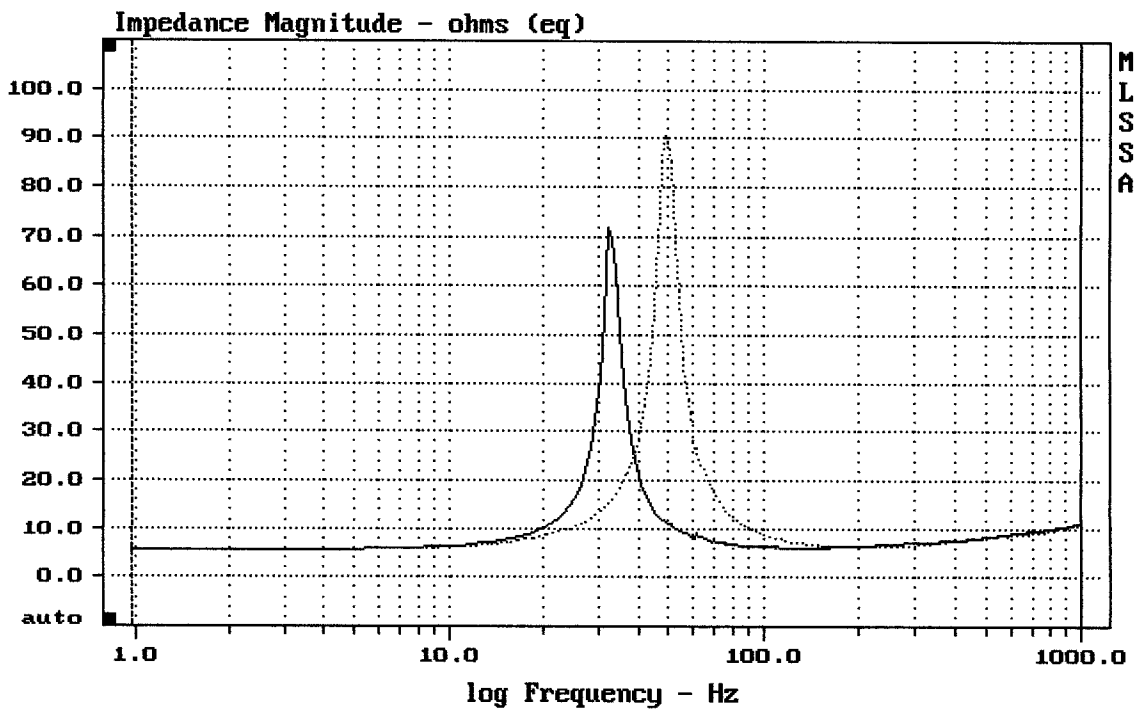

mean: 9.597, rms: 12.27, std: 7.64, max: 90.55, min: 5.493

MLSSA: Frequency Domain