

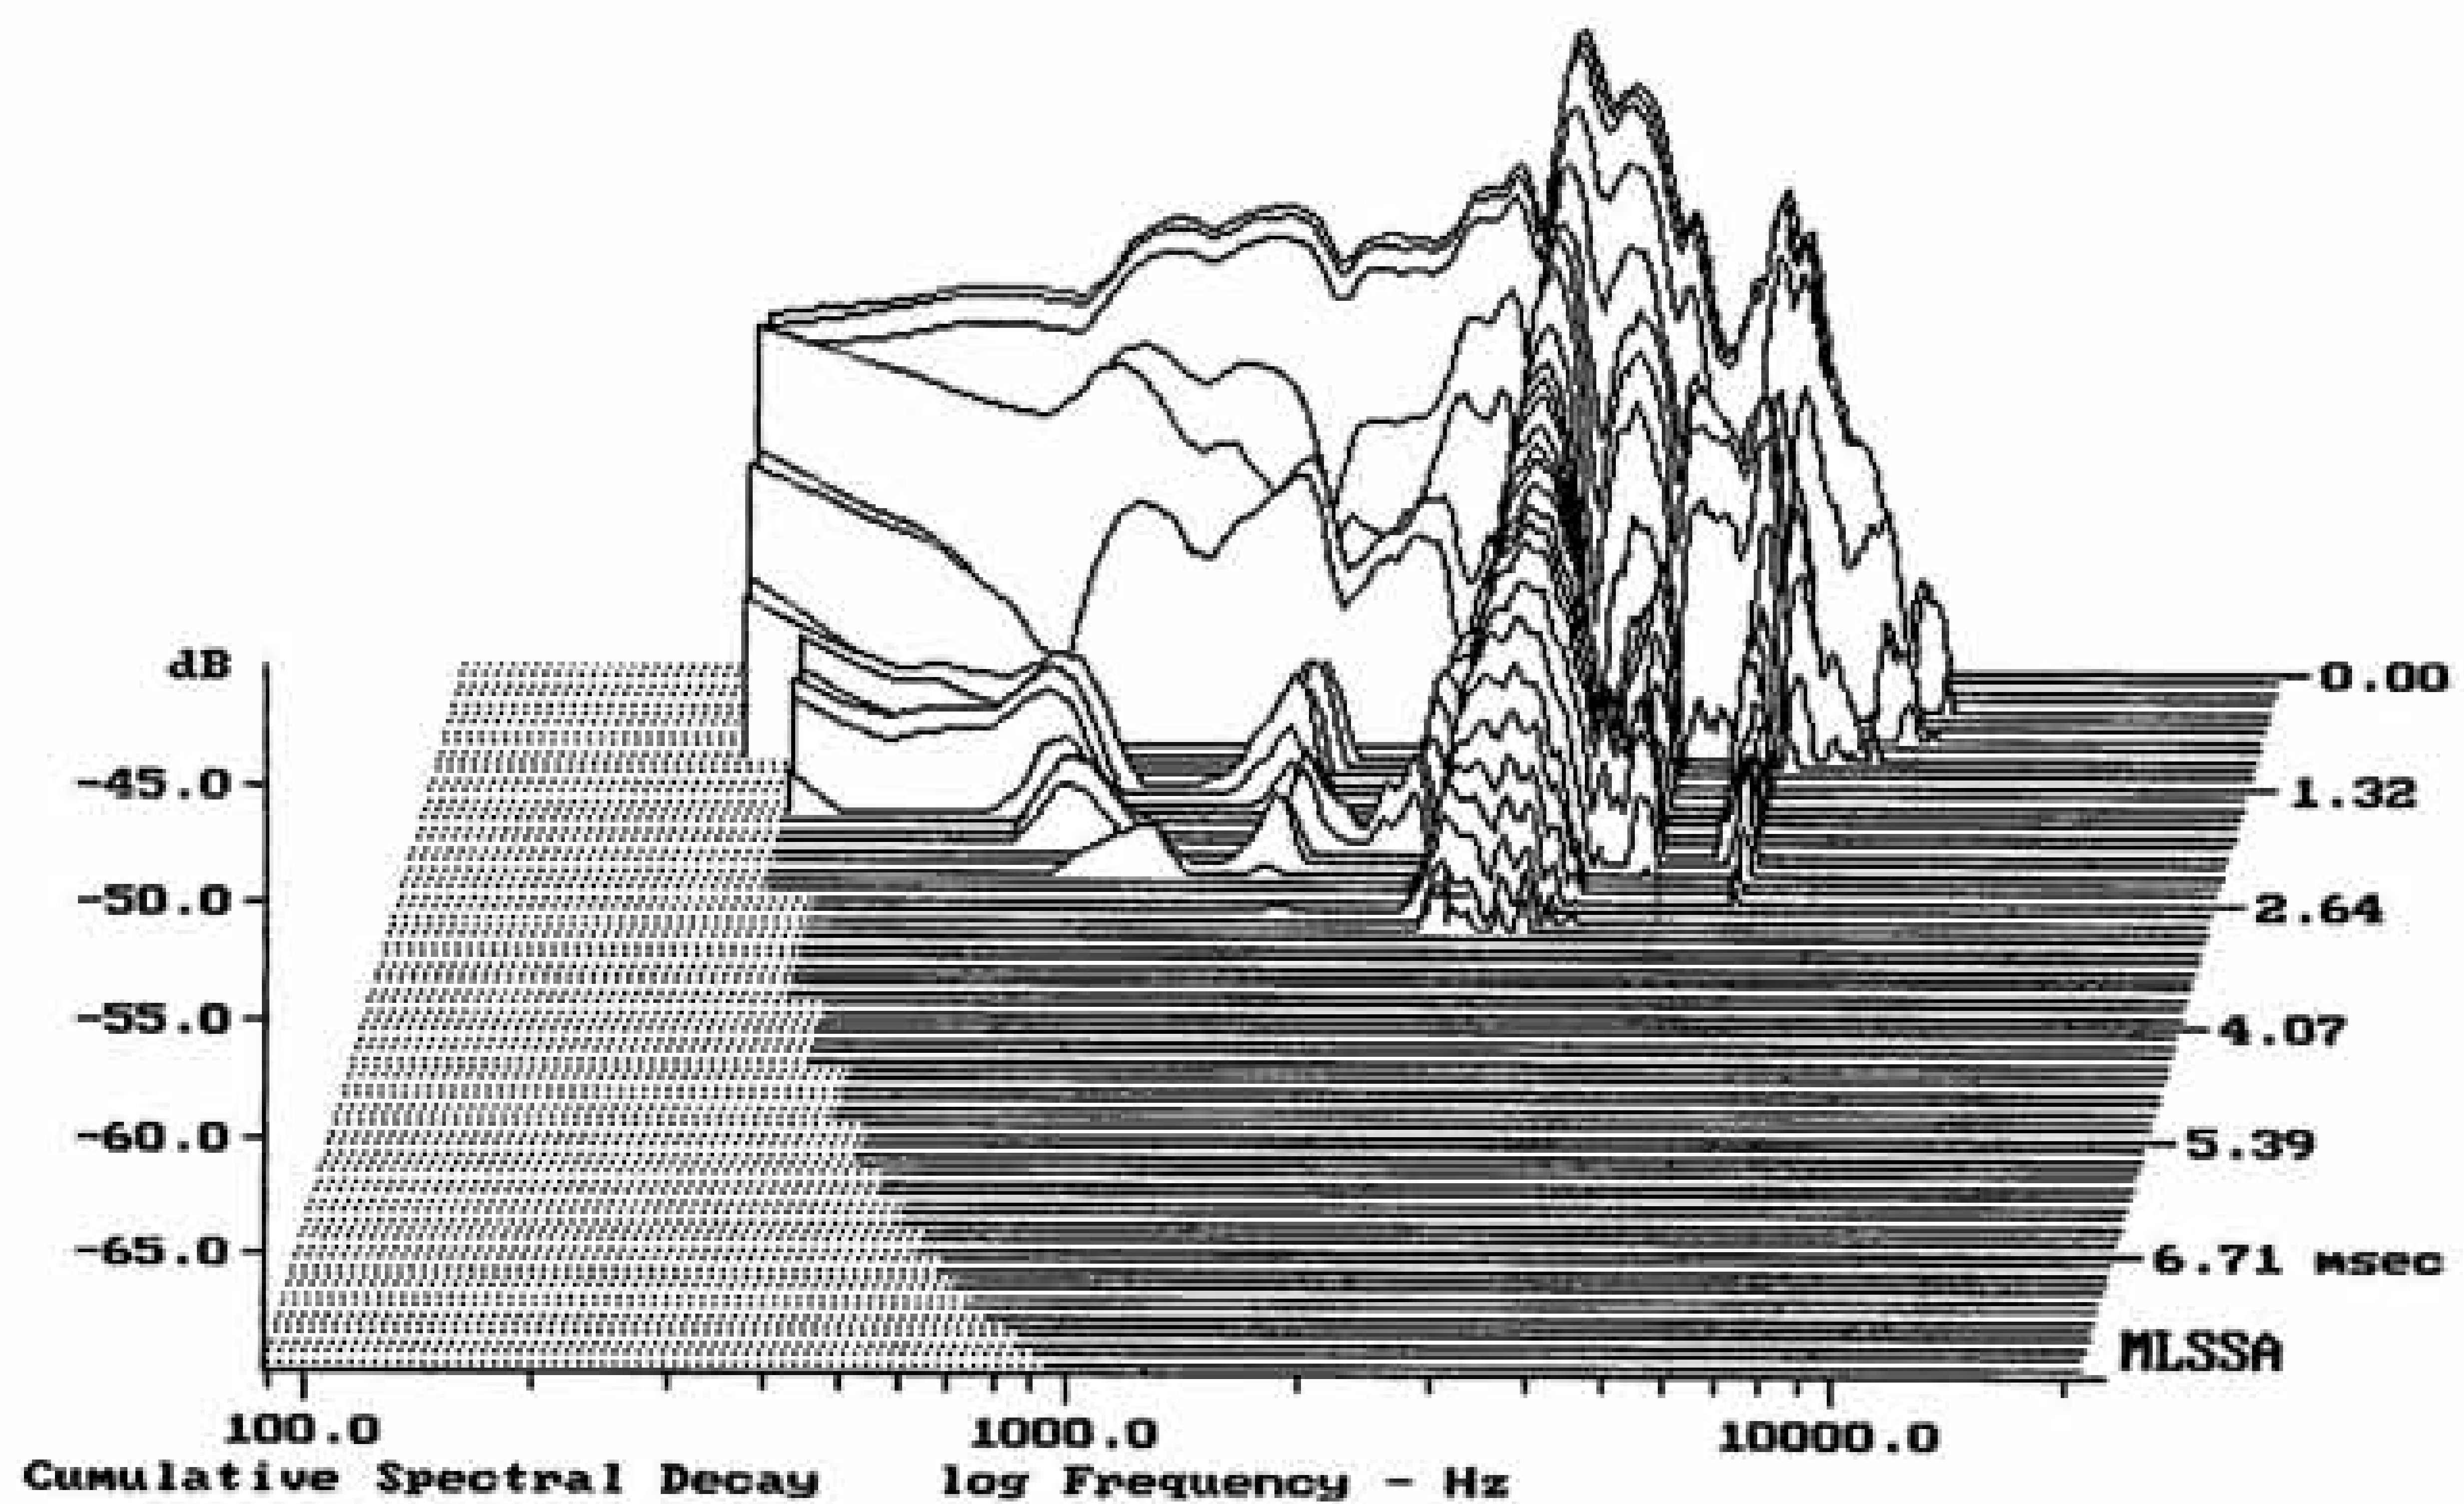

---

Level (100:5404 Hz) = 95.19 dB SPL/watt (8 ohms, @1.00 meters)

---

SELENIUM 10G1

MLSSA: Frequency Domain



-68.48 dB, 2131 Hz (48), 2.970 msec (28)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.26	Ohms
2	Fs	87.44	Hz
3	Re	6.30	Ohms[dc]
4	Res	99.21	Ohms
5	Qms	15.99	
6	Qes	1.02	
7	Qts	0.95	
8	L1	0.38	mH
9	L2	0.66	mH
10	R2	4.13	Ohms
11	RMSE-load	0.76	Ohms
12	Vas(Sd)	22.13	liters
13	Mms	25.22	grams
14	Cms	131	$\mu\text{M}/\text{Newton}$
15	B1	9.27	Tesla-M
16	SPLref(Sd)	93.5	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (30.00 grams)

Area (Sd): 346.36 sq cm

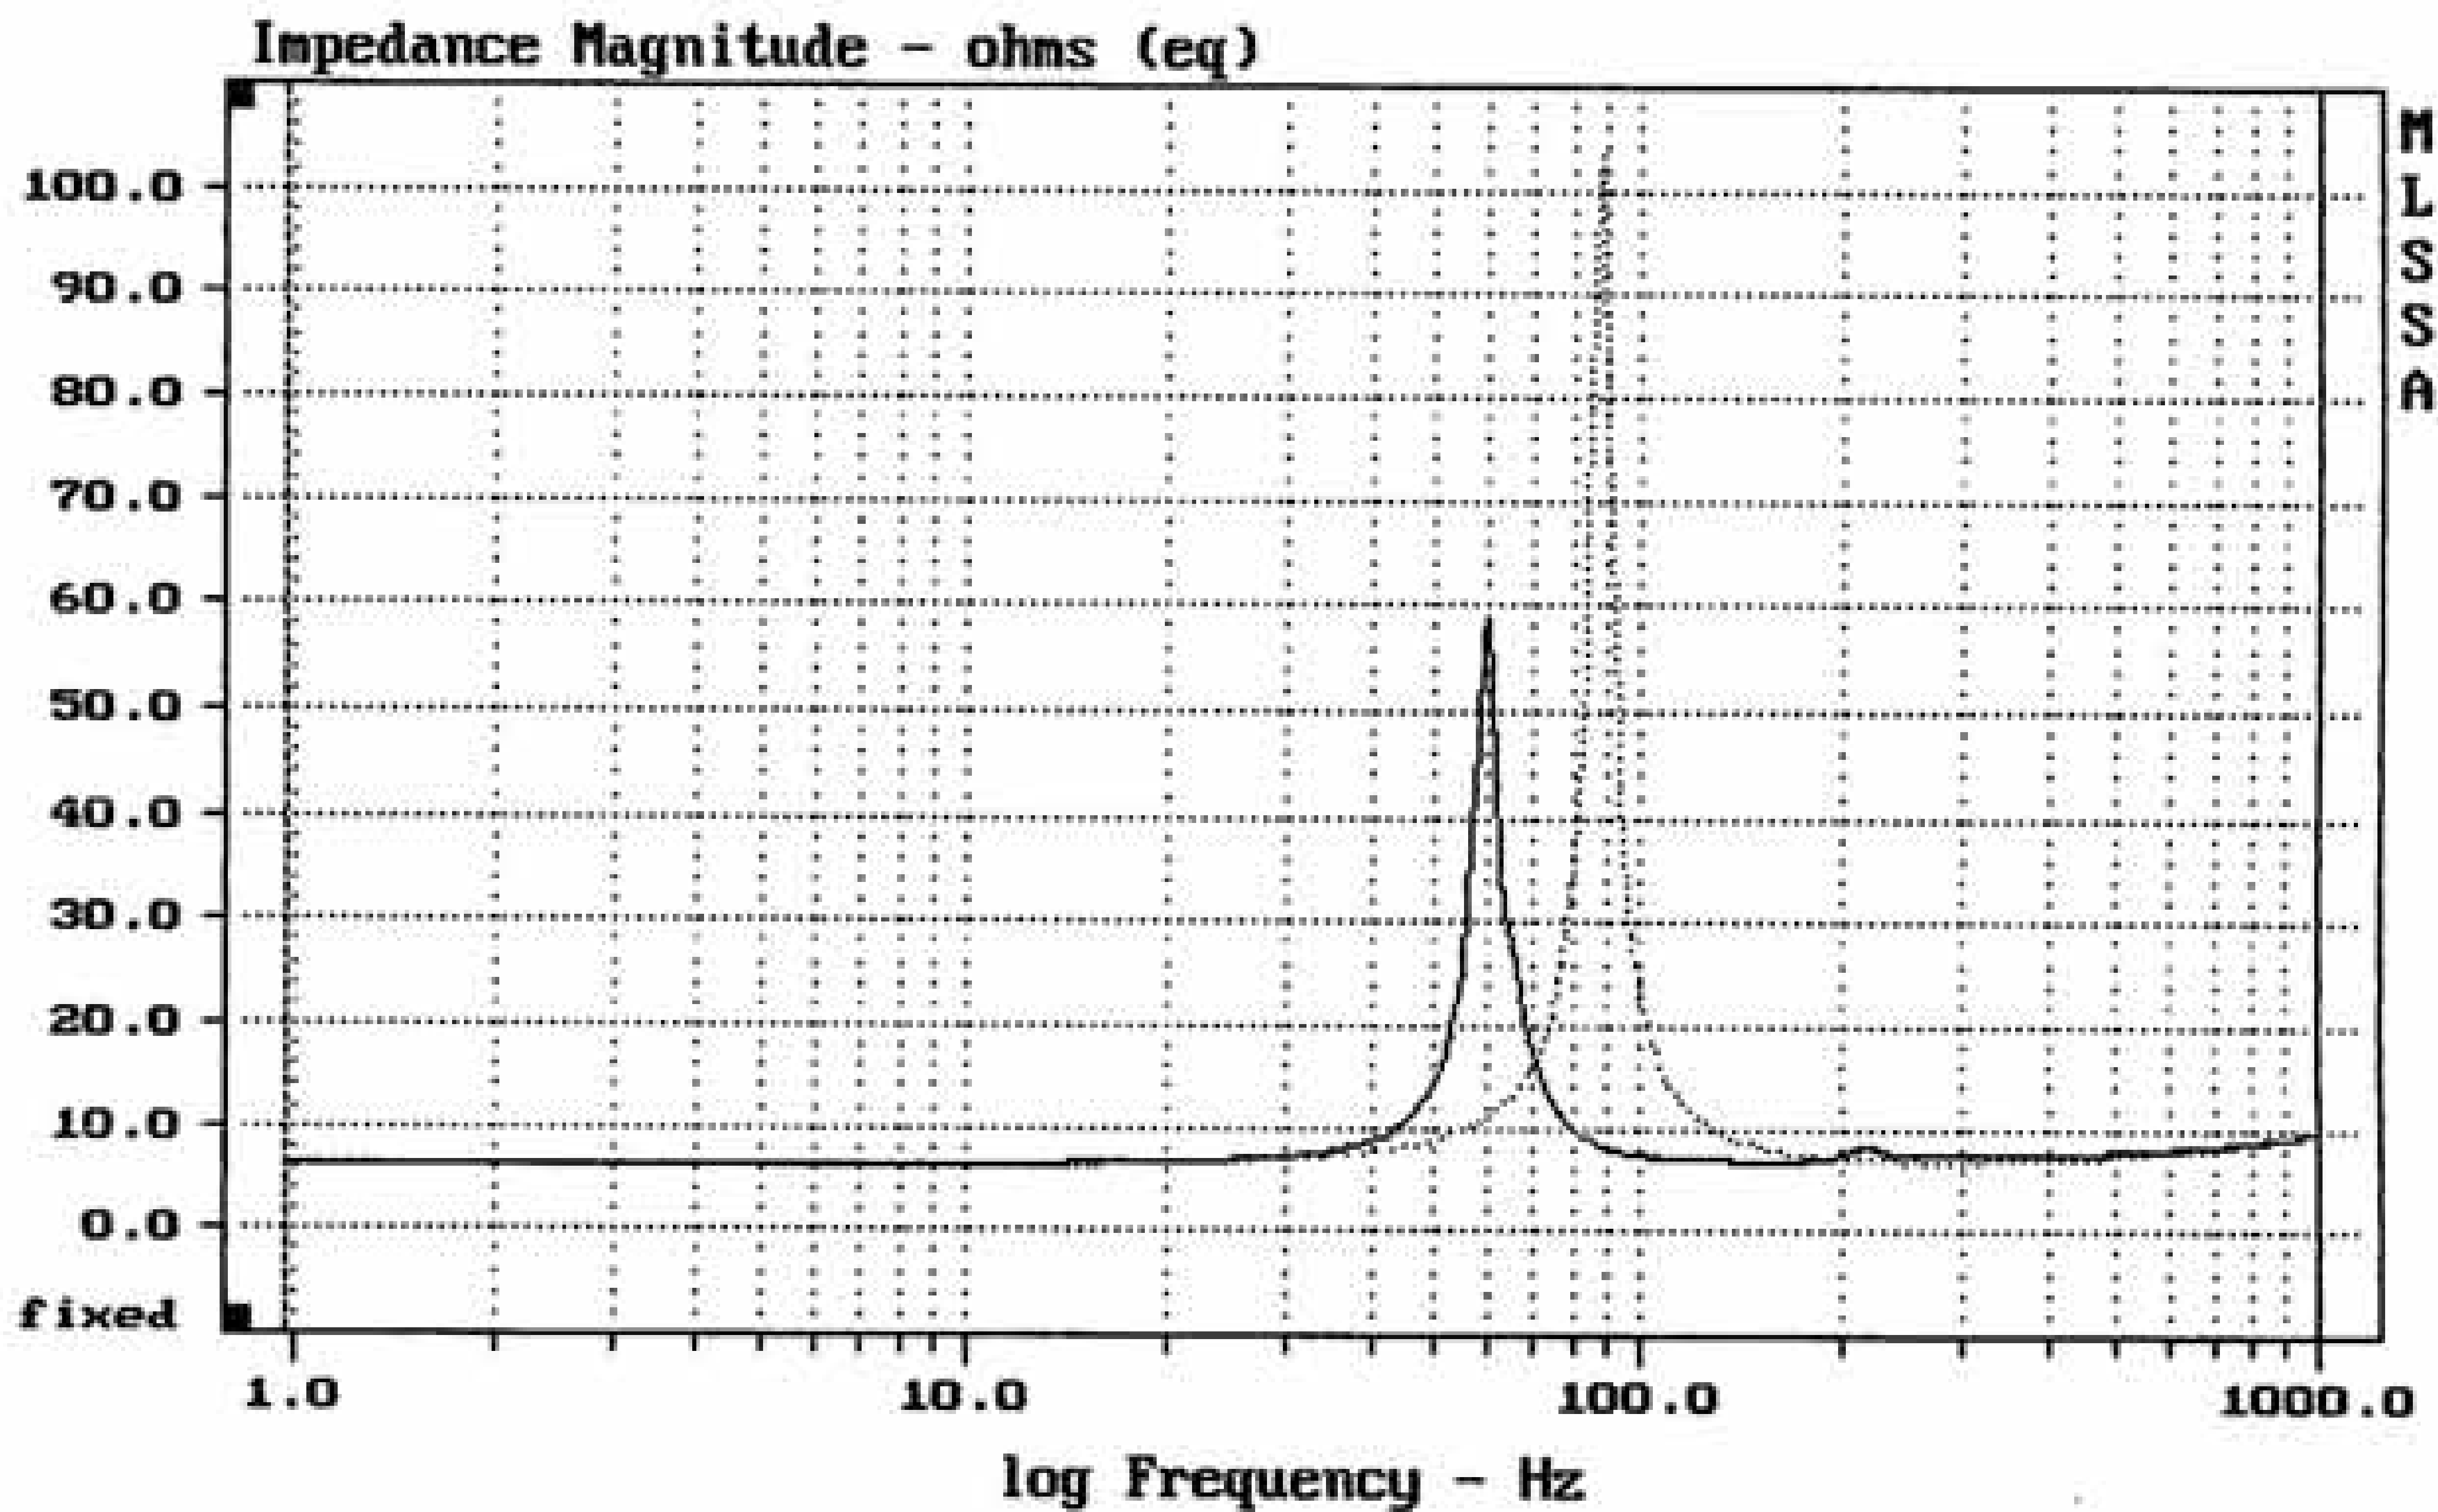
DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -32.1% (-20% to -50% is recommended).

SELENIUM 10G1

MLSSA: Parameters



mean: 9.289, rms: 12.32, std: 8.092, max: 103.4, min: 6.353

DTT0

MLSSA: Frequency Domain