



Up and down  
**Ramps**








Up and down

## Ramps small - OV100


The rigid aluminium lightweight ramp with a maximum capacity of 3881 kg (8538.20 lbs) this series offers an extremely cost-effective solution for materials handling with maximum safety and ease of use. Special anti-slip surface ensures safe operation in all environments.

OV110 is on top equipped with folding mechanism for low volume storage and better transportation possibilities. OV 100 & OV 110 are designed for commercial and industrial use.

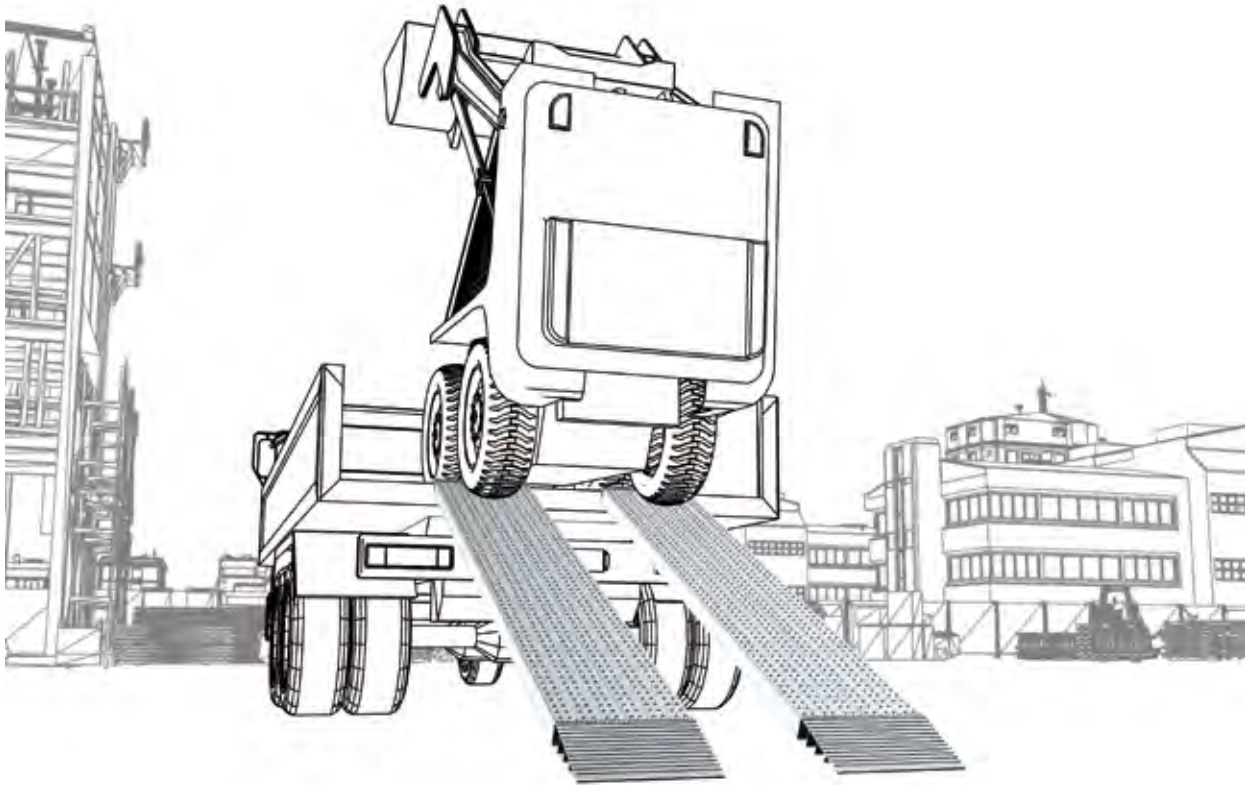


### OV100 LOADING RAMPS

Vehicle ramp with 3881 Kg (8538.2 lbs) max. loading capacity.

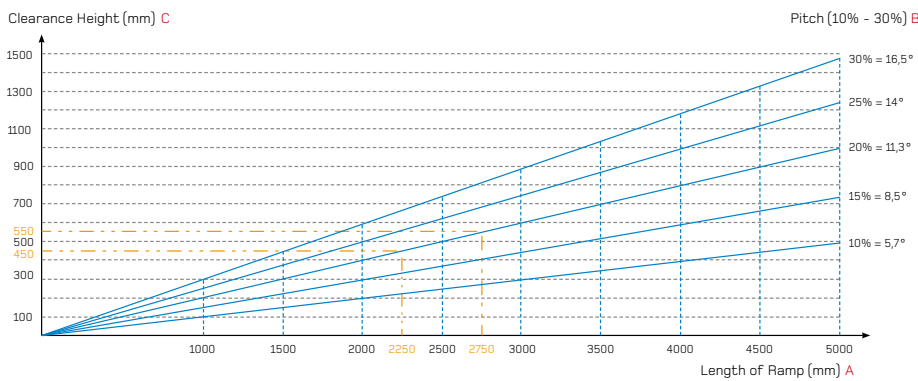

$$\text{Length of Ramp (mm) A} = \frac{\text{Clearance Height (mm) C}}{\text{Pitch (10\% - 30\%) B}} \times 100$$

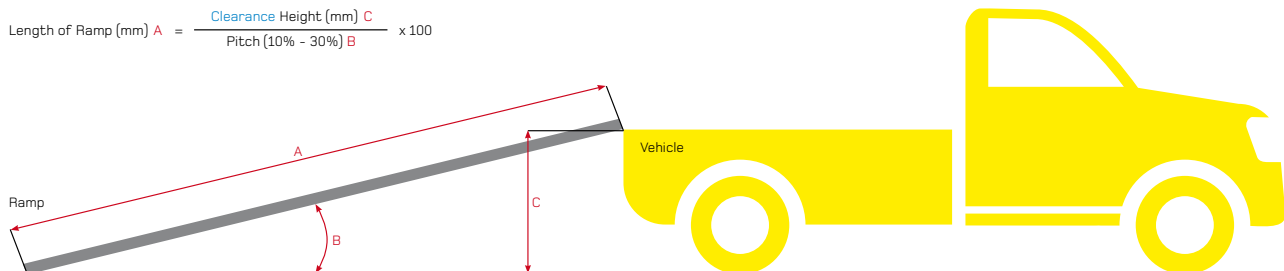

### OV100 LOADING RAMP

Series	Length		Width		Height		SWL		Weight per ramp	
	mm	in	mm	in	mm	in	kg	lbs	kg	lbs
OV100-20x150	1500	59.06	200	7.87	450	17.72	1709	3759.80	7	15.40
OV100-20x200	2000	78.74	200	7.87	600	23.62	1442	3172.40	10	22
OV100-20x250	2500	98.43	200	7.87	750	29.53	1318	2899.60	12	26.40
OV100-20x300	3000	118.11	200	7.87	900	35.43	1184	2604.80	14	30.80
OV100-20x350	3500	137.80	200	7.87	1050	41.34	970	2134.00	16	35.20
OV100-20x400	4000	157.48	200	7.87	1200	47.24	828	1821.60	18	39.60
OV100-40x150	1500	59.06	400	15.75	450	17.72	3068	6749.60	14	30.80
OV100-40x200	2000	78.74	400	15.75	600	23.62	2593	5704.60	19	41.80
OV100-40x250	2500	98.43	400	15.75	750	29.53	2375	5225.00	23	50.60
OV100-40x300	3000	118.11	400	15.75	900	35.43	2247	4943.40	27	59.40
OV100-40x350	3500	137.80	400	15.75	1050	41.34	1964	4320.80	32	70.40
OV100-40x400	4000	157.48	400	15.75	1200	47.24	1656	3643.20	36	79.20
OV100-60x150	1500	59.06	600	23.62	450	17.72	3352	7374.40	21	46.20
OV100-60x200	2000	78.74	600	23.62	600	23.62	3297	7253.40	28	61.60
OV100-60x250	2500	98.43	600	23.62	750	29.53	2998	6595.60	34	74.80
OV100-60x300	3000	118.11	600	23.62	900	35.43	2834	6234.80	41	90.20
OV100-80x150	1500	59.06	800	31.50	450	17.72	3881	8538.20	28	61.60
OV100-80x200	2000	78.74	800	31.50	600	23.62	3268	7189.60	37	81.40
OV100-80x250	2500	98.43	800	31.50	750	29.53	2987	6571.40	46	101.20
OV100-80x300	3000	118.11	800	31.50	900	35.43	2834	6234.80	55	121.00
OV100-100x150	1500	59.06	1000	39.37	450	17.72	3881	8538.20	35	77.00
OV100-100x200	2000	78.74	1000	39.37	600	23.62	3268	7189.60	46	101.20
OV100-100x250	2500	98.43	1000	39.37	750	29.53	2987	6571.40	57	125.40
OV100-100x300	3000	118.11	1000	39.37	900	35.43	2834	6234.80	68	149.60

Up and down

## Ramps small - OV110


The rigid aluminium lightweight ramp with a maximum capacity of 1450 kg (3190 lbs) this series offers an extremely cost-effective solution for materials handling with maximum safety and ease of use. Special anti-slip surface ensures safe operation in all environments.

OV110 is on top equipped with fold mechanism for low volume storage and better transportation possibilities. OV 100 & OV 110 are designed for commercial and industrial use.




### OV110 LOADING RAMPS - FOLDING

Foldable ramps are available in 4 widths

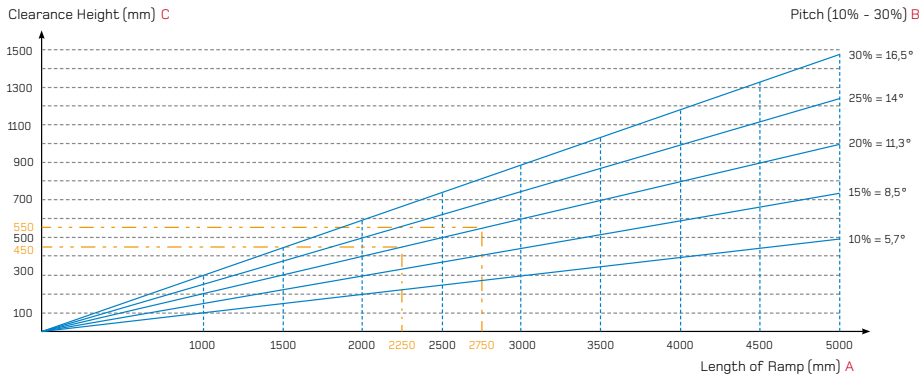

$$\text{Length of Ramp (mm) A} = \frac{\text{Clearance Height (mm) C}}{\text{Pitch (10\% - 30\%) B}} \times 100$$

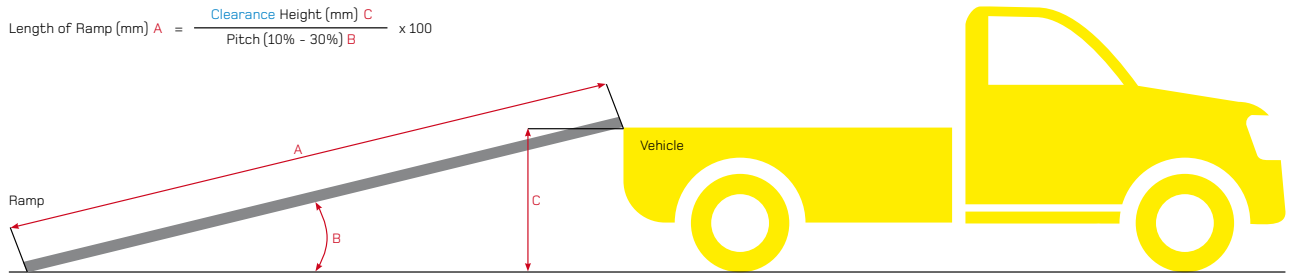

OV110 LOADING RAMP FOLDING										
Series	Length		Width		Height		SWL		Weight per ramp	
	mm	in	mm	in	mm	in	kg	lbs	kg	lbs
OV110-20x200	2000	78.74	200	7.87	600	23.62	667	1467.40	10	22
OV110-20x250	2500	98.43	200	7.87	750	29.53	533	1172.60	12	26.40
OV110-20x300	3000	118.11	200	7.87	900	35.43	400	880.00	14	30.80
OV110-40x200	2000	78.74	400	15.75	600	23.62	1300	2860.00	20	44
OV110-40x250	2500	98.43	400	15.75	750	29.53	1000	2200.00	24	52.80
OV110-40x300	3000	118.11	400	15.75	900	35.43	800	1760.00	29	63.80
OV110-60x200	2000	78.74	600	23.62	600	23.62	1450	3190.00	30	66
OV110-60x250	2500	98.43	600	23.62	750	29.53	1350	2970.00	36	79.20
OV110-60x300	3000	118.11	600	23.62	900	35.43	1200	2640.00	43	94.60
OV110-80x200	2000	78.74	800	31.50	600	23.62	1450	3190.00	40	88.00
OV110-80x250	2500	98.43	800	31.50	750	29.53	1350	2970.00	49	107.80
OV110-80x300	3000	118.11	800	31.50	900	35.43	1200	2640.00	57	125.40


Up and down

## Ramps small - BR300

BR300 are light-weight temporary bridges to provide safe pedestrian access in and around construction areas.

A special anti-slip surface allows safe crossing in the hardest of working conditions with loadings up to 1550 Kg (3417 lbs).

Integrated folding mechanism enables easy stacking of bridge modules.

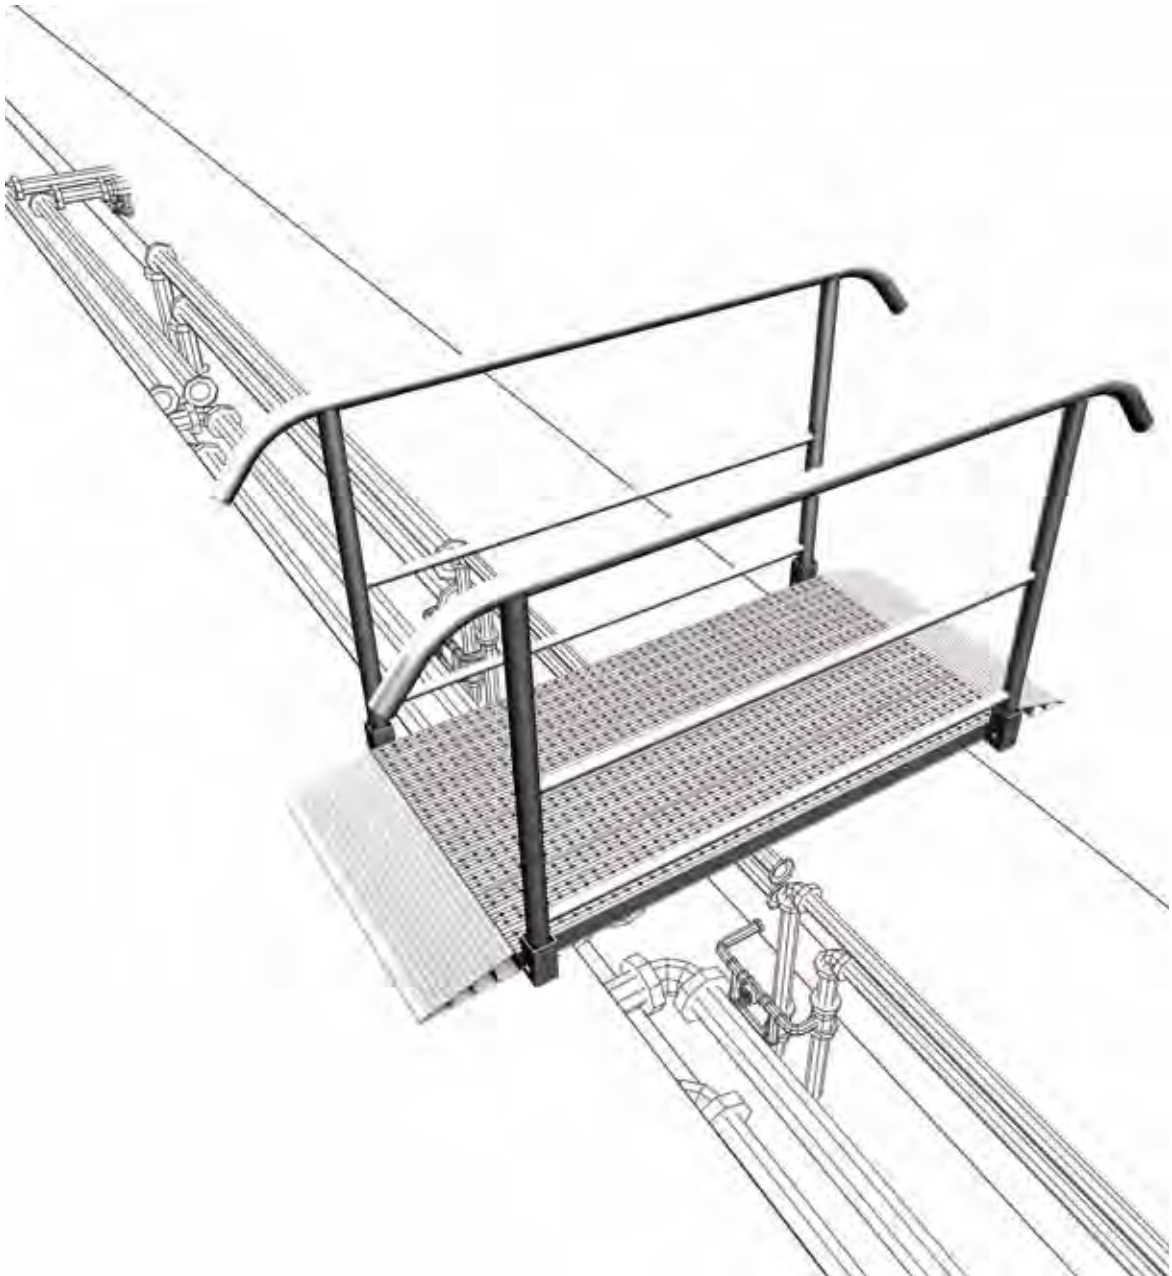



### BR300 TEMPORARY BRIDGE

Series	Length		Width		Height		SWL		Weight	
	mm	in	mm	in	mm	in	kg	lbs	kg	lbs
BR300-80x150	1500	59.06	800	31.50	36	1.42	1550	3417	36	79.30
BR300-80x200	2000	78.74	800	31.50	47	1.85	1417	3124	47	103.50
BR300-100x150	1500	59.06	1000	39.37	42	1.65	1550	3417	42	92.50
BR300-100x200	2000	78.74	1000	39.37	56	2.20	1417	3124	56	123.40

### BR300 TEMPORARY BRIDGE

Slight up / down slope makes use of the bridge more comfortable, guard-rails are demountable