

EXALITE


EXL-IP65 Par 15° RGBWAUV 126W



CE RoHS

Notice: because the policy of improve the products quality of our company. Maybe some data in the instructions will change in future. By that time, we won't inform you about the changed matters. Our reserve the right of changing correlative specification when improve the products. Publisher of the instruction will not responsible for veracity of information and some correlative results caused by this information.

1.The Introduction of LED display panel:

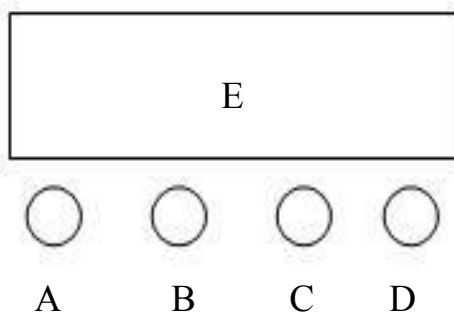

- A.Menu
- B. Up
- C. Down
- D.Enter
- E.LED display

Operation instruction: press “menu” to choose different effects, press “up” or “down” to set the function , press “enter” to confirm and save.

2. LED Menu:

No.	Menu	Description
1	A001	10CH dmx address,(001—512) B,C to set the value
2	d001	6CH dmx address,(001—512) B,C to set the value
3	R255	Red,(000—255) B,C to set the value
4	G255	Green,(000—255) B,C to set the value
5	B255	Blue,(000—255) B,C to set the value
6	W255	White,(000—255) B,C to set the value
7	A255	Amber,(000—255) B,C to set the value
8	P255	Purple,(000—255) B,C to set the value
9	FH99	Strobe(00—99) B,C to set the value
10	CL01	Color choose 01-08
11	CC01	Color Jump ,01-99
12	DE99	Color Fade,01-99
13	CP99	Color Pulse,01-99
14	SU01	01-08 Sound Strobe; 09 Sound color jump

3. DMX512 10CH (A001)

CH	Function	Description
1	Master dimmer	R,G,B,W master dimmer, 0~100%
2	R	Red dimmer,0~100%

3	G	Green dimmer,0~100%
4	B	Blue dimmer,0~100%
5	W	White dimmer,0~100%
6	A	Amber dimmer,0~100%
7	P	Purple dimmer, 0~100%
8	Strobe	R,G,B,W,A,Pmaster strobe, slow-fast
9	Macro	0—50: DMX ; 51 — 100:Color Choose; 101—150:Color Jump; 151—200:Color Fade; 201—250: Color pulse; 251-255:Sound
10	Macro speed	Slow-fast

4. DMX512 6CH (d001)

CH	Function	Description
1	R	Red dimmer,0~100%
2	G	Green dimmer,0~100%
3	B	Blue dimmer,0~100%
4	W	White dimmer,0~100%
5	A	Amber dimmer,0~100%
6	P	Purple dimmer,0~100%

5. Feature:

Easy operate, flicker free.

6.Parameter:

Voltage:AC100V-240V/50~60HZ

Lamp specification: 7pcs 18W rgbwap 6in1 LED

DMX512 channel:6/10CH

Control system:DMX512,sound,auto model/master and slave

Color effects: Color changing, strobe,Dimming 16bit 0-100%, fade,speed adjustment,etc.

Strobe: 1-20 flashes/second

Lens: 15°

Housing material: Aluminum ally

Housing color: black

Sockets: IP68 seetronic POWER IN&OUT,DMX IN&OUT sockets

IP Rating:IP65

Environment Temp: -20℃~40℃

Size: 17*22*20.5CM

N.W:2.9KG

Certification: CE, RoHS



PRODANCE, s.r.o.
Osadní 799/26, 170 00 Praha 7
T: 220 806 054 E: info@prodance.cz
www.prodance.cz